EMC Test Report

Product Type	:	ICP DAS I-7 Series I/O Converter
Applicant	:	ICP DAS CO., LTD.
Address	:	No. 111, Kuangfu N. Rd., Hukon Shiang, Hsinchu, Taiwan 303, R.O.C
Trade Name	:	ICP DAS
Model Number	:	I-7520A
Test Specification	:	EN 55022: 2010 +AC:2011 / Class A EN 55024: 2010 EN 61000-3-2: 2006 +A1:2009 + A2: 2009 / Class A EN 61000-3-3: 2008 EN 61000-4-2:2009 EN 61000-4-3:2006 +A1:2008 +A2:2010 EN 61000-4-4:2012 EN 61000-4-5:2006 EN 61000-4-6:2009 EN 61000-4-8:2010 EN 61000-4-11:2004
Receive Date	:	Jan. 29, 2014
Test Period	:	Feb. 05 ~ Feb. 10, 2014
Issue Date	:	Feb. 17, 2014

Issue by

A Test Lab Techno Corp.
No. 140-1, Changan Street, Bade City,
Taoyuan County 334, Taiwan R.O.C.
Tel：+886-3-2710188 / Fax：+886-3-2710190

Taiwan Accreditation Foundation accreditation number: 1330

Note: *This report shall not be reproduced except in full, without the written approval of A Test Lab Techno Corp. This document may be altered or revised by A Test Lab Techno Corp. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, or any government agencies. The test results in the report only apply to the tested sample.*

Revision History

Rev.	Issue Date	Revisions	Revised By
00	Feb. 13, 2014	Initial Issue	
01	Feb. 17, 2014	Revised report information.	Nina.Lin

Verification of Compliance

Issued Date: 02/17/2014

Product Type	:	ICP DAS I-7 Series I/O Converter
Applicant	:	ICP DAS CO., LTD.
Address	:	No. 111, Kuangfu N. Rd., Hukon Shiang, Hsinchu, Taiwan 303, R.O.C
Trade Name	:	ICP DAS
Model Number	:	I-7520A
EUT Rated Voltage	:	AC 100-250V, 50-60Hz, 2.0A
Test Voltage	:	230 Vac / 50 Hz
Applicable Standard	:	EN 55022:2010 +AC:2011 / Class A EN 55024:2010 EN 61000-3-2:2006+A1:2009+A2:2009 / Class A EN 61000-3-3:2008 EN 61000-4-2:2009 EN 61000-4-3:2006 +A1:2008 +A2:2010 EN 61000-4-4:2012 EN 61000-4-5:2006 EN 61000-4-6:2009 EN 61000-4-8:2010 EN 61000-4-11:2004
Test Result	:	Complied
Performing Lab.	:	A Test Lab Techno Corp. No. 140-1, Changan Street, Bade City, Taoyuan County 334, Taiwan R.O.C. Tel：+886-3-2710188 / Fax：+886-3-2710190 Taiwan Accreditation Foundation accreditation number: 1330 http://www.atl-lab.com.tw/e-index.htm

The above equipment has been tested by A Test Lab Techno Corp., and found compliance with the requirements set forth in the Electromagnetic Compatibility Directive 2004/108/EC and technical standards mentioned above. The results of testing in this report apply only to the product/system, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Approved By	: Cran Yang	Reviewed By	: Frank Lin	
(Manager)	(Cran Yang)	(Testing Engineer)	(Frank Lin)	

TABLE OF CONTENTS

1 General Information 5
2 EUT Description 8
3 Test Methodology 13
3.1. Decision of Test Mode 13
3.2. EUT Exercise Software 13
3.3. Configuration of Test System Details 14
3.4. Test Site Environment 16
4 Emission Test 17
4.1. Conducted Emission Measurement 17
4.2. Radiated Interference Measurement 25
4.3. Harmonics Current Measurement 34
4.4. Voltage Fluctuation and Flicker 39
5 Immunity Test 43
5.1. Electrostatic Discharge (ESD) 43
5.2. Radiated Electromagnetic Field (RS) 50
5.3. Electrical Fast Transient/Burst (EFT) 54
5.4. Surge 57
5.5. Conducted Susceptibility (CS) 61
5.6. Power Frequency Magnetic Field (PMF) 65
5.7. Voltage Dips and Interruption 68
6 EUT Photograph 72

1 General Information

1.1. Summary of Test Result

Emission			
Standard	Item	Result	Remark
EN 55022:2010 +AC:2011	Conducted Emission	PASS	Meet Class A limit
EN 55022: 2010+AC:2011	Radiated Emission	PASS	Meet Class A limit
EN 61000-3-2: 2006 +A1:2009 + A2: 2009	Harmonic current emissions	PASS	Meet Class A limit
EN 61000-3-3: 2008	Voltage fluctuations & flicker	PASS	Meets the requirements

Immunity			
Standard	Item	Result	Remark
EN 61000-4-2:2009	ESD	PASS	Meets the requirements of Criterion B
EN 61000-4-3:2006 +A1:2008 +A2:2010	RS	PASS	Meets the requirements of Criterion A
EN 61000-4-4:2012	EFT	PASS	Meets the requirements of Criterion B
EN 61000-4-5:2006	Surge	PASS	Meets the requirements of Criterion B
EN 61000-4-6:2009	CS	PASS	Meets the requirements of Criterion A
EN 61000-4-8:2010	PMF	PASS	Meets the requirements of Criterion A
EN 61000-4-11:2004	Voltage dips & voltage variations	PASS	Meets the requirements of Voltage Dips: 1) >95% reduction Criterion B 2) 30% reduction Criterion C Voltage Interruptions: 1) >95% reduction Criterion C

The test results of this report relate only to the tested sample(s) identified in this report. Manufacturer or whom it may concern should recognize the pass or fail of the test result.

1.2. Measurement Uncertainty

Conducted Emission

The measurement uncertainty is evaluated as ± 2.02 dB.

Conducted Emissions (Telecommunication Ports)

The measurement uncertainty is evaluated as ± 2.02 dB.

Radiated Emission

The Vertical measurement uncertainty of 30MHz - 1GHz is evaluated as ± 3.62 dB.

The Horizontal measurement uncertainty of 30MHz - 1GHz is evaluated as ± 3.98 dB.

The Vertical measurement uncertainty of 1GHz - 6GHz is evaluated as ± 3.07 dB.

The Horizontal measurement uncertainty of 1GHz - 6GHz is evaluated as ± 3.11 dB.

Harmonic Current Emission

The measurement uncertainty is evaluated as ± 1.2 %.

Voltage Fluctuations and Flicker

The measurement uncertainty is evaluated as ± 1.5 %.

Electrostatic Discharge

As what is concluded in the document from Note2 of clause 5.4.6.2 of ISO/IEC 17025: 2005[E], the requirements for measurement uncertainty in ESD testing are deemed to have been satisfied, and the testing is reported in accordance with the relevant ESD standards. The immunity test signal from the ESD system meet the required specifications in IEC 61000-4-2 through the calibration report with the calibrated uncertainty for the waveform of voltage and timing as being 1.52 % and 2.69%.

Radiated susceptibility

As what is concluded in the document from Note2 of clause 5.4.6.2 of ISO/IEC 17025: 2005[E], the requirements for measurement uncertainty in RS testing are deemed to have been satisfied, and the testing is reported in accordance with the relevant RS standards. The immunity test signal from the RS system meet the required specifications in IEC 61000-4-3 through the calibration for the uniform field strength and monitoring for the test level with the uncertainty evaluation report for the electrical filed strength as being 2.65 dB.

Electrical fast transient/burst

As what is concluded in the document from Note2 of clause 5.4.6.2 of ISO/IEC 17025: 1999[2], the requirements for measurement uncertainty in EFT/Burst testing are deemed to have been satisfied, and the testing is reported in accordance with the relevant FT/Burst standards. The immunity test signal from the FT/Burst system meet the required specifications in IEC 61000-4-4 through the calibration report with the calibrated uncertainty for the waveform of voltage. Frequency and timing as being 1.57% and 2.73%.

Surge

As what is concluded in the document from Note2 of clause 5.4.6.2 of ISO/IEC 17025: 2005[E], the requirements for measurement uncertainty in Surge testing are deemed to have been satisfied, and the testing is reported in accordance with the relevant Surge standards. The immunity test signal from the Surge system meet the required specifications in IEC 61000-4-5 through the calibration report with the calibrated uncertainty for the waveform of voltage and timing as being 1.58 % and 2.71%.

Conducted susceptibility

As what is concluded in the document from Note2 of clause 5.4.6.2 of ISO/IEC 17025: 2005[E], the requirements for measurement uncertainty in CS testing are deemed to have been satisfied, and the testing is reported in accordance with the relevant CS standards. The immunity test signal from the CS system meet the required specifications in IEC 61000-4-6 through the calibration for unmodulated signal and monitoring for the test level with the uncertainty evaluation report for the injected modulated signal level through CDN and EM Clamp/Direct Injection as being 3.68 dB and 2.72 dB.

Power frequency magnetic field

As what is concluded in the document from Note2 of clause 5.4.6.2 of ISO/IEC 17025: 2005[E], the requirements for measurement uncertainty in PFM testing are deemed to have been satisfied, and the testing is reported in accordance with the relevant PFM standards. The immunity test signal from the PFM system meet the required specifications in IEC 61000-4-8 through the calibration report with the calibrated uncertainty for the Gauss Meter to verify the output level of magnetic field strength as being 1.8 %.

Voltage dips and interruption

As what is concluded in the document from Note2 of clause 5.4.6.2 of ISO/IEC 17025: 2005[E], the requirements for measurement uncertainty in DIP testing are deemed to have been satisfied, and the testing is reported in accordance with the relevant DIP standards. The immunity test signal from the DIP system meet the required specifications in IEC 61000-4-11 through the calibration report with the calibrated uncertainty for the waveform of voltage and timing as being 1.58 % and 2.72%.

2 EUT Description

Product Type	:	ICP DAS I-7 Series I/O Converter
Trade Name	:	ICP DAS
Model Number	:	I-7520A
Applicant	:	ICP DAS CO., LTD. No. 111, Kuangfu N. Rd., Hukon Shiang, Hsinchu, Taiwan 303, R.O.C
Manufacturer	:	ICP DAS CO., LTD. No. 111, Kuangfu N. Rd., Hukon Shiang, Hsinchu, Taiwan 303, R.O.C

I/O Port Description：

I/O Port Types	Q'TY	Test Description
1). LAN Port	1	Connected to PC
2). RS-232 Port	1	Connected to PC
3). USB Port	1	Connected to PC
4). AC Power Port	1	Connected to AC input
5). Signal Port	2	Connected to EUT

Feature of Equipment under Test：

The model listed below is series model to I-7520A.

Main	Software	Diversity	Mode 1
I-7520	---	Isolated RS-232 to RS-485 Converter	
I-7520A	---	IsolIsolated RS-232 to RS-422/485 Converter	V
I-7520R	---	RS-232 to Isolated RS-485 Converter	
I-7520AR	---	RS-232 to Isolated RS-422/485 Converter	V
I-7510	---	Isolated RS-485 Repeater	
I-7510A	---	Isolated RS-422/485 Repeater/Converter	V
I-7510AR	---	Three Way Isolated RS-422/485 Repeater/Converter	V
I-7561	---	USB to Isolated RS-485 Converter	V
I-7513	---	Three Way Isolated RS-485 Active Star Wiring Hub	V
I-7514U	---	Isolated 4 Channels RS-485 Repeater/Hub/Splitter	V
I-7018	---	8-channel Analog Input Module	V
I-7017	---	8-channel Analog Input Module with DCON Protocol	
M-7017	---	8-channel Analog Input Module with DCON and Modbus RTU Protocols	V
I-7017F	---	8-channel Analog Input Module with DCON Protocol (Fast Sampling Version)	
TPD-280	---	2.8" Touch HMI device with RS-485	V
TPD-283	---	2.8" Touch HMI device with Ethernet (PoE)	V
TPD-283-BK	---	2.8” Touch HMI device with Ethernet	
M-7055	---	8-channel Isolated Digital Input and 8-channel Isolated Digital Output Module	
M-7055D	---	M-7055 with LED Display	V
I-7055	---	8-channel Isolated Digital Input and 8-channel Isolated Digital Output Module with DCON Protocol	
I-7055D	---	I-7055 with LED Display	
M-7055-NPN	---	8-channel Isolated Digital Input and 8-channel Isolated Digital Output Module with DCON and Modbus Protocols	V
M-7055D-NPN	---	M-7055-NPN with LED Display	
I-7055-NPN	---	8-channel Isolated Digital Input and 8-channel Isolated Digital Output Module with DCON and Modbus Protocols	
I-7055D-NPN	---	I-7055-NPN with LED Display	
I-7051	---	16-channel Isolated Digital Input Module with DCON Protocol	
I-7051D	---	I-7051 with LED Display	V
M-7051	---	16-channel Isolated Digital Input Module with DCON and Modbus Protocols	
M-7051D	---	M-7051 with LED Display	

Main	Software	Diversity	Mode 1
I-7551	---	Isolated RS-232 to RS-232 Converter	V
I-7045	---	16-channel Isolated Digital Output Module with DCON Protocol	
I-7045D	---	I-7045 with LED Display	V
M-7045	---	16-channel Isolated Digital Output Module with DCON and Modbus Protocols	
M-7045D	---	M-7045-G with LED Display	
I-7045-NPN	---	16-channel Isolated Digital Output Module with DCON Protocol	
I-7045D-NPN	---	I-7045-NPN-G with LED Display	V
M-7045-NPN	---	16-channel Isolated Digital Output Module with DCON and Modbus Protocols	
M-7045D-NPN	---	M-7045-NPN-G with LED Display	
I-7052	---	8-channel Isolated Digital Input Module with 16-bit Counters	
I-7052D	---	I-7052D with LED Display	V
M-7052	---	8-channel Isolated Digital Input Module with DCON and Modbus Protocols	
M-7052D	---	M-7052 with LED Display	
I-7065	---	4-channel Isolated Digital Input and 5-channel Relay Output Module using the DCON Protocol	
I-7065D	---	I-7065 with LED Display	V
M-7065	---	4-channel Isolated Digital Input and 5-channel Relay Output Module using the DCON and Modbus Protocols	
M-7065D	---	M-7065-G with LED Display	
I-7017C	---	8-channel Current Input Module using the DCON Protocol	V
M-7017C	---	8-channel Current Input Module using the DCON and Modbus Protocol	
I-7017FC	---	8-channel Current Input Module using the DCON Protocol (fast sampling version)	
I-7017RC	---	8-channel Analog Input Module using the DCON Protocol with High Voltage Protection	V
M-7017RC	---	8-channel Analog Input Module using the DCON and Modbus RTU Protocol with High Voltage Protection	
I-7067	---	7-channel Relay Output Module	
I-7067D	---	I-7067D with LED Display	V
I-7043	---	16-channel Non-isolated Digital Output Module using the DCON Protocol	
I-7043D	---	I-7043 with LED Display	V
I-7024	---	4-channel Analog Output Module with DCON Protocol	
I-7024R	---	4-channel Analog Output and 5-channel DI Module with DCON Protocol	V

Main	Software	Diversity	Mode 1
M-7024	---	4-channel Analog Output Module with DCON and Modbus Protocol	
M-7024R	---	4-channel Analog Output and 5-channel DI Module with DCON and Modbus Protocol	
M-7005	---	8-channel Thermistor Input and 6 channel Alarm Output Module	V
I-7018R	---	8-channel Analog Input Module with High Voltage Protection	V
I-7017R	---	8-channel Analog Input Module using the DCON Protocol	V
M-7017R	---	8-channel Analog Input Module using the DCON and Modbus RTU Protocol	
I-7017R-A5	---	8-channel Analog Input Module using the DCON Protocol	
M-7017R-A5	---	8-channel Analog Input Module using the DCON and Modbus RTU Protocol	
NS-208A	---	Unmanaged 8-port Industrial 10/100 Mbps Ethernet Switch	V
NSM-208A	---	Unmanaged 8-port Industrial 10/100 Mbps Ethernet Switch with Metal Casing	
I-2533CS-A	---	CAN to Single Mode Fiber Bridge ; 1 (15 Km) single mode, SC connector, TX 1310 nm, RX 1550 nm	V
I-2533CS-B	---	CAN to Single Mode Fiber Bridge ; 1 (15 Km) single mode, SC connector, TX 1550 nm, RX 1310 nm	V
NS-105PSE-24V	---	Unmanaged 5-port 10/100 Mbps PoE (PSE) Ethernet Switch; +24 VDC Input	
NS-205PSE-24V	---	Unmanaged 5-port 10/100 Mbps PoE (PSE) Ethernet Switch; +24 VDC Input	V
NSM-205PSE-24V	---	Unmanaged 5-port 10/100 Mbps PoE (PSE) Ethernet Switch with Metal Casing; +24 VDC Input	
tDS-712	---	Tiny Device Server with PoE and 1 RS-232 Port	V
tGW-712	---	Tiny Modbus/TCP to RTU/ASCII gateway with PoE and 1 RS-232 Port	
tDS-722	---	Tiny Device Server with PoE and 2 RS-232 Ports	
tDS-732	---	Tiny Device Server with PoE and 3 RS-232 Ports	V
tGW-722	---	Tiny Modbus/TCP to RTU/ASCII gateway with PoE and 2 RS-232 Ports	
tGW-732	---	Tiny Modbus/TCP to RTU/ASCII gateway with PoE and 3 RS-232 Ports	
tDS-715	---	Tiny Device Server with PoE and 1 RS-422/485 Port	
tDS-718	---	Tiny Device Server with PoE and 1 RS-232/422/485 Port	V
tGW-718	---	Tiny Modbus/TCP to RTU/ASCII gateway with PoE and 1 RS-232/422/485 Port	
tGW-715	---	Tiny Modbus/TCP to RTU/ASCII gateway with PoE and 1 RS-422/485	
GW-7472	---	Tiny EtherNet/IP to Modbus RTU/TCP gateway with PoE and 1 RS-422/485	

Main	Software	Diversity	Mode 1
NS-200PS	---	Industrial PoE Splitter	V
ET-7065	---	Ethernet I/O Module with 6-ch PhotoMOS Relay, 6-ch DI	V
PPDS-743-MTCP	---	Programmable Device Server with PoE, Modbus Gateway, 3 RS-232 ports and 1 RS-485 port (RoHS) Includes One CA-0910 Cable	
PPDSM-743-MTCP	---	PPDS-743-MTCP CR with Metal Case	
PPDS-743D-MTCP	---	Programmable Device Server with PoE, Modbus Gateway, 3 RS-232 ports, 1 RS-485 port and an LED Display (RoHS) Includes One CA-0910 Cable	V
PPDSM-743D-MTCP	---	PPDS-743D-MTCP CR with Metal Case	
I-7188E3	---	I-7188E3D without LED display	
I-7188E3D	---	Internet communication controller with one RS-232, one RS-485 ,one RS-422/RS-485 ,DI/O and one Ethernet	V
I-7188E2	---	Internet communication controller with one RS-232, one RS-485 and one Ethernet	V
I-7188E2-MTCP	---	I-7188E2D with default Modbus/TCP firmware	
I-7188E2D	---	I-7188E2D without LED display	
X110	---	14-channel D/I	V

3 Test Methodology

3.1. Decision of Test Mode

The following test mode(s) were scanned during the preliminary test:

Pre-Test Mode
Mode 1: Normal Operation Mode

After the preliminary scan, the following test mode was found to produce the highest emission level.

Final Test Mode		
Emission	Conducted Emission	Mode 1
	Radiated Emission	Mode 1
	Harmonic current emissions	Mode 1
	Voltage fluctuations & flicker	Mode 1
Immunity	ESD	Mode 1
	RS	Mode 1
	EFT	Mode 1
	Surge	Mode 1
	CS	Mode 1
	PMF	Mode 1
	Voltage dips & voltage variations	Mode 1

Then, the above highest emission mode of the configuration of the EUT and cable was chosen for all final test items.

3.2. EUT Exercise Software

1. Setup the EUT and simulators as shown on 3.3.
2. Turn on the power of all equipment.
3. The EUT will start to operate function.

3.3. Configuration of Test System

Mode 1

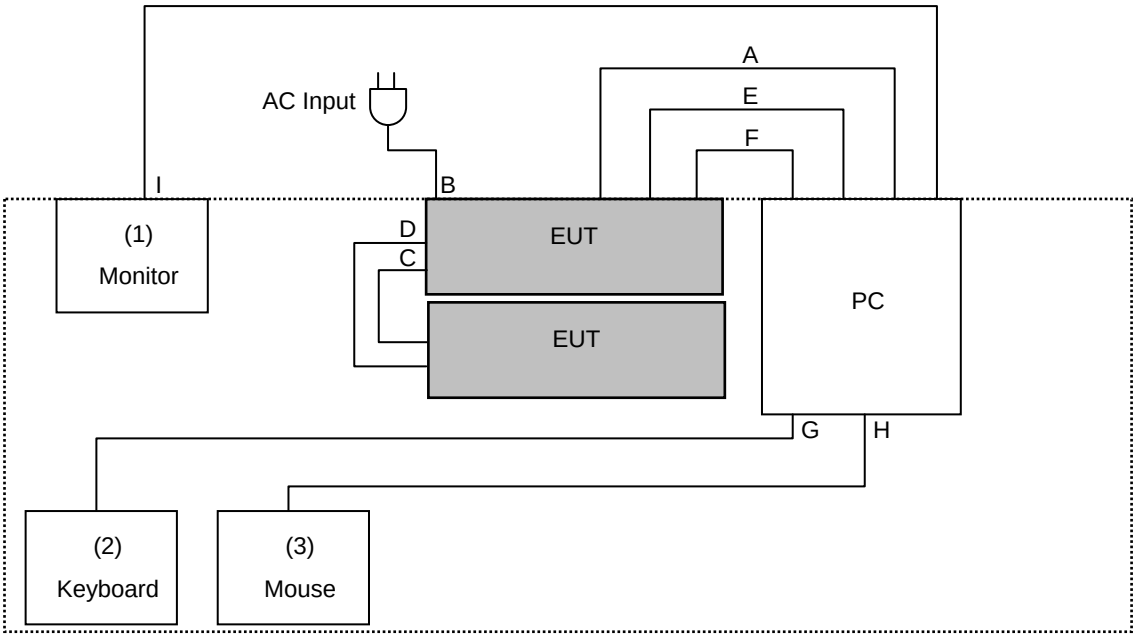

Signal Cable Type		Signal Cable Description
A	LAN Cable	Shielded, 1.8m with one core
B	AC Power Cable	Non-Shielded, 1.7m with one core
C	DC Power Cable	Non-Shielded, 0.5m
D	RS-232 Cable	Non-Shielded, 0.5m with one core
E	RS-232 Cable	Shielded, 1.7m with two cores
F	USB Cable	Shielded, 1.7m with two cores
G	P/S 2 Cable	Shielded, 1.8m
H	P/S 2 Cable	Shielded, 1.8m
I	O-Sub Cable	Shielded, 1.8m with two cores

Devices Description					
Product		Manufacturer	Model Number	Serial Number	Power Cord
(1)	Monitor	DELL	U2711	CN0H530T7426105K043L	Non-Shielded, 1.8m
(2)	Keyboard	HP	SK-2880	BC3520FJ6X5310	Power by PC
(3)	Mouse	DELL	MOC5UO	HOX06NVO	Power by PC
(4)	PC	ICP DAS	VB-115H	N/A	Non-Shielded, 1.7m

※ PC Keypart information				
Main		Software	Diversity	Mode 1
(4)-1	VXC-144U	---	Universal PCI, Serial Communication Board with 4 RS-422/485 ports (RoHS). Includes One CA-4002 Connector	V
(4)-2	PISO-725	---	8-channel Relay Output & 8-channel Isolated Digital Input Board Includes one CA-4002 D-Sub connector.	V
(4)-3	PCI-TMC12A	---	12-channel Timer/Counter Board Includes one CA-4002 D-Sub connector.	V
(4)-4	DIO-144	---	144-channel Digital I/O Board	V
(4)-5	DIO-96	---	96-channel Digital I/O Board	

Support Unit					
Product		Manufacturer	Model Number	Serial Number	Power Cord
1.	Industrial Power Supply	ICP DAS	DP-1200	N/A	Non-Shielded, 1.7m with one core

3.4. Test Site Environment

Items	Test Item	Required (IEC 60068-1)	Actual
Temperature (°C)	EN 55022 CE	15-35	26.0
Humidity (%RH)		25-75	60.0
Barometric pressure (mbar)		860-1060	950
Temperature (°C)	EN 55022 RE	15-35	26.0
Humidity (%RH)		25-75	60.0
Barometric pressure (mbar)		860-1060	950
Temperature (°C)	EN 61000-3-2	--	26.0
Humidity (%RH)		--	60.0
Barometric pressure (mbar)		--	950
Temperature (°C)	EN 61000-3-3	--	26.0
Humidity (%RH)		--	60.0
Barometric pressure (mbar)		--	950
Temperature (°C)	EN 61000-4-2	15-35	24.0
Humidity (%RH)		30-60	43.6
Barometric pressure (mbar)		860-1060	950
Temperature (°C)	EN 61000-4-3	--	20.1
Humidity (%RH)		--	54.2
Barometric pressure (mbar)		--	950
Temperature (°C)	EN 61000-4-4	15-35	22.3
Humidity (%RH)		30-60	54.8
Barometric pressure (mbar)		860-1060	950
Temperature (°C)	EN 61000-4-5	15-35	24.0
Humidity (%RH)		10-75	52.1
Barometric pressure (mbar)		860-1060	950
Temperature (°C)	EN 61000-4-6	--	24.0
Humidity (%RH)		--	52.1
Barometric pressure (mbar)		--	950
Temperature (°C)	EN 61000-4-8	15-35	22.6
Humidity (%RH)		25-75	51.6
Barometric pressure (mbar)		860-1060	950
Temperature (°C)	EN 61000-4-11	15-35	19.1
Humidity (%RH)		25-75	54.6
Barometric pressure (mbar)		860-1060	950

4 Emission Test

4.1. Conducted Emission Measurement

4.1.1. Limit

A.C. Mains Conducted Interference Limit：

Frequency (MHz)	Class A Equipment (dBuV)		Class B Equipment (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79	66	66 - 56	56 - 46
0.50 - 5.0	73	60	56	46
5.0 - 30.0	73	60	60	50

Note: (1) The lower limit shall apply at the transition frequencies.

(2) The limit decreases in line with the logarithm of the frequency in the range 0.15 to 0.50 MHz.

Telecommunication Port Conducted Interference Limits:

Requirement (MHz)	Class A Equipment				Class B Equipment			
	Voltage Limit (dBμV)		Current Limit (dBμA)		Voltage Limit (dBμV)		Current Limit (dBμA)	
	QP	Avg.	QP	Avg.	QP	Avg.	QP	Avg.
0.15 to 0.50	97 to 87	84 to 74	53 to 43	40 to 30	84 to 74	74 to 64	40 to 30	30 to 20
0.50 to 30	87	74	43	30	74	64	30	20

4.1.2. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Test Receiver	R&S	ESCI	100367	06/06/2013	(1)
LISN	R&S	ENV216	101040	03/04/2013	(1)
LISN	R&S	ENV216	101041	03/04/2013	(1)
T-LISN	FCC	FCC-TLISN-T2-02	20574	04/19/2013	(1)
T-LISN	FCC	FCC-TLISN-T4-02	20529	04/19/2013	(1)
T-LISN	TESQ	ISN-T8	34413	04/25/2013	(1)
Test Site	ATL	TE02	TE02	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

4.1.3. Test Setup

A.C. Mains Setup

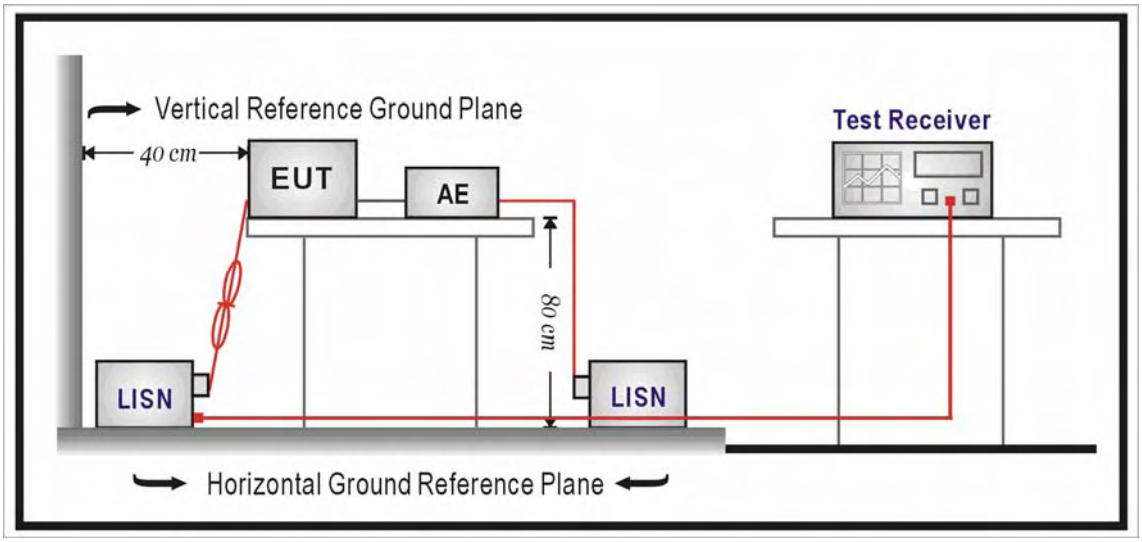

Telecommunication Port Setup

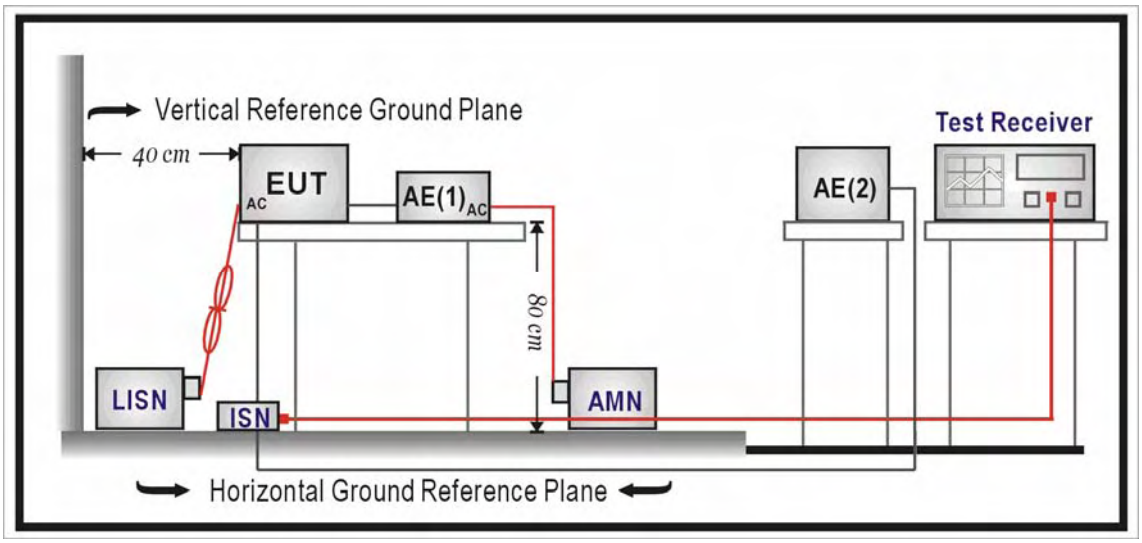

4.1.4. Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination.
The mains voltage shall be supplied to the EUT via the LISN when the measurement of telecommunication port is performed. The common mode disturbances at the telecommunication port shall be connected to the ISN.

For A.C. mains conducted interference, measured both sides of A.C. lines and carried out using quasi-peak and average detector receivers of maximum conducted interference.

For telecommunication port interference measurement, using ISNs with suitable longitudinal conversion losses (LCL) as defined in the port of specification from manufacture, and the LCL shall be meet the related standard requirement. Measured the line and carried out using quasi-peak and average detector receivers of maximum conducted interference.

Conducted emissions were invested over the frequency range from 0.15 MHz to 30 MHz using a receiver bandwidth of 9 kHz. The equipment under test (EUT) shall be meet the limits in section 4.1.2, as applicable, including the average limit and the quasi-peak limit when using respectively (A.C. mains and telecommunication port), an average detector and quasi-peak detector measured in accordance with the methods described of related standard. Either the voltage limits or the current limits shall be met. If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.

If the reading of the measuring receiver shows fluctuations close to the limit, the reading shall be observed for at least 15 s at each measurement frequency; the higher reading shall be recorded with the exception of any brief isolated high reading which shall be ignored.

4.1.5. Test Result

Standard:	EN 55022 Class A	Line:	L1
Test item:	Conducted Emission	Power:	AC 230V/50Hz
Model Number:	I-7520A	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH
Mode:	Mode 1	Date:	2014/02/05
		Test By:	Frank Lin
Description:			

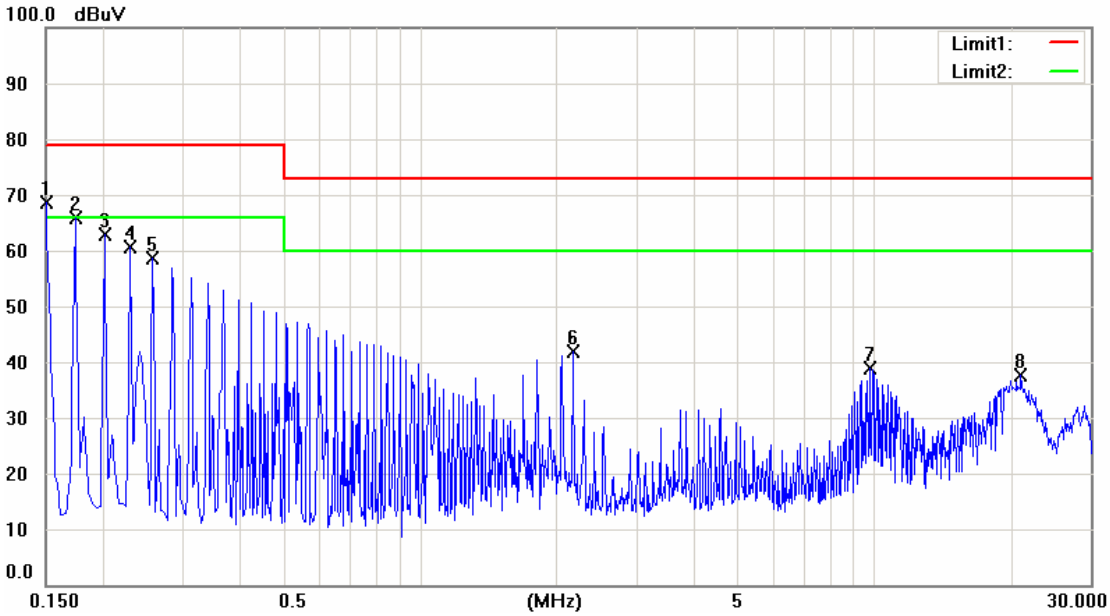

No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1500	52.46	20.79	9.62	62.08	30.41	79.00	66.00	-16.92	-35.59	Pass
2	0.1740	49.47	17.66	9.62	59.09	27.28	79.00	66.00	-19.91	-38.72	Pass
3	0.2020	46.61	15.23	9.62	56.23	24.85	79.00	66.00	-22.77	-41.15	Pass
4	0.2300	44.17	13.24	9.62	53.79	22.86	79.00	66.00	-25.21	-43.14	Pass
5	0.2580	42.10	11.16	9.62	51.72	20.78	79.00	66.00	-27.28	-45.22	Pass
6	2.1780	31.86	31.81	9.70	41.56	41.51	73.00	60.00	-31.44	-18.49	Pass
7	9.8020	26.51	24.69	10.09	36.60	34.78	73.00	60.00	-36.40	-25.22	Pass
8	21.0540	24.69	18.96	9.78	34.47	28.74	73.00	60.00	-38.53	-31.26	Pass

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).
2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

Standard:	EN 55022 Class A	Line:	N
Test item:	Conducted Emission	Power:	AC 230V/50Hz
Model Number:	I-7520A	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH
Mode:	Mode 1	Date:	2014/02/05
		Test By:	Frank Lin
Description:			

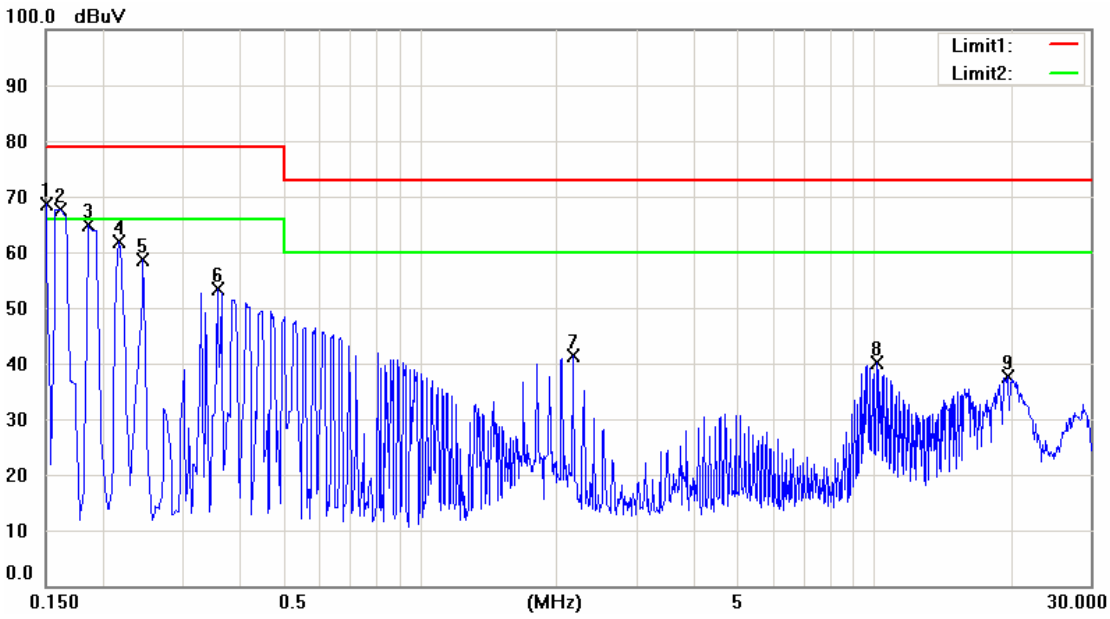

No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1500	52.51	20.84	9.63	62.14	30.47	79.00	66.00	-16.86	-35.53	Pass
2	0.1620	50.91	19.05	9.63	60.54	28.68	79.00	66.00	-18.46	-37.32	Pass
3	0.1860	48.21	16.64	9.63	57.84	26.27	79.00	66.00	-21.16	-39.73	Pass
4	0.2180	45.26	13.89	9.63	54.89	23.52	79.00	66.00	-24.11	-42.48	Pass
5	0.2460	43.05	29.53	9.63	52.68	39.16	79.00	66.00	-26.32	-26.84	Pass
6	0.3580	36.60	8.69	9.63	46.23	18.32	79.00	66.00	-32.77	-47.68	Pass
7	2.1780	30.91	30.75	9.70	40.61	40.45	73.00	60.00	-32.39	-19.55	Pass
8	10.1620	26.57	24.34	10.10	36.67	34.44	73.00	60.00	-36.33	-25.56	Pass
9	19.7140	26.35	23.76	9.85	36.20	33.61	73.00	60.00	-36.80	-26.39	Pass

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

Standard:	EN 55022 Class A	Line:	N/A
Test item:	Conducted Emission	Power:	AC 230V/50Hz
Model Number:	I-7520A	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH
Mode:	Mode 1 (ISN 10M)	Date:	2014/02/05
		Test By:	Frank Lin
Description:			

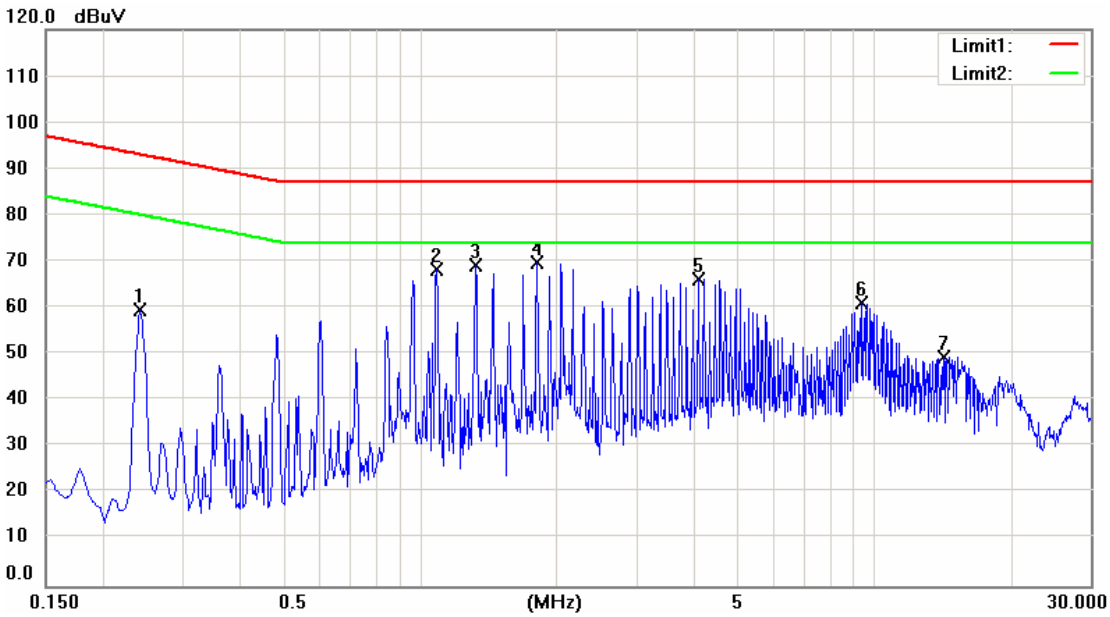

No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.2420	49.03	48.28	9.97	59.00	58.25	93.03	80.03	-34.03	-21.78	Pass
2	1.0900	57.05	56.58	9.71	66.76	66.29	87.00	74.00	-20.24	-7.71	Pass
3	1.3300	59.14	58.28	9.71	68.85	67.99	87.00	74.00	-18.15	-6.01	Pass
4	1.8140	60.44	59.47	9.69	70.13	69.16	87.00	74.00	-16.87	-4.84	Pass
5	4.1100	56.04	55.24	9.61	65.65	64.85	87.00	74.00	-21.35	-9.15	Pass
6	9.4300	49.93	48.96	9.95	59.88	58.91	87.00	74.00	-27.12	-15.09	Pass
7	14.2660	37.51	33.43	9.66	47.17	43.09	87.00	74.00	-39.83	-30.91	Pass

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).
2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

Standard:	EN 55022 Class A	Line:	N/A
Test item:	Conducted Emission	Power:	AC 230V/50Hz
Model Number:	I-7520A	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH
Mode:	Mode 1 (ISN 100M)	Date:	2014/02/05
		Test By:	Frank Lin
Description:			

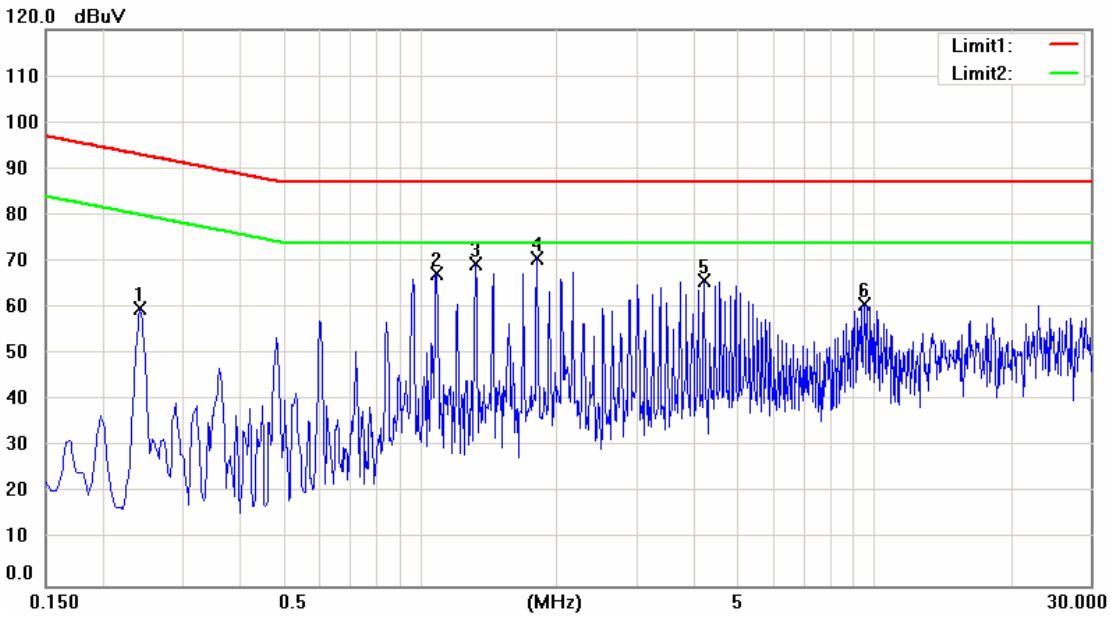

No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.2420	49.51	48.50	9.97	59.48	58.47	93.03	80.03	-33.55	-21.56	Pass
2	1.0900	56.69	56.19	9.71	66.40	65.90	87.00	74.00	-20.60	-8.10	Pass
3	1.3300	59.12	58.24	9.71	68.83	67.95	87.00	74.00	-18.17	-6.05	Pass
4	1.8140	60.16	60.11	9.69	69.85	69.80	87.00	74.00	-17.15	-4.20	Pass
5	4.2300	56.23	55.54	9.61	65.84	65.15	87.00	74.00	-21.16	-8.85	Pass
6	9.5460	50.20	48.20	9.95	60.15	58.15	87.00	74.00	-26.85	-15.85	Pass

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

4.1.6. Test Photograph

Test Mode: Mode 1

Description: Front View of Conducted Test

Test Mode: Mode 1

Description: Back View of Conducted Test

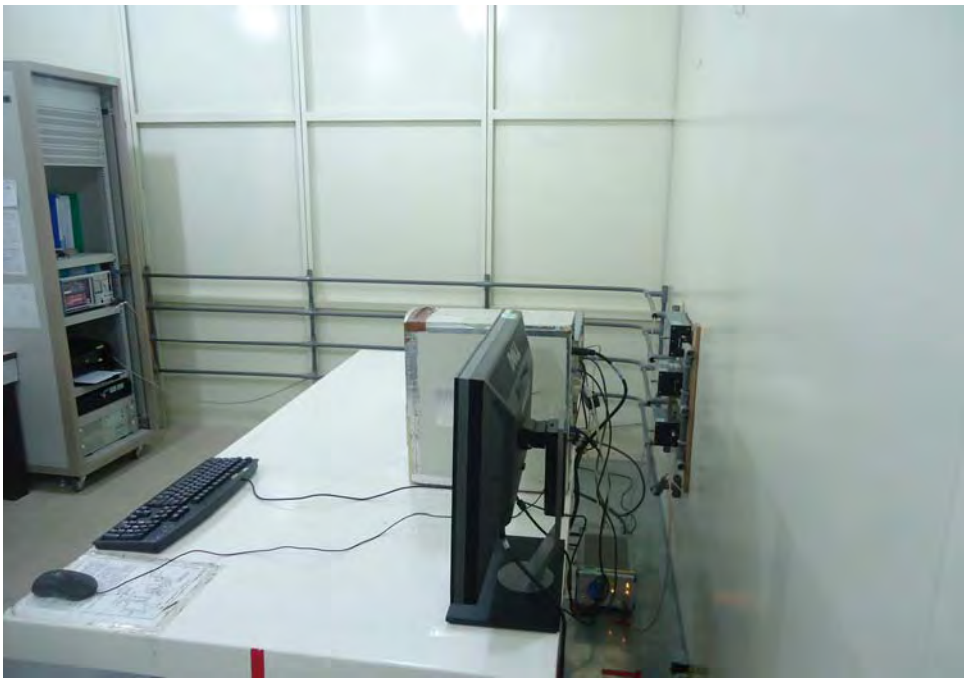

4.2. Radiated Interference Measurement

4.2.1. Limit

Frequency (MHz)	dBuV/m (Distance 10m)	
	Class A	Class B
30 ~ 230	40	30
230 ~ 1000	47	37

NOTE: The lower limit shall apply at the transition frequencies.

Frequency (MHz)	dBuV/m (Distance 3m)			
	Class A		Class B	
	Average	Peak	Average	Peak
1000 ~ 3000	56	76	50	70
3000 ~ 6000	60	80	54	74

NOTE: The lower limit shall apply at the transition frequencies.

4.2.2. Test Instruments

10 Meter Chamber					
Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Pre Amplifier	Agilent	8447D	2944A11120	01/10/2014	(1)
Pre Amplifier	Agilent	8447D	2944A11119	01/10/2014	(1)
Test Receiver	R&S	ESCI	100722	10/26/2013	(1)
Test Receiver	R&S	ESCI	101000	12/03/2013	(1)
Broadband Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB 9160	9160-3268	06/05/2013	(1)
Broadband Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB 9160	9160-3273	11/29/2013	(1)
Test Site	ATL	TE06	TE06	08/10/2013	(1)

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.

3 Meter Chamber					
Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
RF Pre-selector	Agilent	N9039A	MY46520256	01/10/2014	(1)
Spectrum Analyzer	Agilent	E4446A	MY46180578	01/10/2014	(1)
Pre Amplifier	Agilent	8449B	3008A02237	02/22/2013	(1)
Pre Amplifier	Agilent	8447D	2944A10961	02/22/2013	(1)
Horn Antenna (1~18GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA9120D	9120D-550	06/10/2013	(1)
Test Site	ATL	TE01	888001	08/28/2013	(1)

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.

4.2.3. Setup

Below 1GHz

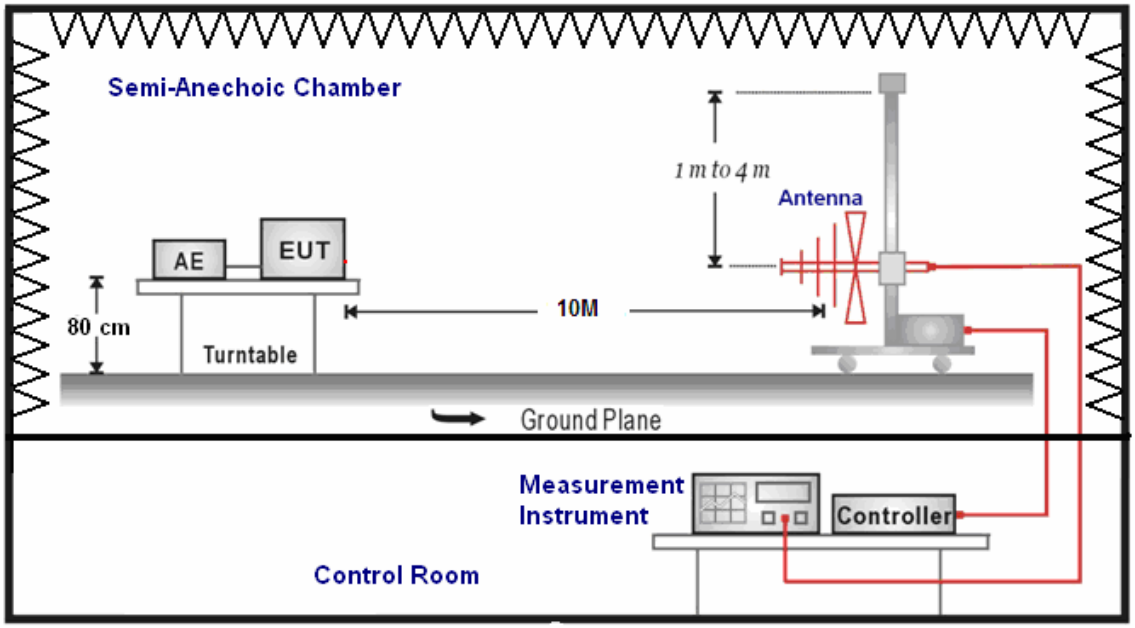

Above 1GHz

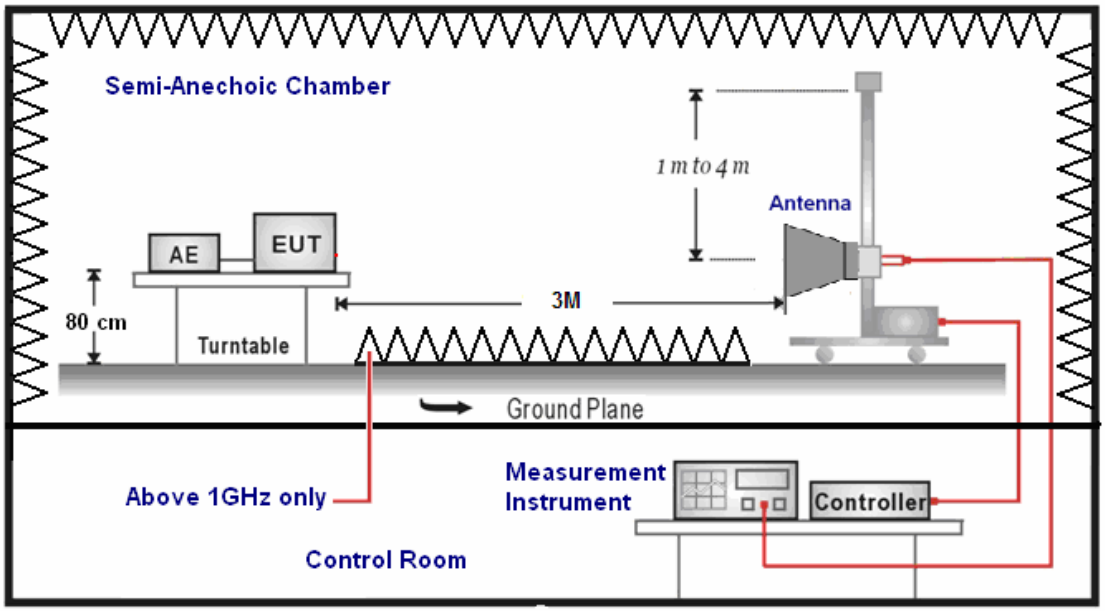

4.2.4. Test Procedure

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. When the EUT is floor- standing equipment, it is placed on the ground plane which has a 15 cm non-conductive covering to insulate the EUT from the ground plane.

The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 10 meters for under 1GHz, and 3 meter for above 1GHz if the highest internal source frequency of the EUT is higher than 108 MHz. The highest internal source of a EUT is defined as the highest frequency generated or used within the EUT or on which the EUT operates or tunes. If the highest frequency of the internal sources of the EUT is less than 108 MHz, the measurement shall only be made up to 1 GHz. If the highest frequency of the internal sources of the EUT is between 108 MHz and 500 MHz, the measurement shall only be made up to 2 GHz. If the highest frequency of the internal sources of the EUT is between 500 MHz and 1 GHz, the measurement shall only be made up to 5 GHz. If the highest frequency of the internal sources of the EUT is above 1 GHz, the measurement shall be made up to 5 times the highest frequency or 6 GHz, whichever is less.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level. Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated on radiated measurement.

Radiated emissions were invested over the frequency range from 30MHz to1GHz using a receiver bandwidth of 120 kHz. Radiated was performed at an antenna to EUT distance of 10 meters.

4.2.5. Test Result

Standard:	EN 55022 Class A	Test Distance:	10m
Test item:	Radiated Emission	Power:	AC 230V/50Hz
Model Number:	I-7520A	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH
Mode:	Mode 1	Date:	2014/02/05
Ant.Polar.:	Horizontal	Test By:	Frank Lin

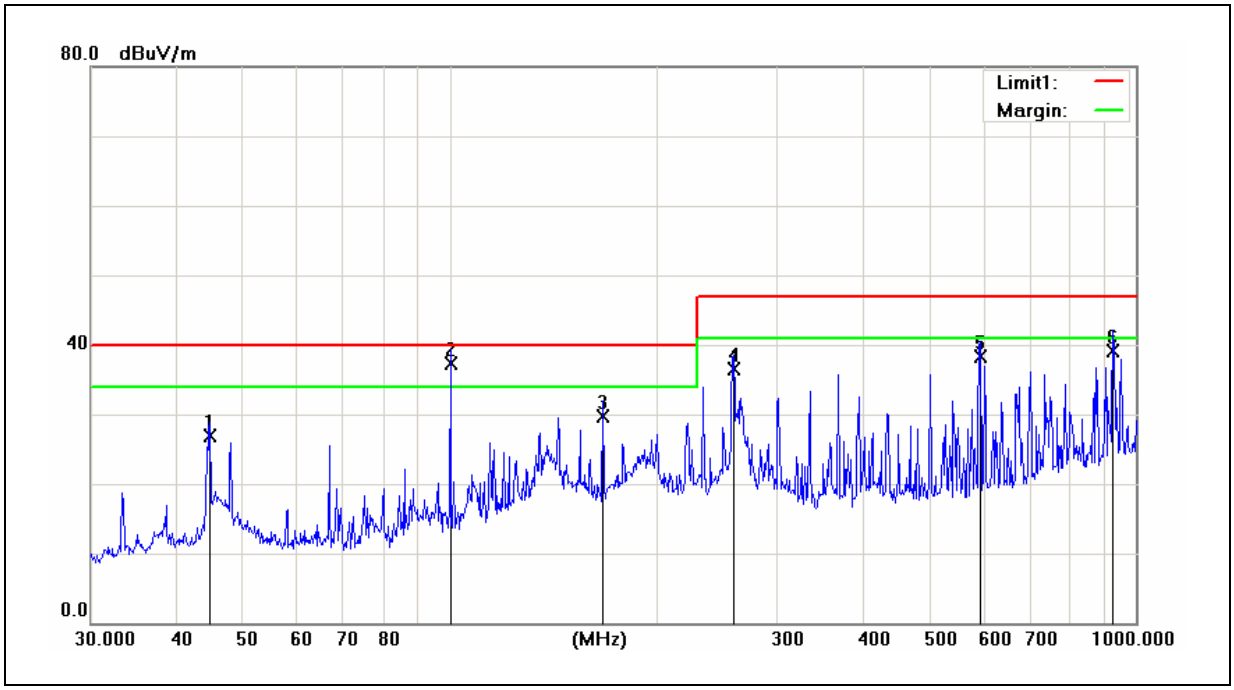

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	44.7433	41.82	-14.82	27.00	40.00	-13.00	400	160	QP
2	100.2286	54.98	-17.68	37.30	40.00	-2.70	400	133	QP
3	167.2368	43.18	-13.38	29.80	40.00	-10.20	400	259	QP
4	259.2338	49.82	-13.32	36.50	47.00	-10.50	300	117	QP
5	593.0497	44.47	-6.07	38.40	47.00	-8.60	200	15	QP
6	925.7563	39.41	-0.31	39.10	47.00	-7.90	100	52	QP

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

Standard:	EN 55022 Class A	Test Distance:	10m
Test item:	Radiated Emission	Power:	AC 230V/50Hz
Model Number:	I-7520A	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH
Mode:	Mode 1	Date:	2014/02/05
Ant.Polar.:	Vertical	Test By:	Frank Lin

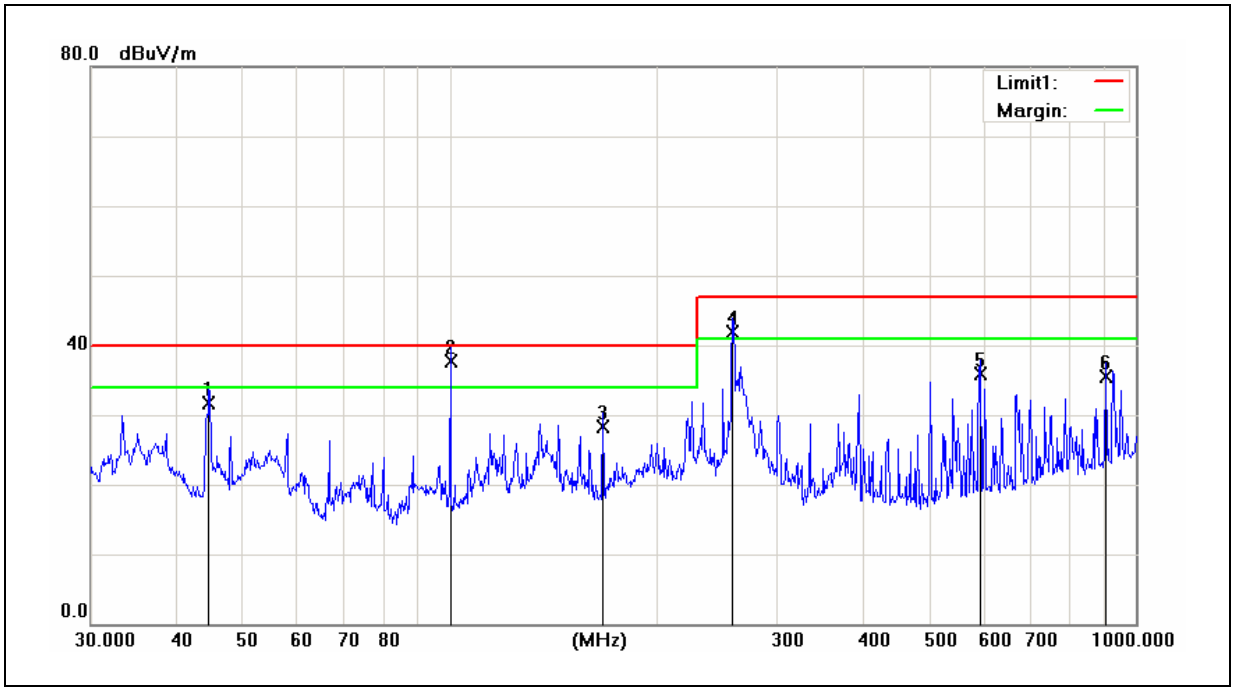

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	44.5868	46.17	-14.37	31.80	40.00	-8.20	100	355	QP
2	100.2286	54.92	-17.12	37.80	40.00	-2.20	200	245	QP
3	167.2368	40.99	-12.59	28.40	40.00	-11.60	100	150	QP
4	258.3264	54.45	-12.55	41.90	47.00	-5.10	100	328	QP
5	593.0497	40.67	-4.67	36.00	47.00	-11.00	300	80	QP
6	903.3094	34.40	1.10	35.50	47.00	-11.50	200	195	QP

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).
2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

Standard:	EN 55022 Class A	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 230V/50Hz
Model Number:	I-7520A	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH
Mode:	Mode 1 (1GHz~6GHz)	Date:	2014/02/05
Ant.Polar.:	Horizontal	Test By:	Frank Lin

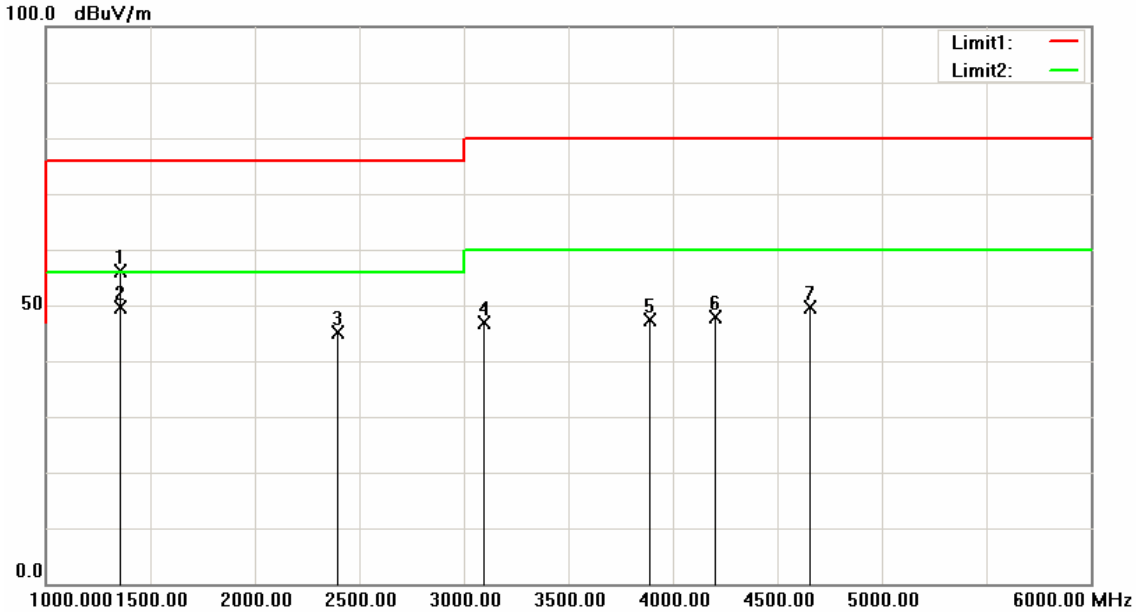

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1355.000	58.10	-1.90	56.20	76.00	-19.80	peak
2	1355.000	51.43	-1.90	49.53	56.00	-6.47	AVG
3	2395.000	40.81	4.27	45.08	76.00	-30.92	peak
4	3095.000	40.56	6.33	46.89	80.00	-33.11	peak
5	3890.000	38.47	8.93	47.40	80.00	-32.60	peak
6	4200.000	37.85	10.14	47.99	80.00	-32.01	peak
7	4655.000	37.86	11.67	49.53	80.00	-30.47	peak

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

Standard:	EN 55022 Class A	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 230V/50Hz
Model Number:	I-7520A	Temp.(℃)/Hum.(%RH):	26(℃)/60%RH
Mode:	Mode 1 (1GHz~6GHz)	Date:	2014/02/05
Ant.Polar.:	Vertical	Test By:	Frank Lin

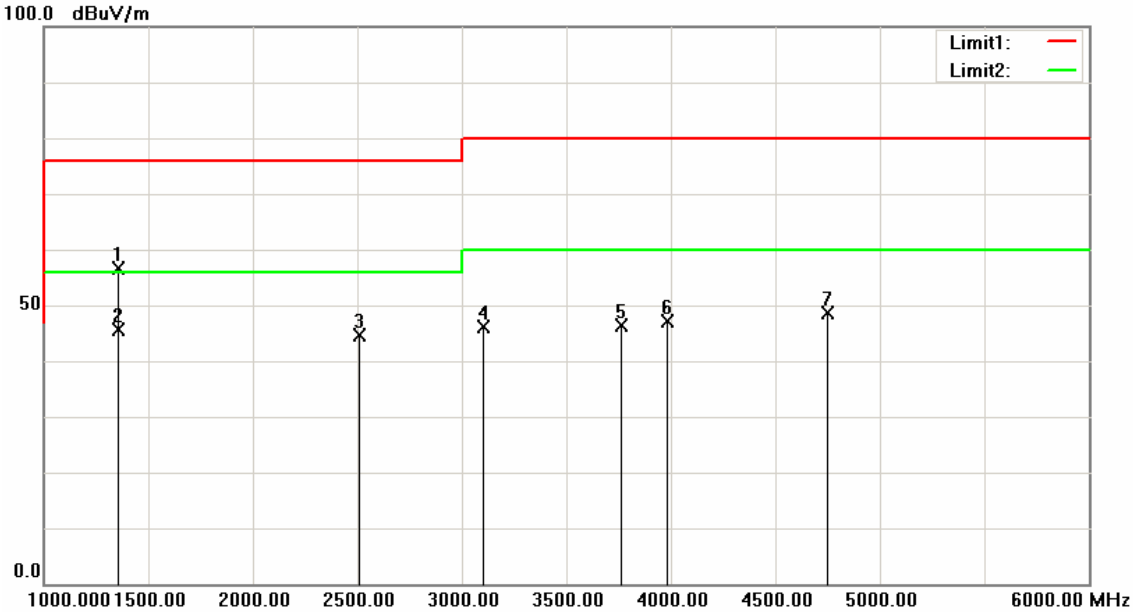

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1355.000	58.60	-1.90	56.70	76.00	-19.30	peak
2	1355.000	47.61	-1.90	45.71	56.00	-10.29	AVG
3	2510.000	39.48	5.04	44.52	76.00	-31.48	peak
4	3105.000	39.66	6.36	46.02	80.00	-33.98	peak
5	3765.000	37.89	8.40	46.29	80.00	-33.71	peak
6	3980.000	37.92	9.30	47.22	80.00	-32.78	peak
7	4750.000	36.70	11.92	48.62	80.00	-31.38	peak

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

4.2.6. Test Photograph

Test Mode: Mode 1

Description: Front View of Radiated Emission Test _ Below 1GHz

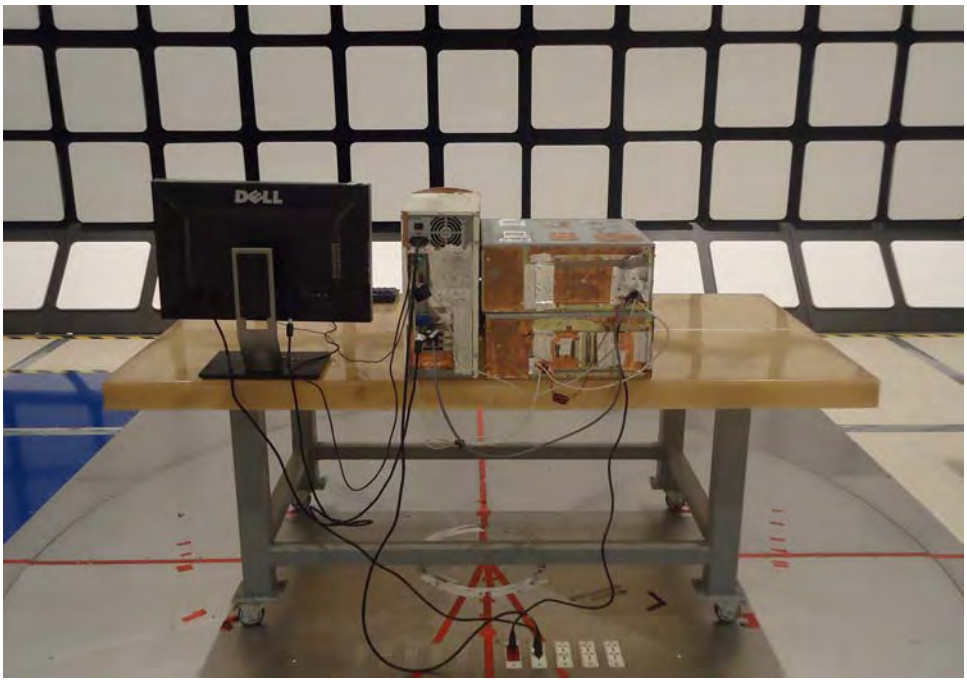

Test Mode: Mode 1

Description: Back View of Radiated Emission Test _ Below 1GHz

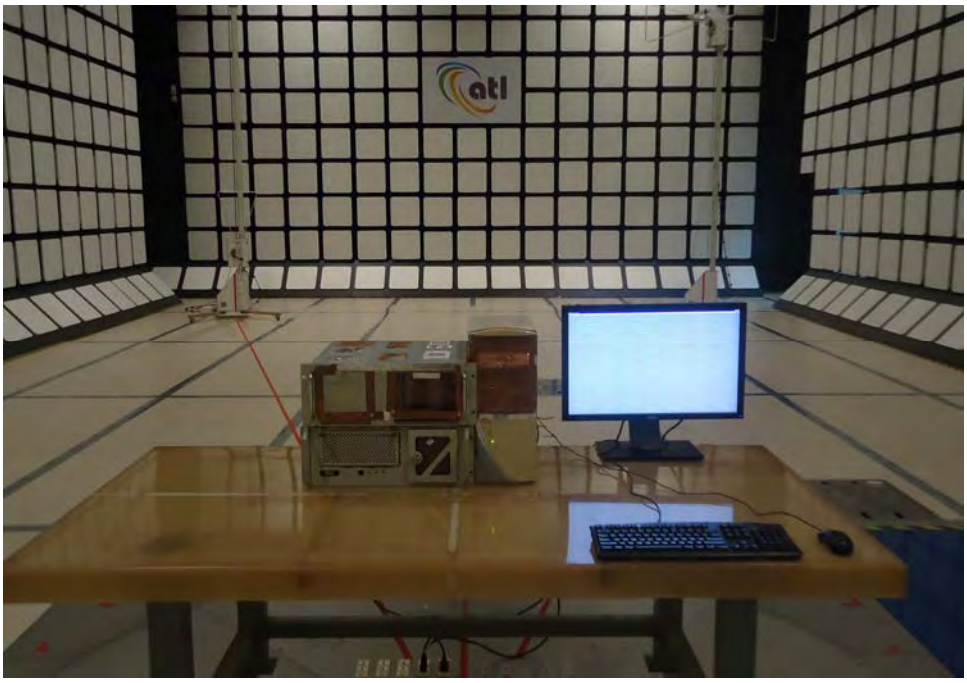

Test Mode: Mode 1

Description: Front View of Radiated Emission Test _ Above 1GHz

Test Mode: Mode 1

Description: Back View of Radiated Emission Test _ Above 1GHz

4.3. Harmonics Current Measurement

4.3.1. Limit

Limits of Class A Harmonics Currents

Harmonics Order n	Maximum Permissible harmonic current (A)	Harmonics Order n	Maximum Permissible harmonic current (A)
Odd harmonics		Even harmonics	
3	2.30	2	1.08
5	1.14	4	0.43
7	0.77	6	0.30
9	0.40	8 ≤ n ≤ 40	0.23 * 8/n
11	0.33		
13	0.21		
15 ≤ n ≤ 39	0.15 * 15/n		

Limits of Class B Harmonics Currents

For Class B equipment, the harmonic of the input current shall not exceed the maximum permissible values given in table which is the limit of Class A multiplied by a factor of 1.5.

Limits of Class C Harmonics Currents

Harmonics Order n	Maximum Permissible harmonic current Expressed as a percentage of the input current at the fundamental frequency (%)
2	2
3	30 · λ*
5	10
7	7
9	5
11 ≤ n ≤ 39 (odd harmonics only)	3
∗λ is the circuit power factor	

Limits of Class D Harmonics Currents

Harmonics Order n	Maximum Permissible harmonic current per watt (mA/W)	Maximum Permissible harmonic current (A)
3	3.4	2.30
5	1.9	1.14
7	1.0	0.77
9	0.5	0.40
11	0.35	0.33
11 ≤ n ≤ 39 (odd harmonics only)	3.85/n	See limit of Class A

4.3.2. Test Instrument

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Power Harmonics Analyzers	EMC-Partner AG	HAR1000-1P	171	02/07/2014	(2)
Test Site	ATL	TE05	TE05	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

4.3.3. Setup

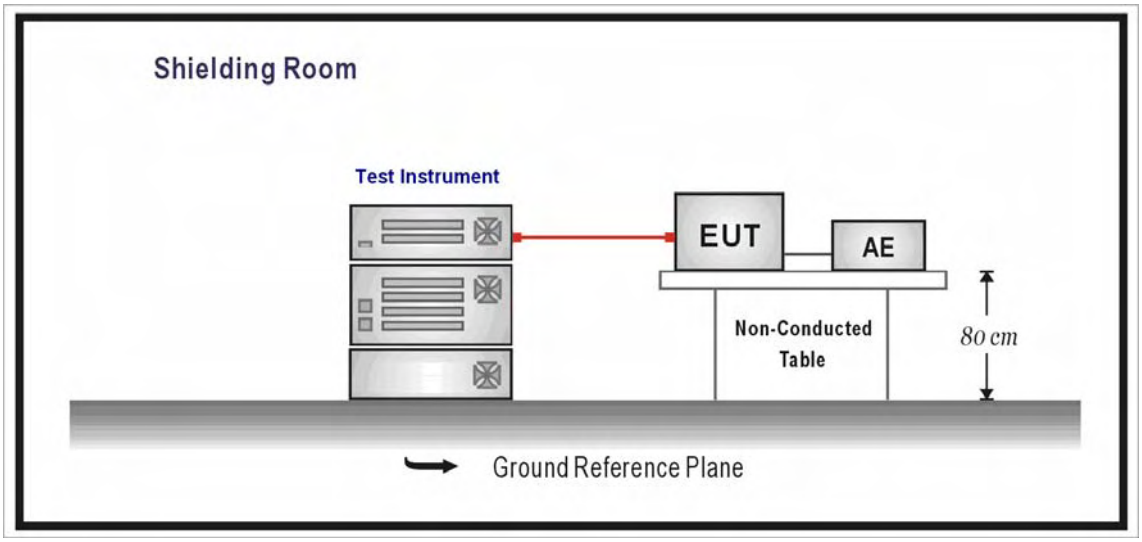

4.3.4. Test Procedure

The EUT was placed on the top of a wooden table 0.8 meters above the ground and the EUT is supplied in series with power analyzer from a power source having the same normal voltage and frequency as the rated supply voltage and the equipment under test. And the rated voltage at the supply voltage of EUT of 0.94 times and 1.06 times shall be performed.

A definition of the normal load or of the conditions for adequate heat discharge can usually be found in the EN publication corresponding to the equipment under test.

Equipment may have several separately controlled circuits. Each circuit is considered as a single piece of equipment if it can be operated independently and separately from the other circuits.

4.3.5. Test Result

Model Number	I-7520A		
Test Item	Power Harmonics		
Test Mode	Mode 1		
Date of Test	2014/02/07	Test Site	TE05

Test Result: Pass

Source qualification: Normal

Current & voltage waveforms

Harmonics and Class A limit line

European Limits

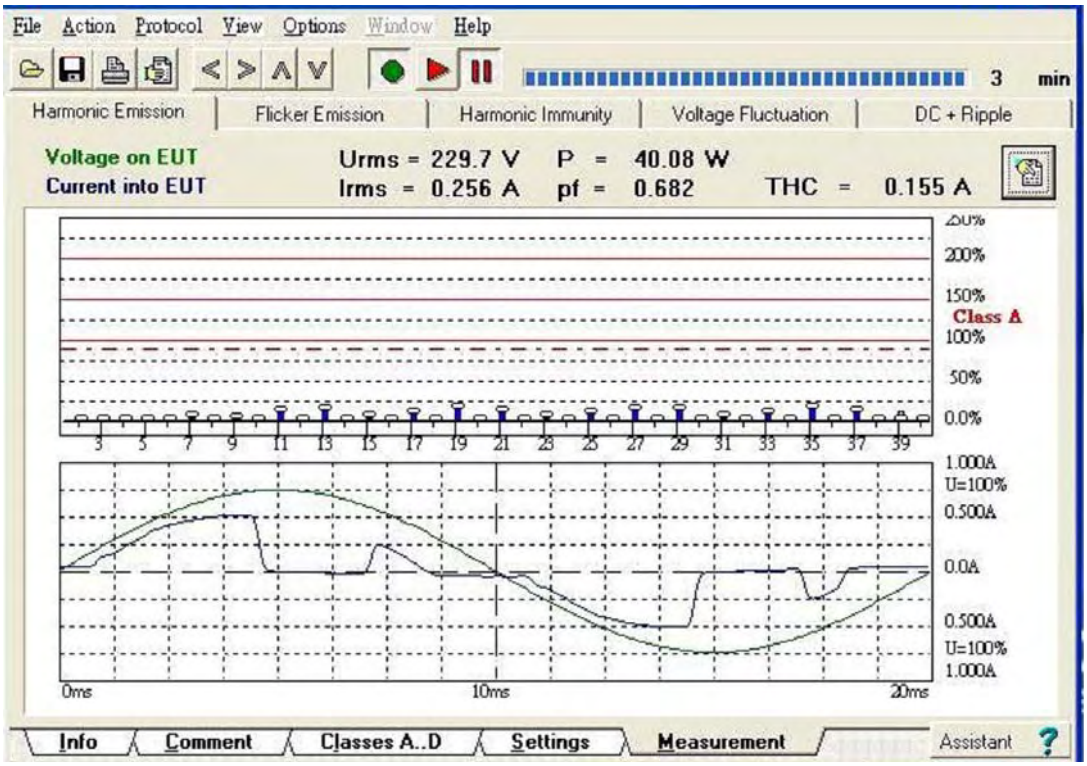

Note 1:

For the following categories of equipment limits are not specified in this edition of the standard.

-Equipment with a rated power of 75 W or less, other than lighting equipment.

-Professional equipment with a total rated power greater than 1 kW;

-Symmetrically controlled heating elements with a rated power less than or equal to 200 W;

-Independent dimmers for incandescent lamps with a rated power less than or equal to 1 kW.

Urms =	229.7V	Freq =	49.987	Range:	1 A
Irms =	0.256A	Ipk =	0.516A	cf =	2.015
P =	40.08W	S =	58.77VA	pf =	0.682
THDi =	61.0 %	THDu =	0.10 %	Class A	

Test - Time : 3min (100 %)

Test completed, Result: PASSED

Order	Freq. [Hz]	Iavg [A]	Iavg%L [%]	Imax [A]	Imax%L [%]	Limit [A]	Status
1	50	0.1988		0.2039			PASS
2	100	0.0000	0.0000	0.0003	0.0283	1.0800	PASS
3	150	0.1104	4.7987	0.1155	5.0235	2.3000	PASS
4	200	0.0000	0.0000	0.0022	0.5110	0.4300	PASS
5	250	0.0814	7.1367	0.0840	7.3671	1.1400	PASS
6	300	0.0000	0.0000	0.0026	0.8748	0.3000	PASS
7	350	0.0337	4.3804	0.0347	4.5103	0.7700	PASS
8	400	0.0000	0.0000	0.0017	0.7430	0.2300	PASS
9	450	0.0129	3.2295	0.0200	4.9896	0.4000	PASS
10	500	0.0000	0.0000	0.0028	1.5259	0.1840	PASS
11	550	0.0364	11.022	0.0384	11.634	0.3300	PASS
12	600	0.0000	0.0000	0.0032	2.1097	0.1533	PASS
13	650	0.0290	13.798	0.0303	14.445	0.2100	PASS
14	700	0.0000	0.0000	0.0018	1.3932	0.1314	PASS
15	750	0.0063	4.2315	0.0070	4.6794	0.1500	PASS
16	800	0.0000	0.0000	0.0015	1.3269	0.1150	PASS
17	850	0.0122	9.1865	0.0143	10.837	0.1324	PASS
18	900	0.0000	0.0000	0.0019	1.8510	0.1022	PASS
19	950	0.0186	15.698	0.0193	16.338	0.1184	PASS
20	1000	0.0000	0.0000	0.0012	1.2605	0.0920	PASS
21	1050	0.0127	11.836	0.0132	12.362	0.1071	PASS
22	1100	0.0000	0.0000	0.0008	0.9487	0.0836	PASS
23	1150	0.0053	5.3706	0.0078	7.9237	0.0978	PASS
24	1200	0.0000	0.0000	0.0006	0.7961	0.0767	PASS
25	1250	0.0079	8.7247	0.0096	10.715	0.0900	PASS
26	1300	0.0000	0.0000	0.0012	1.6387	0.0708	PASS
27	1350	0.0113	13.536	0.0119	14.282	0.0833	PASS
28	1400	0.0000	0.0000	0.0020	3.0650	0.0657	PASS
29	1450	0.0103	13.274	0.0112	14.396	0.0776	PASS
30	1500	0.0000	0.0000	0.0017	2.7864	0.0613	PASS
31	1550	0.0038	5.2442	0.0059	8.0729	0.0726	PASS
32	1600	0.0000	0.0000	0.0009	1.5922	0.0575	PASS
33	1650	0.0056	8.2362	0.0073	10.653	0.0682	PASS
34	1700	0.0000	0.0000	0.0018	3.3835	0.0541	PASS
35	1750	0.0092	14.332	0.0098	15.286	0.0643	PASS
36	1800	0.0000	0.0000	0.0020	3.9407	0.0511	PASS
37	1850	0.0076	12.527	0.0086	14.152	0.0608	PASS
38	1900	0.0000	0.0000	0.0008	1.6387	0.0484	PASS
39	1950	0.0000	0.0337	0.0052	9.0983	0.0577	PASS
40	2000	0.0000	0.0000	0.0008	1.7249	0.0460	PASS

1. Dynamic limits were applied for this test. The highest harmonics values in the above table may not occur at the same window as the maximum harmonics/limit ratio.
2. According to EN61000-3-2 paragraph 7 the note 1 and 2 are valid for all applications having an active input power >75W. Others the result should be pass.

4.3.6. Test Photograph

Test Mode:	Mode 1
Description:	Front View of Power Harmonics Test

4.4. Voltage Fluctuation and Flicker

4.4.1. Limit

The following limits apply:

-- the value of P_{st} shall not be greater than 1.0;

-- the value of P_{lt} shall not be greater than 0.65;

-- the value of d(t) during a voltage change shall not exceed 3.3 % for more than 500 ms;

-- the relative steady-state voltage change, d_c, shall not exceed 3.3 %;

-- the maximum relative voltage change, d_{max}, shall not exceed;

a) 4 % without additional conditions;

b) 6 % for equipment which is:

-- switched manually, or

-- switched automatically more frequently than twice per day, and also has either a delayed restart (the delay being not less than a few tens of seconds), or manual restart, after a power supply interruption.

Note: The cycling frequency will be further limited by the P_{st} and P_{1t} limit.

For example: a d_{max} of 6%producing a rectangular voltage change characteristic twice per hour will give a P_{1t} of about 0.65.

c) 7 % for equipment which is:

-- attended whilst in use (for example: hair dryers, vacuum cleaners, kitchen equipment such as mixers, garden equipment such as lawn mowers, portable tools such as electric drills), or

-- switched on automatically, or is intended to be switched on manually, no more than twice per day, and also has either a delayed restart (the delay being not less than a few tens of seconds) or manual restart, after a power supply interruption.

P_{st} and P_{1t} requirements shall not be applied to voltage changes caused by manual switching.

4.4.2. Test Instrument

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Power Harmonics Analyzers	EMC-Partner AG	HAR1000-1P	171	02/07/2014	(2)
Test Site	ATL	TE05	TE05	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

4.4.3. Setup

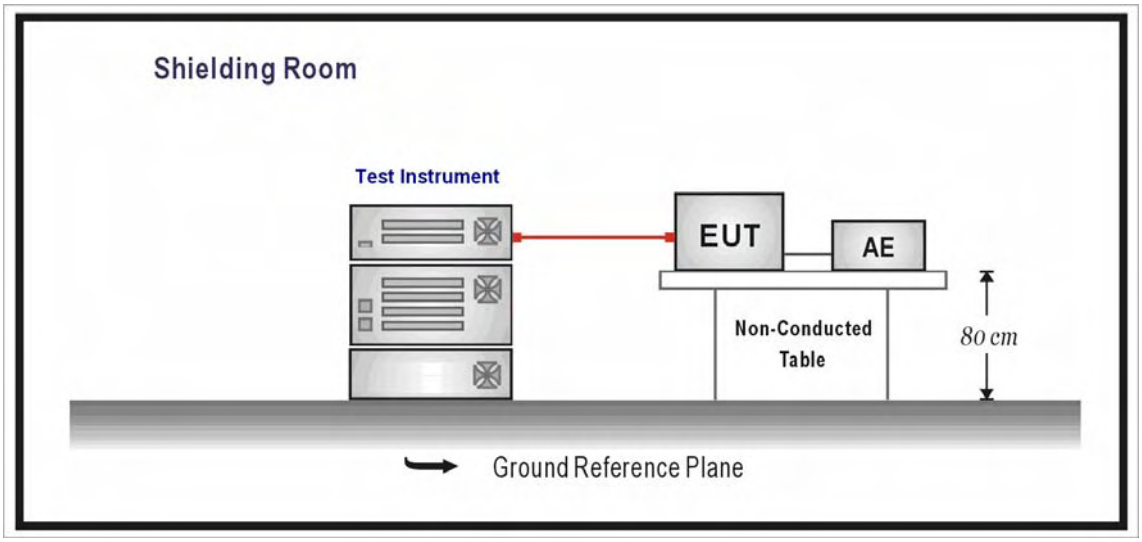

4.4.4. Test Procedure

The EUT is supplied in series with power analyzer from a power source having the same normal voltage and frequency as the rated supply voltage and the equipment under test. And the rated voltage at the supply voltage of EUT of 0.94 times and 1.06 times shall be performed.

The EUT was placed on the top of a wooden table 0.8 meters above the ground and operated to produce the most unfavorable sequence of voltage changes under normal operating conditions.

During the flick measurement, the measure time shall include that part of whole operation cycle in which the EUT produce the most unfavorable sequence of voltage changes. The observation period for short-term flicker indicator is 10 minutes and the observation period for long-term flicker indicator is 2 hours.

4.4.5. Test Result

Model Number	I-7520A		
Test Item	Flicker		
Test Mode	Mode 1		
Date of Test	2014/02/07	Test Site	TE05

Test Result: Pass Status: Test Completed

Plt and limit line

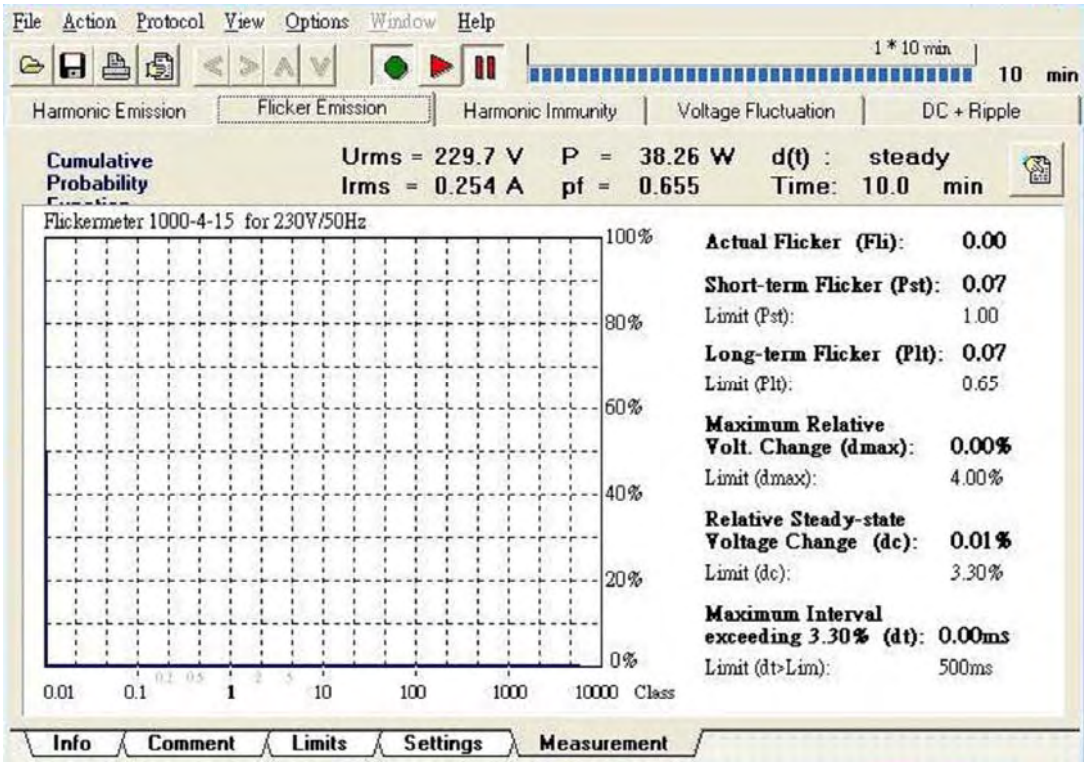

Urms =	229.7V	Freq =	49.987	Range:	1 A
Irms =	0.254A	Ipk =	0.531A	cf =	2.086
P =	38.26W	S =	58.44VA	pf =	0.655

Test - Time : 1 x 10min = 10min (100 %)

LIN (Line Impedance Network) : L: 0.24ohm +j0.15ohm N: 0.16ohm +j0.10ohm

Limits :	Plt :	0.65	Pst :	1.00
	dmax :	4.00 %	dc :	3.30 %
	dtLim:	3.30 %	dt>Lim:	500ms

Test completed, Result: PASSED

4.4.6. Test Photograph

Test Mode: Mode 1

Description: Front View of Flicker Test

5 Immunity Test

5.1. Electrostatic Discharge (ESD)

5.1.1. Test Specification

EN 61000-4-2			
Environmental Phenomena	Units	Test Specification	Performance Criterion
Enclosure Port			
Electrostatic Discharge	kV (Charge Voltage)	±8 Air Discharge ±4 Contact Discharge	B

5.1.2. Test Instrument

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Discharge Gun	Noiseken	ESS-2002	ESS05Y4736	03/14/2013	(1)
0.8m Height Wooden Table	N/A	N/A	N/A	N.C.R.	-----
Test Site	ATL	TE04	TE04	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

5.1.3. Setup

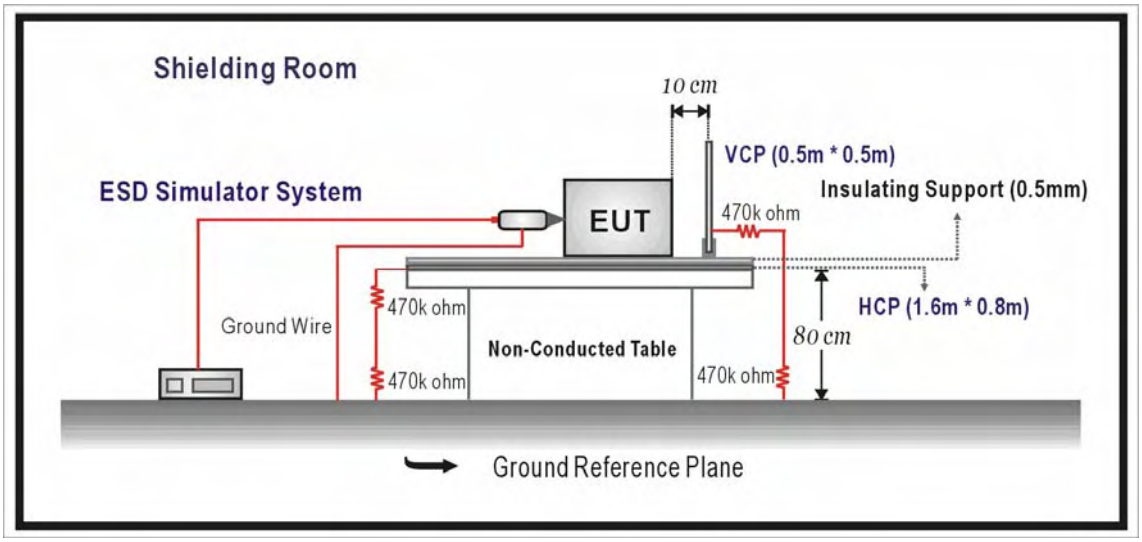

5.1.4. Test Procedure

The discharges shall be applied in two ways:

a) Contact discharges to the conductive surfaces and coupling planes:
The EUT shall be exposed to at least 200 discharges, 100 each at negative and positive polarity, at a minimum of four test points. One of the test points shall be subjected to at least 50 indirect discharges to the center of the front edge of the Horizontal Coupling Plane (HCP). The remaining three test points shall each receive at least 50 direct contact discharges. If no direct contact test point be available, then at least 200 indirect discharges shall be applied in the indirect mode. Test shall be performed at a maximum repetition rate of one discharge per second.

b) Air discharges at slots and apertures and insulating surfaces:
On those parts of the EUT where it is not possible to perform contact discharge testing, the equipment should be investigated to identify user accessible points where breakdown may occur. Such points are tested using the air discharge method. This investigation should be restricted to those area normally handled by the user. A minimum of 10 single air discharges shall be applied to the selected test point for each such area.

The basic test procedure was in accordance with IEC 61000-4-2:

a) The EUT was located 0.1 m minimum from all side of the HCP (dimensions 1.6m x 0.8m).

b) The support units were located another table 30 cm away from the EUT, but direct support unit was/were located at same location as EUT on the HCP and keep at a distance of 10 cm with EUT.

c) The time interval between two successive single discharges was at least 1 second.

d) Contact discharges were applied to the non-insulating coating, with the pointed tip of the generator penetrating the coating and contacting the conducting substrate.

e) Air discharges were applied with the round discharge tip of the discharge electrode approaching the EUT as fast as possible (without causing mechanical damage) to touch the EUT. After each discharge, the ESD generator was removed from the EUT and re-triggered for a new single discharge. The test was repeated until all discharges were complete.

f) At least ten single discharges (in the most sensitive polarity) were applied at the front edge of each HCP opposite the center point of each unit of the EUT and 0.1 meters from the front of the EUT. The long axis of the discharge electrode was in the plane of the HCP and perpendicular to its front edge during the discharge.

g) At least ten single discharges (in the most sensitive polarity) were applied to the center of one vertical edge of the Vertical Coupling Plane (VCP) in sufficiently different positions that the four faces of the EUT were completely illuminated. The VCP (dimensions 0.5m x 0.5m) was placed vertically to and 0.1 meters from the EUT.

5.1.5. Test Result

Model Number	I-7520A		
Test Item	Electrostatic Discharge		
Test Mode	Mode 1		
Date of Test	2014/02/07	Test Site	TE04

Air Discharge												
Test Points	Test Levels								Results			
	± 2 kV	Performance Criterion		± 4 kV	Performance Criterion		± 8 kV	Performance Criterion		Pass	Fail	Observation
Front	☐	☐A	☐B	☐	☐A	☐B	☐	☐A	☐B	☐	☐	---
Back	☐	☐A	☐B	☐	☐A	☐B	☐	☐A	☐B	☐	☐	---
Left	☐	☐A	☐B	☐	☐A	☐B	☐	☐A	☐B	☐	☐	---
Right	☐	☐A	☐B	☐	☐A	☐B	☐	☐A	☐B	☐	☐	---
Top	☒	☒A	☐B	☒	☒A	☐B	☒	☐A	☒B	☒	☐	Note2
Bottom	☐	☐A	☐B	☐	☐A	☐B	☐	☐A	☐B	☐	☐	---

Contact Discharge												
Test Points	Test Levels								Results			
	± 2 kV	Performance Criterion		± 4 kV	Performance Criterion		± 8 kV	Performance Criterion		Pass	Fail	Observation
Front	☒	☒A	☐B	☒	☒A	☐B	☐	☐A	☐B	☒	☐	Note1
Back	☒	☒A	☐B	☒	☒A	☐B	☐	☐A	☐B	☒	☐	Note1
Left	☒	☒A	☐B	☒	☒A	☐B	☐	☐A	☐B	☒	☐	Note1
Right	☒	☒A	☐B	☒	☒A	☐B	☐	☐A	☐B	☒	☐	Note1
Top	☒	☒A	☐B	☒	☒A	☐B	☐	☐A	☐B	☒	☐	Note1
Bottom	☒	☒A	☐B	☒	☒A	☐B	☐	☐A	☐B	☒	☐	Note1

For the tested points to EUT, please refer to attached page.
(Blue arrow mark for Air Discharge and red arrow mark for Contact Discharge)

Discharge To Horizontal Coupling Plane									
Side of EUT	Test Levels				Results				
	± 2 kV	± 4 kV	± 6 kV	± 8 kV	Pass	Fail	Performance Criterion		Observation
Front	☒	☒	☒	☐	☒	☐	☒A	☐B	Note1
Back	☒	☒	☒	☐	☒	☐	☒A	☐B	Note1
Left	☒	☒	☒	☐	☒	☐	☒A	☐B	Note1
Right	☒	☒	☒	☐	☒	☐	☒A	☐B	Note1

Discharge To Vertical Coupling Plane									
Side of EUT	Test Levels				Results				
	± 2 kV	± 4 kV	± 6 kV	± 8 kV	Pass	Fail	Performance Criterion		Observation
Front	☒	☒	☒	☐	☒	☐	☒A	☐B	Note1
Back	☒	☒	☒	☐	☒	☐	☒A	☐B	Note1
Left	☒	☒	☒	☐	☒	☐	☒A	☐B	Note1
Right	☒	☒	☒	☐	☒	☐	☒A	☐B	Note1

Note1 : Criterion A : There was no change compared with initial operation during the test.
Note2 : Criterion B : Air Discharge 8 kV, the monitor affected and can be self recover.

5.1.6. Test Photograph

Test Mode: Mode 1

Description: Front View of ESD Test

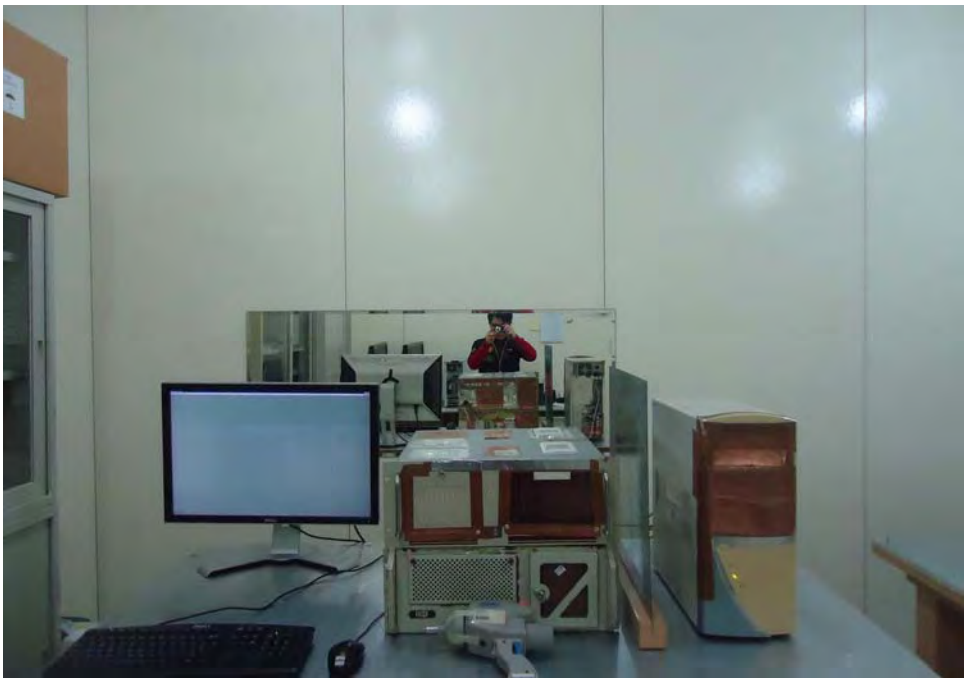

Test Mode: Mode 1

Description: Close View of ESD Test

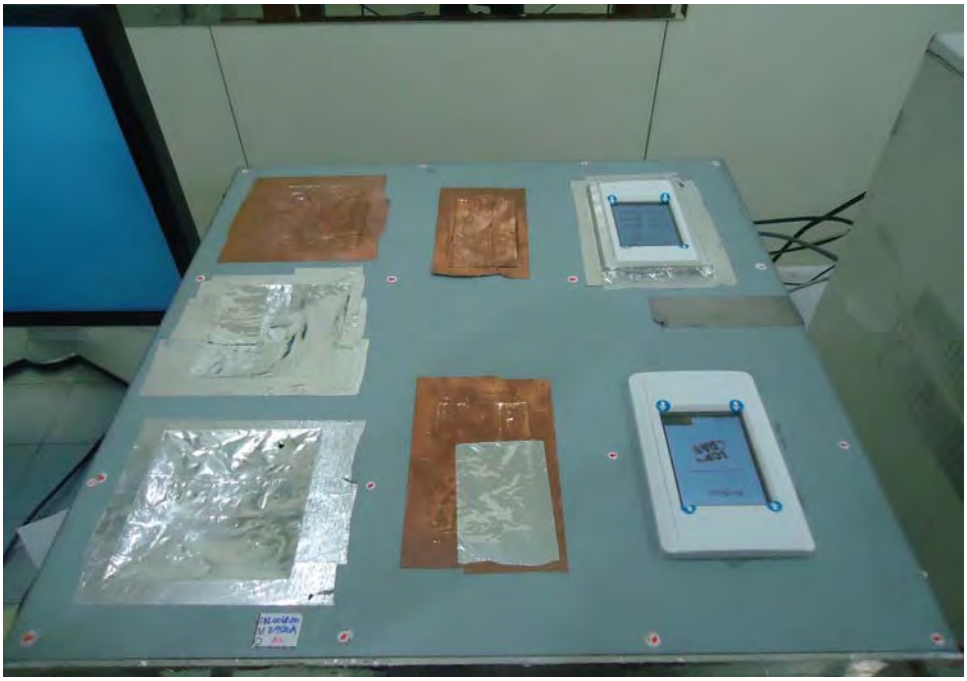

Test Mode: Mode 1

Description: Close View of ESD Test

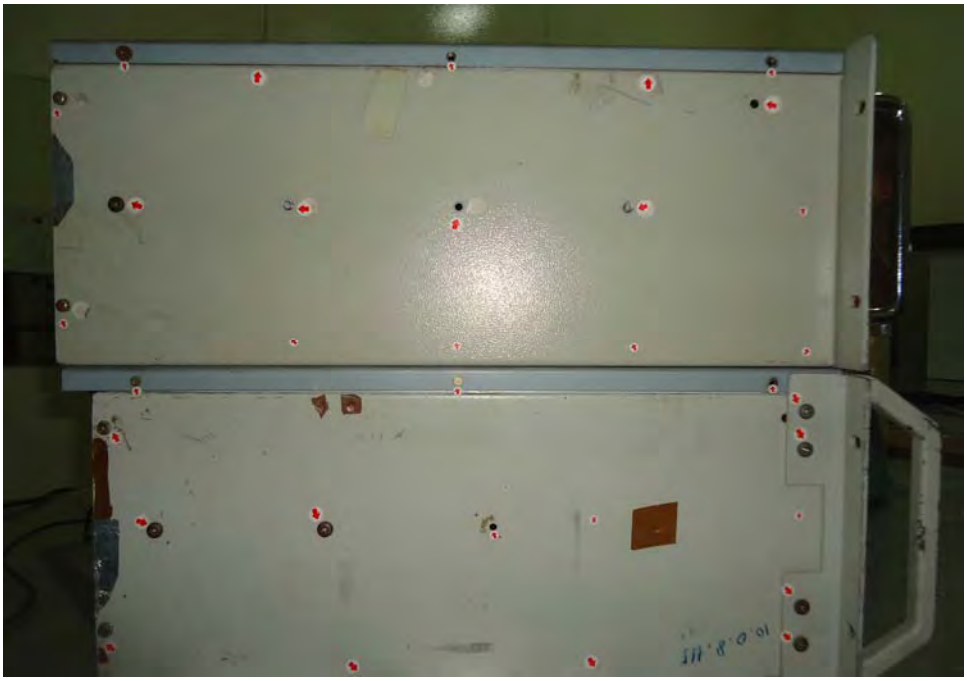

Test Mode: Mode 1

Description: Close View of ESD Test

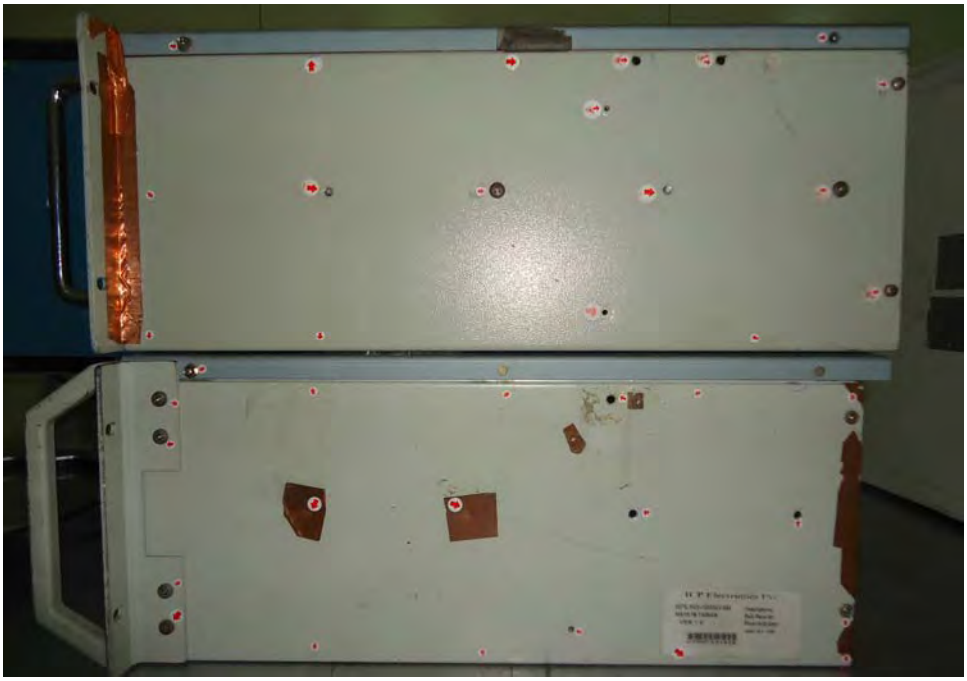

Test Mode: Mode 1

Description: Close View of ESD Test

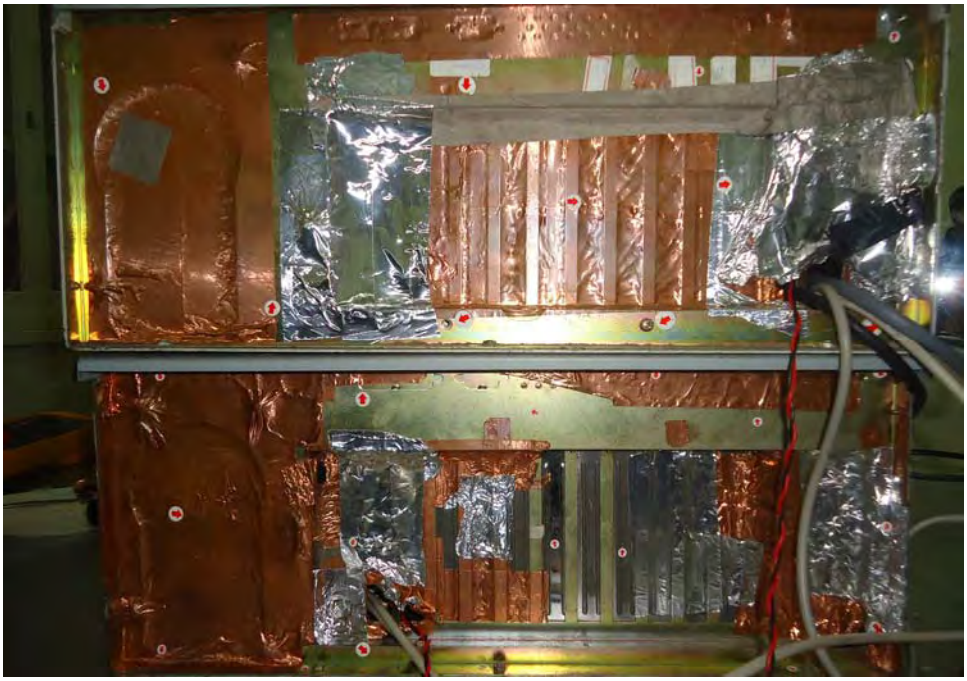

Test Mode: Mode 1

Description: Close View of ESD Test

Test Mode: Mode 1

Description: Close View of ESD Test

Test Mode: Mode 1

Description: Close View of ESD Test

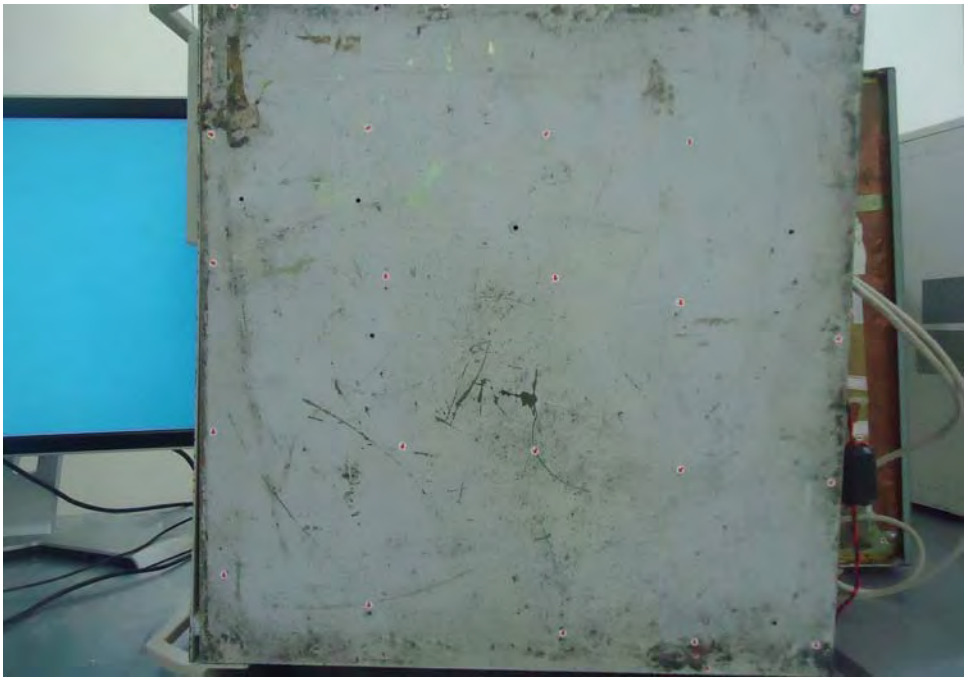

5.2. Radiated Electromagnetic Field (RS)

5.2.1. Test Specification

EN 61000-4-3			
Environmental Phenomena	Units	Test Specification	Performance Criterion
Enclosure Port			
Test Frequency Range	MHz	80-1000	A
RF Electromagnetic Field	V/m(Un-modulated, rms)	3	
Amplitude Modulated	% AM (1kHz)	80	

EUT tested in accordance with the specifications given by the standard of EN 61000-4-3.

Step : 1%

Step time : 3 Second

5.2.2. Test Instrument

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
SMB 100A SIGNAL GENERATOR	R&S	SMB100A	100724	03/06/2013	(2)
NRP-Z91 POWER SENSOR	R&S	NRP-Z91	100611	07/15/2013	(1)
NRP-Z91 POWER SENSOR	R&S	NRP-Z91	100612	07/15/2013	(1)
NRP POWER METER	R&S	NRP	101591	07/15/2013	(1)
Solid State Power Amplifier	BONN ELEKTRONIK	BLWA 0830-160/100/40D	87050	N.C.R.	-----
Signal Generator Module	R&S	SM300 Module	102209	N.C.R.	-----
Broad-Band Horn Antenna	Schwarzbeck Mess-Elektronik	BBHA 9120	BBHA 9120 E388	N.C.R.	-----
Test Site	ATL	TE07	888009	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

5.2.3. Setup

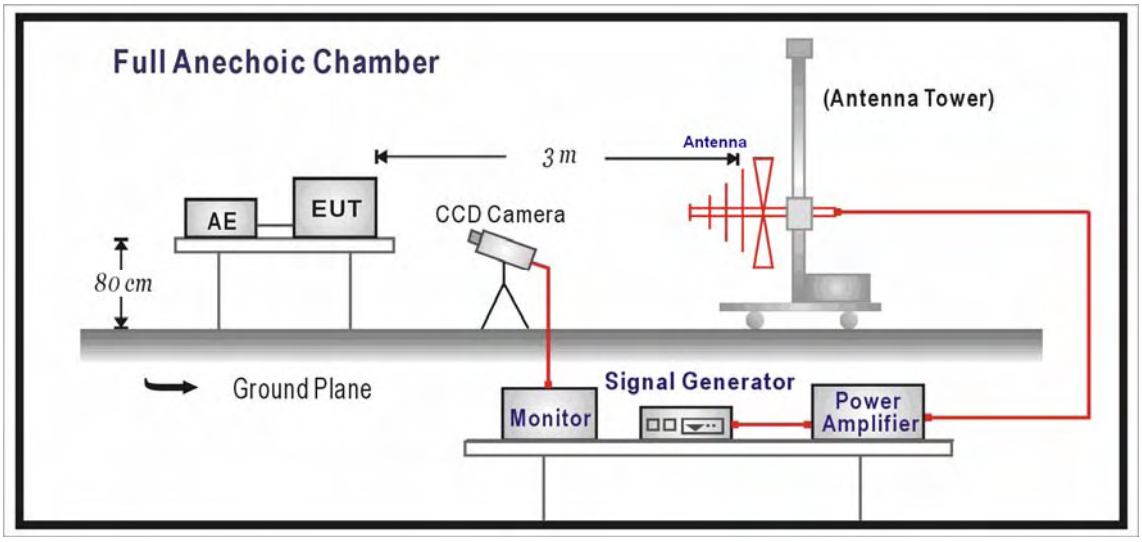

5.2.4. Test Procedure

The test procedure was in accordance with EN 61000-4-3

a) The testing was performed in a fully anechoic chamber. The transmit antenna was located at a distance of 3 meters from the EUT.

b) The frequency range is swept from 80 MHz to 1000 MHz, with the signal 80% amplitude modulated with a 1kHz sine-wave. The rate of sweep did not exceed 1.5 x 10 -3 decade/s, where the frequency range is swept incrementally, the step size was 1% of preceding frequency value.

c) The dwell time at each frequency shall be not less than the time necessary for the EUT to be able to respond.

d) The test was performed with the EUT exposed to both vertically and horizontally polarized fields on each of the four sides.

5.2.5. Test Result

Model Number	I-7520A				
Test Item	Radiated Susceptibility				
Test Mode	Mode 1				
Date of Test	2014/02/10			Test Site	TE07
Frequency (MHz)	Polarity	Azimuth	Field Strength (V/m)	Performance Criterion	Result
80 ~ 1000	H	0	3	☒A ☐B	PASS
80 ~ 1000	V	0	3	☒A ☐B	PASS
80 ~ 1000	H	90	3	☒A ☐B	PASS
80 ~ 1000	V	90	3	☒A ☐B	PASS
80 ~ 1000	H	180	3	☒A ☐B	PASS
80 ~ 1000	V	180	3	☒A ☐B	PASS
80 ~ 1000	H	270	3	☒A ☐B	PASS
80 ~ 1000	V	270	3	☒A ☐B	PASS

Note: The testing performed is from lowest level up to the highest level as required by standard, but only highest level is shown on the report.

Criterion A: Operate as intended during and after the test
Criterion B: Operate as intended after the test
Criterion C: Loss/Error of function

☐ Additional Information
☐ There was no observable degradation in performance.
☐ EUT stopped operation and could / could not be reset by operator at _____ V/m at frequency _____MHz.
☒ No false alarms or other malfunctions were observed during or after the test.

5.2.6. Test Photograph

Test Mode: Mode 1

Description: Front View of RS Test

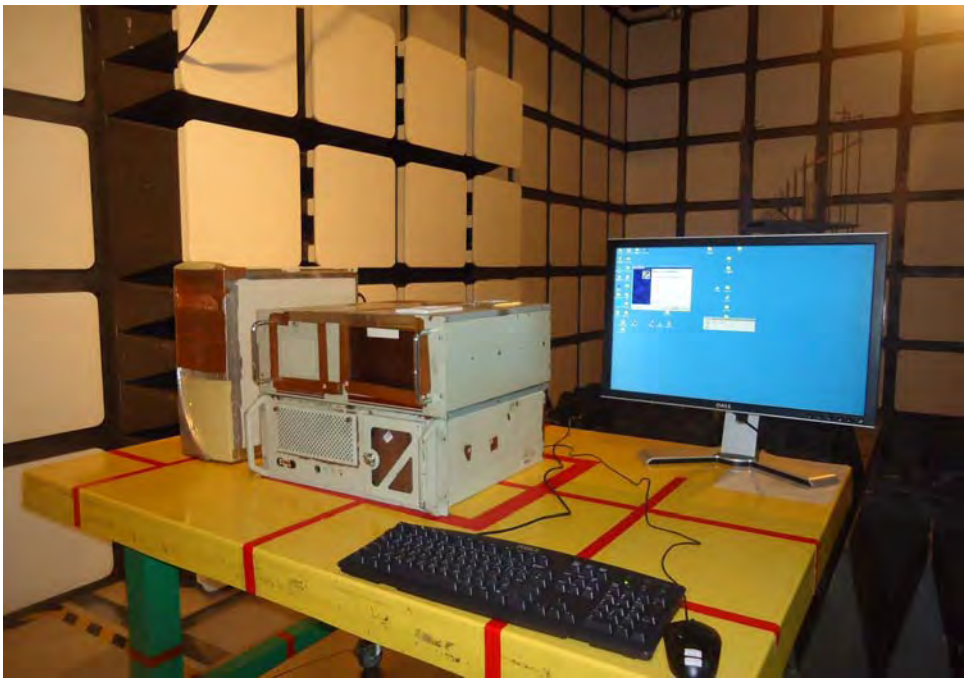

5.3. Electrical Fast Transient/Burst (EFT)

5.3.1. Test Specification

EN 61000-4-4				
Item	Environmental Phenomena	Units	Test Specification	Performance Criterion
I/O and communication ports				
	Fast Transients Common Mode	kV (Peak) Tr/Th ns Rep. Frequency kHz	±0.5 5/50 5	B
Input DC Power Ports				
	Fast Transients Common Mode	kV (Peak) Tr/Th ns Rep. Frequency kHz	±0.5 5/50 5	B
Input AC Power Ports				
	Fast Transients Common Mode	kV (Peak) Tr/Th ns Rep. Frequency kHz	±1 5/50 5	B

5.3.2. Test Instrument

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
EMC Immunity Tester	EMC-PARTNER AG	TRANSIENT 2000IN6	952	02/06/2014	(1)
Test Site	ATL	TE08	TE08	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

5.3.3. Setup

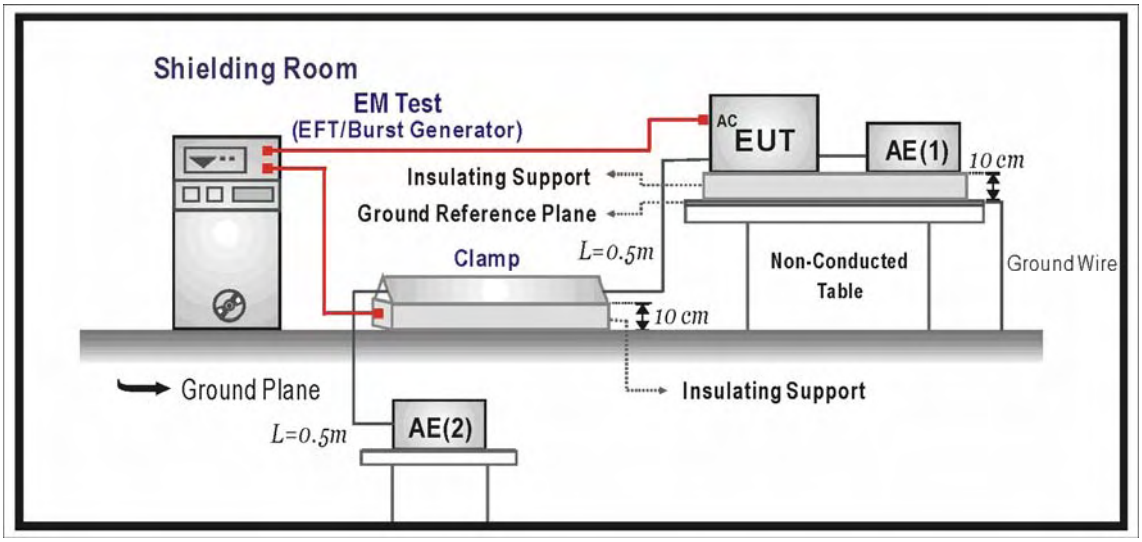

5.3.4. Test Procedure

a) Both positive and negative polarity discharges were applied.
b) The length of the "hot wire" from the coaxial output of the EFT generator to the terminals on the EUT should not exceed 1 meter.
c) The duration time of each test sequential was 1 minute.
d) The transient/burst waveform was in accordance with EN 61000-4-4, 5/50ns.

5.3.5. Test Result

Model Number	I-7520A					
Test Item	Electrical Fast Transient/Burst					
Test Mode	Mode 1					
Date of Test	2014/02/05			Test Site	TE08	
Test Point	Polarity	Test Level (kV)	Inject Time (Second)	Inject Method	Performance Criterion	Result
L	±	1	60	Direct	☒A ☐B	PASS
N	±	1	60	Direct	☒A ☐B	PASS
PE	±	1	60	Direct	☒A ☐B	PASS
L+N	±	1	60	Direct	☒A ☐B	PASS
L+PE	±	1	60	Direct	☒A ☐B	PASS
N+PE	±	1	60	Direct	☒A ☐B	PASS
L+N+PE	±	1	60	Direct	☒A ☐B	PASS
LAN Port	±	0.5	60	Direct	☒A ☐B	PASS

Note: The testing performed is from lowest level up to the highest level as required by standard, but only highest level is shown on the report.

Criterion A : Operate as intended during and after the test

Criterion B : Operate as intended after the test

Criterion C : Loss/Error of function

☐ Additional Information

☐ EUT stopped operation and could be reset by itself at_____ kV of Line.

☒ No false alarms or other malfunctions were observed during or after the test.

5.3.6. Test Photograph

Test Mode:	Mode 1
Description:	Front View of EFT Test – AC Mains Port, LAN Port

5.4. Surge

5.4.1. Test Specification

EN 61000-4-5				
Item	Environmental Phenomena	Units	Test Specification	Performance Criterion
Signal Ports and Telecommunication Ports(See 1) and 2))				
	Surges Line to Ground	Tr/Th us kV	1.2/50 (8/20) ± 1	B
Input DC Power Ports				
	Surges Line to Ground	Tr/Th us kV	1.2/50 (8/20) ± 0.5	B
Input AC Power Ports				
	Surges Line to Line Line to Ground	Tr/Th us kV kV	1.2/50 (8/20) ± 1 ± 2	B

5.4.2. Test Instrument

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
EMC Immunity Tester	EMC-PARTNER AG	TRANSIENT 2000IN6	952	02/06/2014	(1)
Test Site	ATL	TE08	TE08	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

5.4.3. Setup

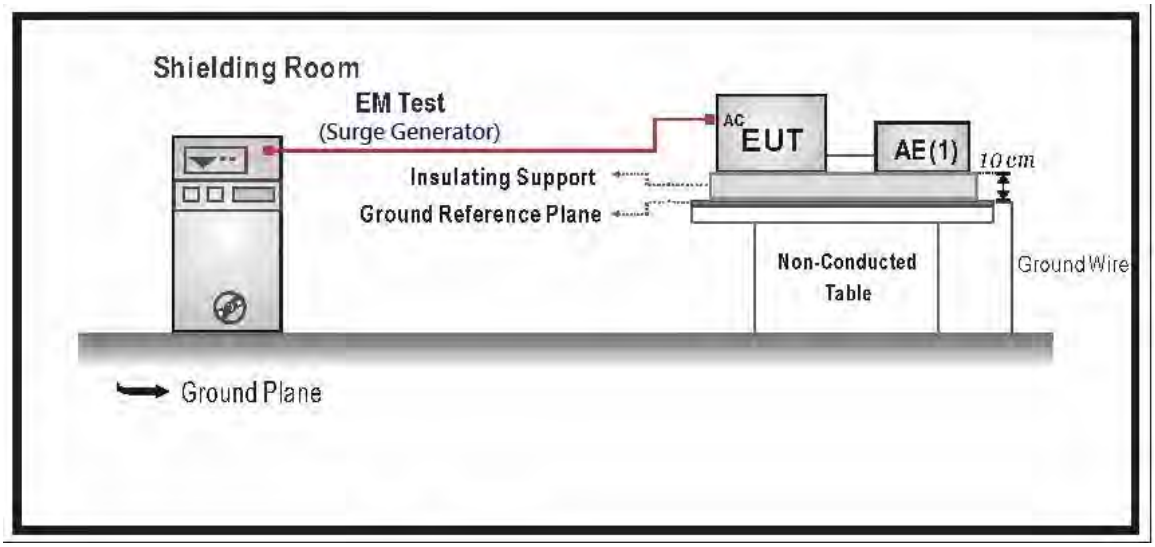

5.4.4. Test Procedure

a) For EUT power supply:

The surge is applied to the EUT power supply terminals via the capacitive coupling network. Decoupling networks are required in order to avoid possible adverse effects on equipment not under test that may be powered by the same lines, and to provide sufficient decoupling impedance to the surge wave. The power cord between the EUT and the coupling/decoupling networks was shorter than 2 meters in length.

b) For test applied to unshielded un-symmetrically operated interconnection lines of EUT:
The surge was applied to the lines via the capacitive coupling. The coupling / decoupling networks didn't influence the specified functional conditions of the EUT. The interconnection line between the EUT and the coupling/decoupling networks was shorter than 2 meters in length.

c) For test applied to unshielded symmetrically operated interconnection / telecommunication lines of EUT:
The surge was applied to the lines via gas arrestors coupling. Test levels below the ignition point of the coupling arrestor were not specified. The interconnection line between the EUT and the coupling/decoupling networks was shorter than 2 meters in length.

5.4.5. Test Result

Model Number		I-7520A				
Test Item		Surge				
Test Mode		Mode 1				
Angle		0, 90, 180, 270				
Date of Test		2014/02/06		Test Site	TE08	
Inject Line	Polarity	Voltage kV	Time Interval (Second)	Inject Method	Performance Criterion	Result
L+N	±	1	60	Direct	☒A ☐B	Pass
L+PE	±	2	60	Direct	☒A ☐B	Pass
N+PE	±	2	60	Direct	☒A ☐B	Pass
L+N+PE	±	2	60	Direct	☒A ☐B	Pass

Note: The testing performed is from lowest level up to the highest level as required by standard, but only highest level is shown on the report.

Criterion A : Operate as intended during and after the test

Criterion B : Operate as intended after the test

Criterion C : Loss/Error of function

☐ Additional Information

☐ EUT stopped operation and could / could not be reset by operator at_____kV of Line_____.

☒ No false alarms or other malfunctions were observed during or after the test.

5.4.6. Test Photograph

Test Mode:	Mode 1
Description:	Front View of Surge Test – AC Mains Port

5.5. Conducted Susceptibility (CS)

5.5.1. Test Specification

EN 61000-4-6			
Environmental Phenomena	Units	Test Specification	Performance Criterion
Signal Ports and Telecommunication Ports			
Radio-Frequency Continuous Conducted	MHz	0.15-80	A
	V (rms, Un-modulated)	3	
	% AM (1kHz)	80	
Input DC Power Ports			
Radio-Frequency Continuous Conducted	MHz	0.15-80	A
	V (rms, Un-modulated)	3	
	% AM (1kHz)	80	
Input AC Power Ports			
Radio-Frequency Continuous Conducted	MHz	0.15-80	A
	V (rms, Un-modulated)	3	
	% AM (1kHz)	80	

EUT tested in accordance with the specifications given by the standard of EN 61000-4-6.

Step : 1%
Step time : 3 Second

5.5.2. Test Instrument

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Signal Line Coupling Decoupling Network	FCC	FCC-801--T2-RJ11	8017	07/15/2013	(1)
Signal Line Coupling Decoupling Network	FCC	FCC-801--T4-RJ45	8018	07/15/2013	(1)
Signal Line Coupling Decoupling Network	FCC	FCC-801-M2/M3-16A 8030	8030	07/15/2013	(1)
EM Injection Clamp	FCC	F-203I-23MM	8576	07/15/2013	(1)
NRP-Z91 POWER SENSOR	R&S	NRP-Z91	100613	07/15/2013	(1)
Amplifiers	ar	75A250A	328729	N.C.R.	-----
De-coupling Network	FCC	F-203I-23MM-DCN	8234	N.C.R.	-----
Test Site	ATL	TE08	TE08	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.
NOTE: N.C.R. = No Calibration Request.

5.5.3. Setup

CDN Method

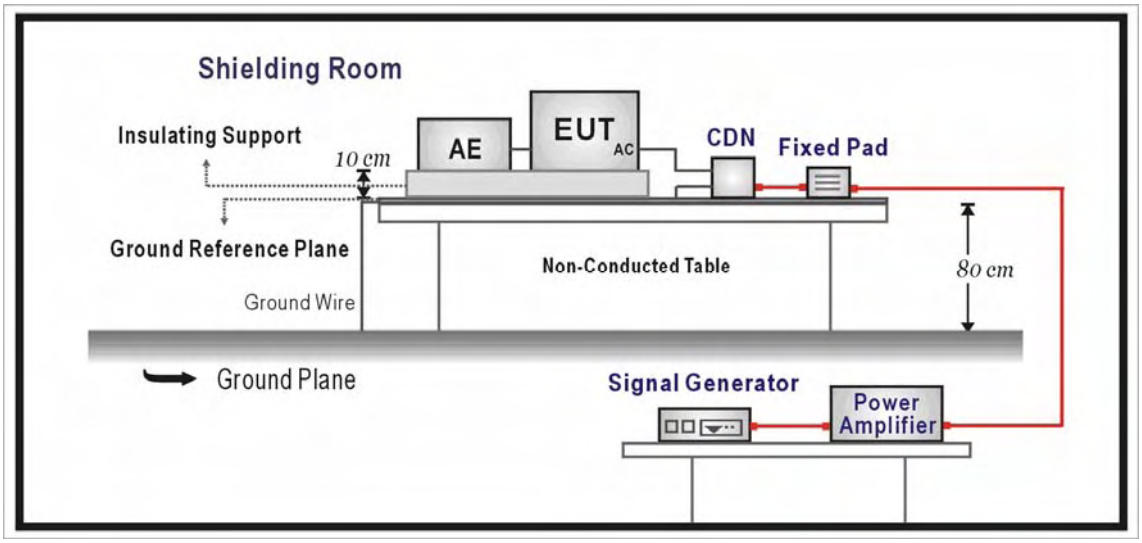

EM Clamp Method

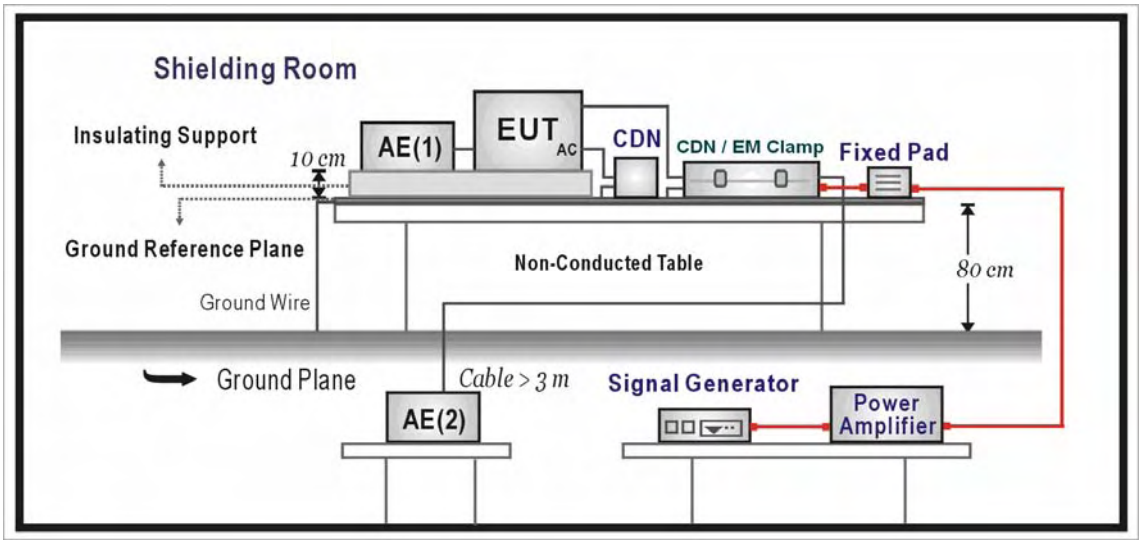

5.5.4. Test Procedure

The EUT shall be tested within its intended operating and climatic conditions.
The test shell performed with the test generator connected to each of the coupling and decoupling devices in turn, while the other non-excited RF input ports of the coupling devices are terminated by a 50-ohm load resistor.
The frequency range was swept from 150 kHz to 80 MHz, using the signal level established during the setting process and with a disturbance signal of 80 % amplitude. The signal was modulated with a 1 kHz sine wave, pausing to adjust the RF signal level or the switch coupling devices as necessary. The sweep rate was 1.5 x 10^{-3} decades/s. Where the frequency range is swept incrementally, the step size was 1 % of preceding frequency value from 150 kHz to 80 MHz.
The dwell time at each frequency was less than the time necessary for the EUT to be exercised, and able to respond. Sensitive frequencies such as clock frequency and harmonics or frequencies of dominant interest, was analyzed separately.
Attempts was made to fully exercise the EUT during testing, and to fully interrogate all exercise modes selected for susceptibility.

5.5.5. Test Result

Model Number	I-7520A				
Test Item	Conducted Susceptibility				
Test Mode	Mode 1				
Date of Test	2014/02/06		Test Site	TE08	
Frequency Band (MHz)	Field Strength (Vrms)	Inject Port	Inject Method	Performance Criterion	Result
0.15 ~ 80	3	AC Mains	CDN-M3	☒A ☐B	PASS
0.15 ~ 80	3	LAN Port	CDN-T4	☒A ☐B	PASS

Note: The testing performed is from lowest level up to the highest level as required by standard, but only highest level is shown on the report.

Criterion A : Operate as intended during and after the test
Criterion B : Operate as intended after the test
Criterion C : Loss/Error of function

☐ Additional Information
☐ EUT stopped operation and could / could not be reset by operator at_____kV of Line_____.
☒ No false alarms or other malfunctions were observed during or after the test.

5.5.6. Test Photograph

Test Mode:	Mode 1
Description:	Front View of CS Test – AC Mains Port, LAN Port

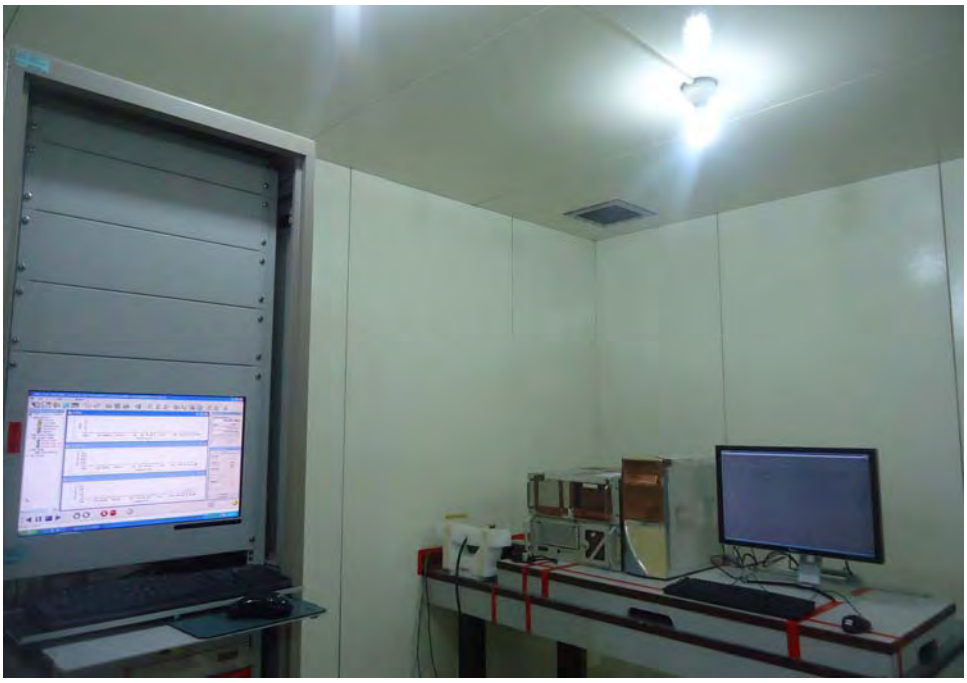

5.6. Power Frequency Magnetic Field (PMF)

5.6.1. Test Specification

EN 61000-4-8				
Item	Environmental Phenomena	Units	Test Specification	Performance Criterion
Enclosure Port				
	Power-Frequency Magnetic Field	Hz A/m (r.m.s.)	50 1	A

EUT tested in accordance with the specifications given by the standard of EN 61000-4-8.

Orientation : X, Y, Z

Test time : 180 Second

5.6.2. Test Instrument

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
EMC Immunity Tester	EMC-PARTNER AG	TRANSIENT 2000IN6	952	02/06/2014	(1)
Magentic Field Antenna	EMC-PARTNER AG	MF1000-1	155	02/06/2014	(1)
Test Site	ATL	TE08	TE08	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

5.6.3. Setup

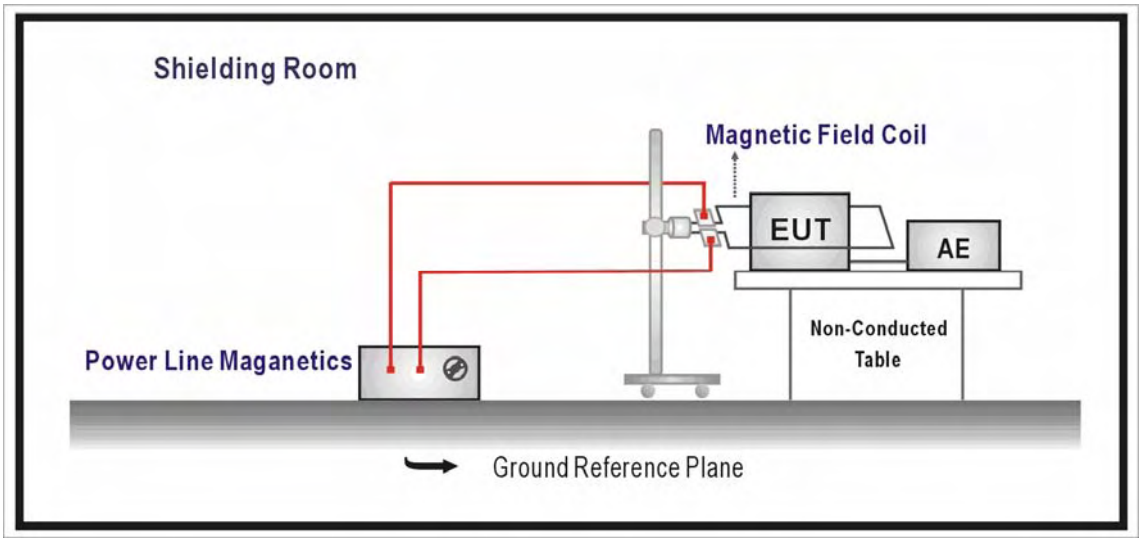

5.6.4. Test Procedure

a). The equipment was configured and connected to satisfy its functional requirements. It shall be placed on the GRP with the interposition of a 0.1m-thick insulating support.

b). The equipment cabinets shall be connected to the safety earth directly on the GRP via the earth terminal of the EUT.

c). The power supply, input and output circuits shall be connected to the sources of power supply, control and signal.

d). The cables supplied or recommended by the equipment manufacturer shall be used. 1 meter of all cables used shall be exposed to the magnetic field.

5.6.5. Test Result

Model Number	I-7520A			
Test Item	Power Frequency Magnetic Field			
Test Mode	Mode 1			
Date of Test	2014/02/07		Test Site	TE08
Polarization	Frequency (Hz)	Magnetic Strength (A/m)	Performance Criterion	Result
X Orientation	50	1	☒A ☐B	PASS
Y Orientation	50	1	☒A ☐B	PASS
Z Orientation	50	1	☒A ☐B	PASS

Note:

Criterion A : Operate as intended during and after the test

Criterion B : Operate as intended after the test

Criterion C : Loss/Error of function

☐ Additional Information

☐ EUT stopped operation and could / could not be reset by operator at _____ dBuV (V) at frequency ____ MHz.

☒ No false alarms or other malfunctions were observed during or after the test.
The acceptance criteria were met, and the EUT passed the test.

5.6.6. Test Photograph

Test Mode: Mode 1

Description: Front View of PMF Test

5.7. Voltage Dips and Interruption

5.7.1. Test Specification

EN 61000-4-11			
Environmental Phenomena	Units	Test Specification	Performance Criterion
Input AC Power Ports			
Voltage Dips	0	% Reduction	B
	0.5	Period	
	70	% Reduction	C
	25	Period	
Voltage Interruptions	0	% Reduction	C
	250	Period	

5.7.2. Test Instrument

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
EMC Immunity Tester	EMC-PARTNER AG	TRANSIENT 2000IN6	952	02/06/2014	(1)
Test Site	ATL	TE08	TE08	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.
NOTE: N.C.R. = No Calibration Request.

5.7.3. Setup

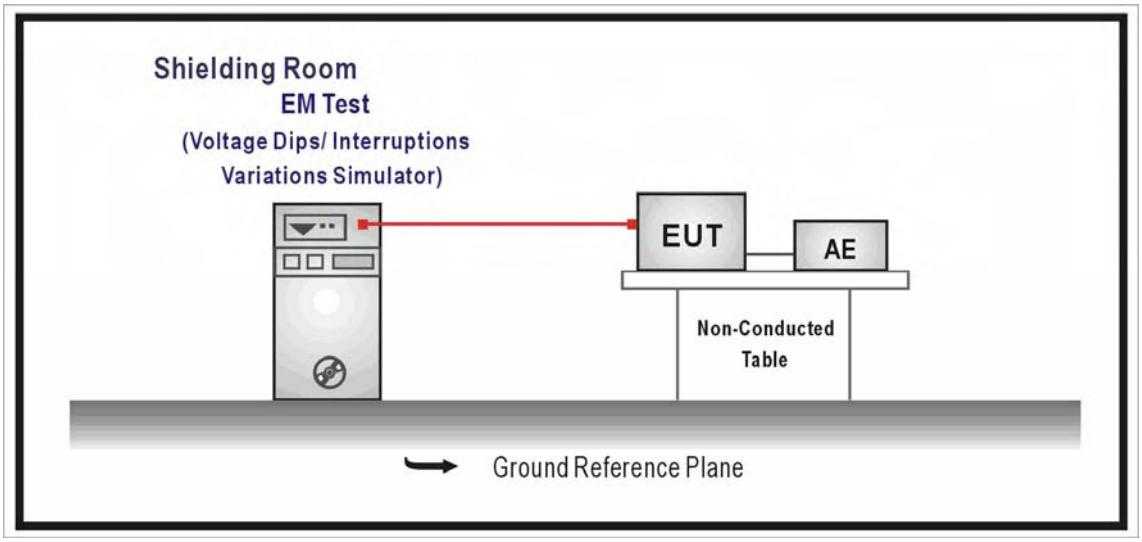

5.7.4. Test Procedure

The EUT and its load are placed on a table which is 0.8 meter above a metal ground plane measured 1m*1m min. And 0.65mm thick min. And projected beyond the EUT by at least 0.1m on all sides. The power cord shall be used the shortest power cord as specified by the manufacturer.

For Voltage Dips/ Interruptions test:

The selection of test voltage is based on the rated power range. If the operation range is large than 20% of lower power range, both end of specified voltage shall be tested. Otherwise, the typical voltage specification is selected as test voltage.

The EUT is connected to the power mains through a coupling device that directly couples to the Voltage Dips and Interruption Generator.

The EUT shall be tested for 30% voltage dip of supplied voltage and duration 25 Periods,

for 95% voltage dip of supplied voltage and duration 0.5 Periods with a sequence of three voltage dips with intervals of 10 seconds, and for 95% voltage interruption of supplied voltage and duration 250 Periods with a sequence of three voltage interruptions with intervals of 10 seconds.

Voltage phase shifting are shall occur at 0^0, 45^0, 90^0, 135^0, 180^0, 225^0, 270^0, 315^0 of the voltage.

5.7.5. Test Result

Model Number	I-7520A				
Test Item	Voltage Dips and Interruption Measurement				
Test Mode	Mode 1				
Angle	0~360 degree		Step	45 degree	
Date of Test	2014/02/10		Test Site	TE08	
Test Voltage (Vac)	Voltage Reduction (%)	Test Duration (ms)	Performance Criterion	Test Result	Observation
230	>95	10	☒A ☐B ☐C	Pass	Note1
	30	500	☒A ☐B ☐C	Pass	Note1
	>95	5000	☐A ☐B ☒C	Pass	Note2
100	>95	10	☒A ☐B ☐C	Pass	Note1
	30	500	☒A ☐B ☐C	Pass	Note1
	>95	5000	☐A ☐B ☒C	Pass	Note2

Note 1: The acceptance criteria were met, and the EUT passed the test.

Criterion A : Operate as intended during and after the test

Criterion B : Operate as intended after the test

Criterion C : Loss/Error of function

☐ Additional Information

☐ EUT stopped operation and could / could not be reset by operator at_____dBuV(V) at frequency_____MHz.

☒ No false alarms or other malfunctions were observed during or after the test.

Note 2: The power is temporary off and can be reset by the operator.

5.7.6. Test Photograph

Test Mode:	Mode 1
Description:	Front View of Dips Test

6 EUT Photograph

(1) EUT Photo

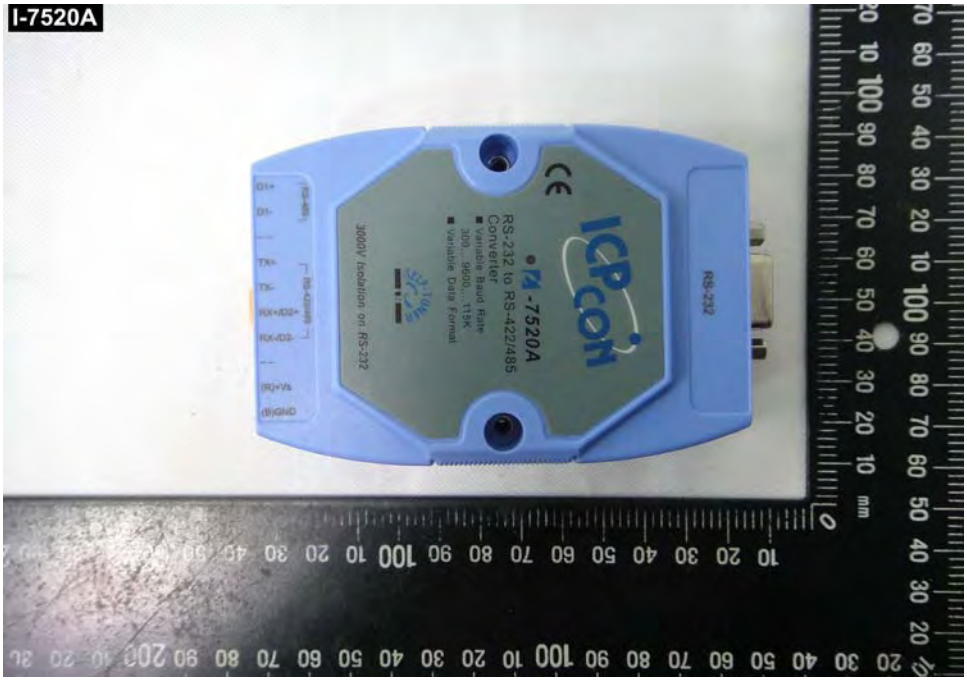

(2) EUT Photo

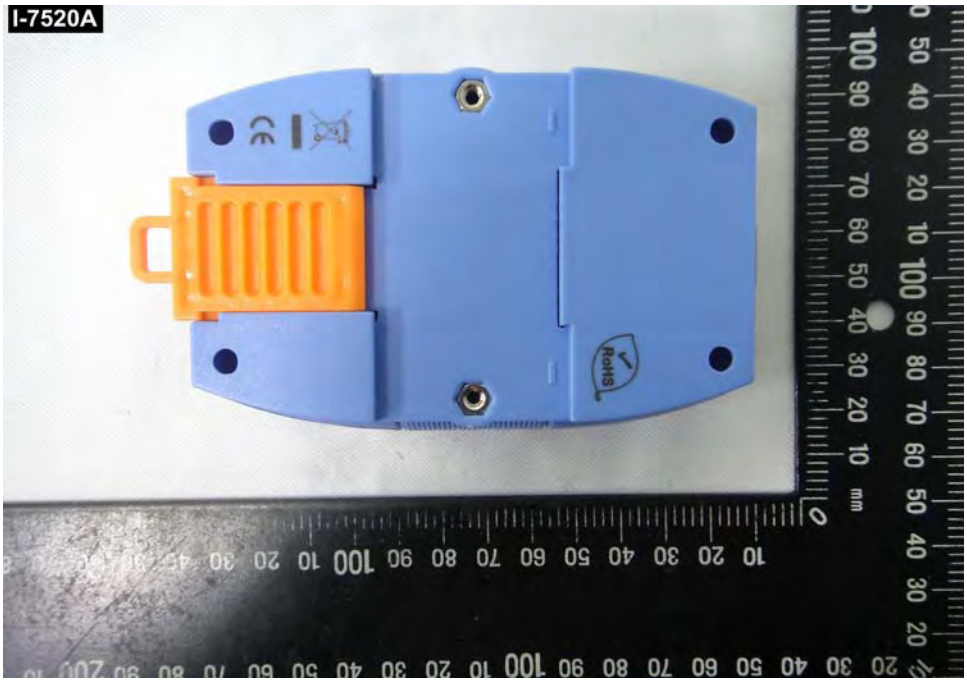

(3) EUT Photo

(4) EUT Photo

(5) EUT Photo

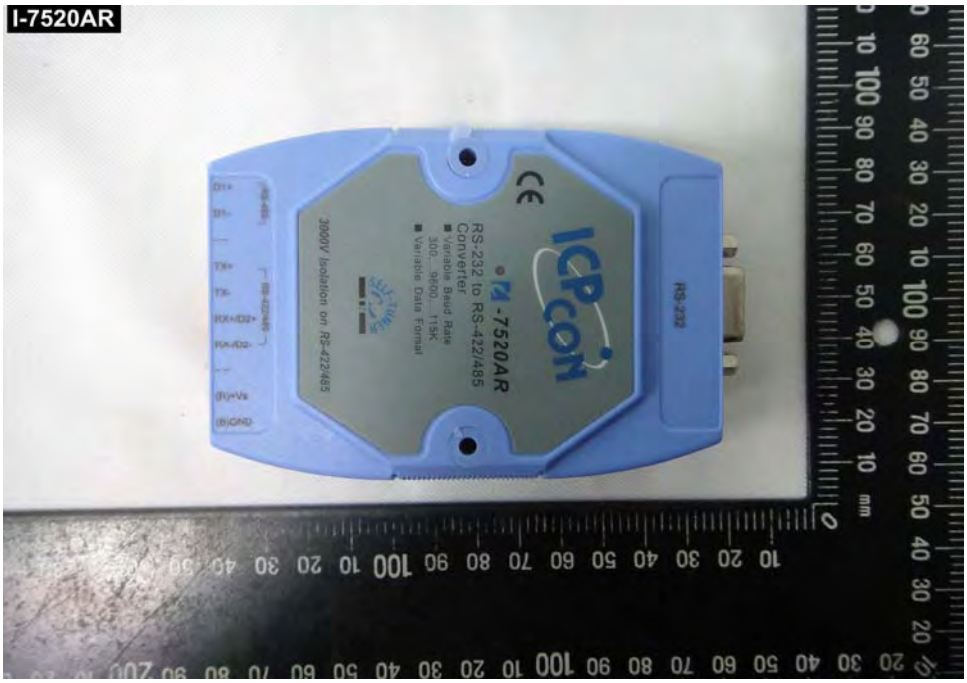

(6) EUT Photo

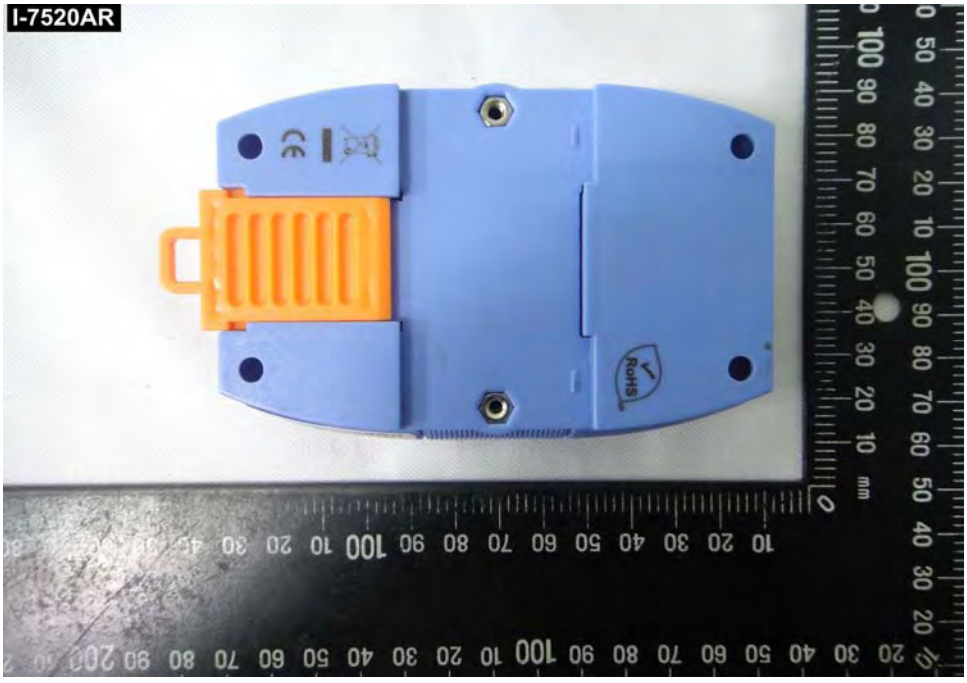

(7) EUT Photo

(8) EUT Photo

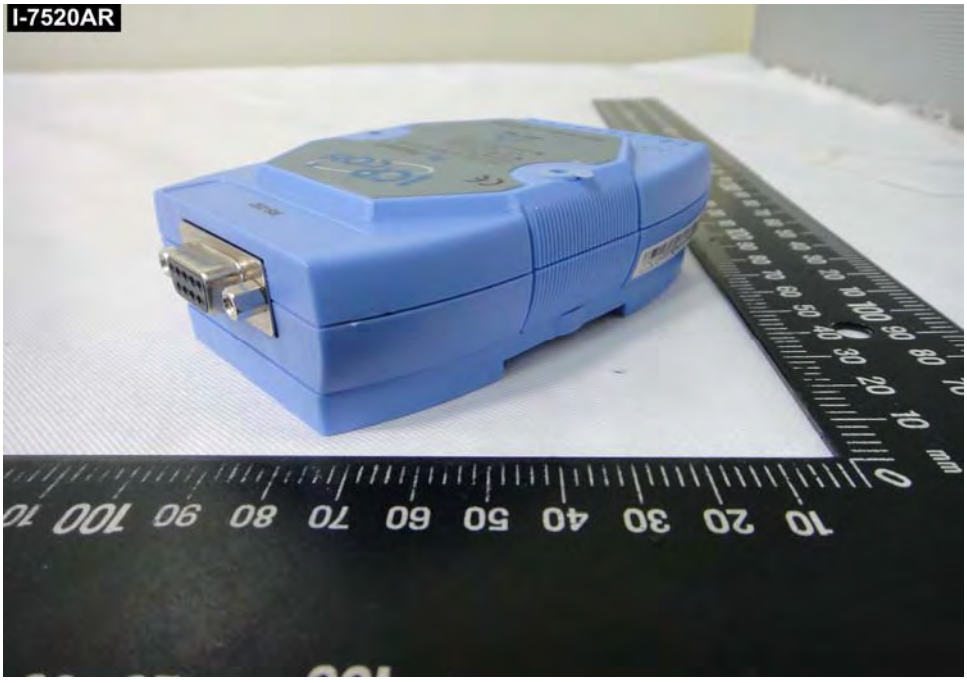

(9) EUT Photo

(10)EUT Photo

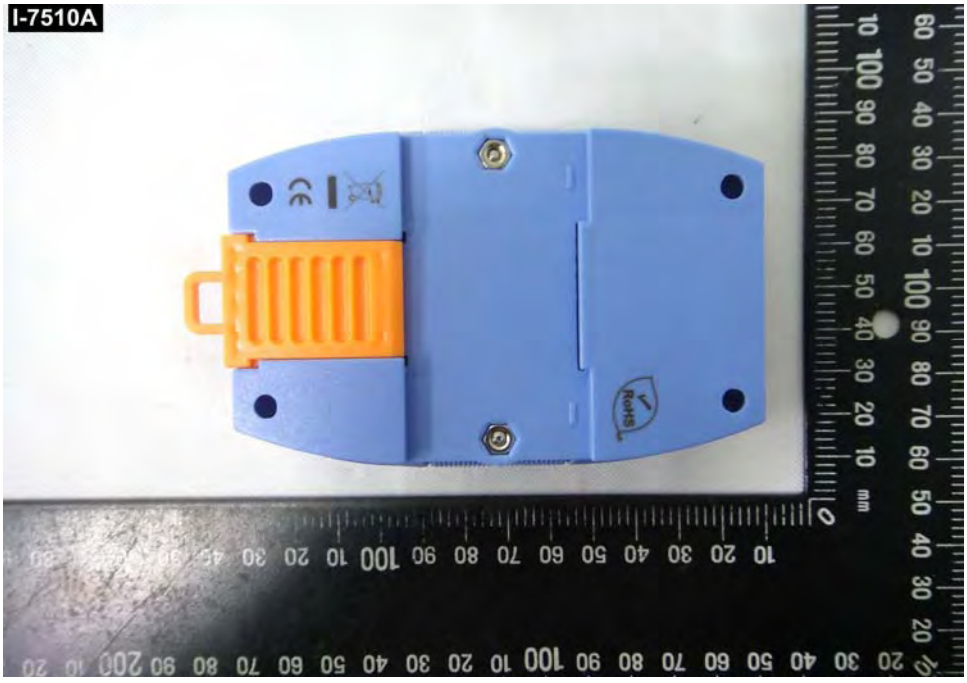

(11)EUT Photo

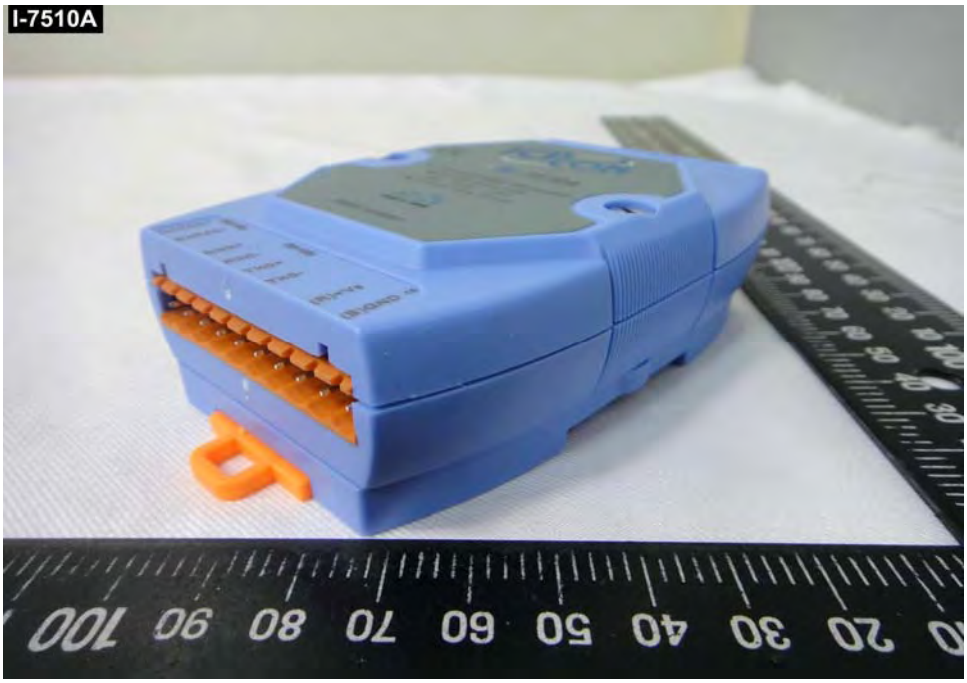

(12)EUT Photo

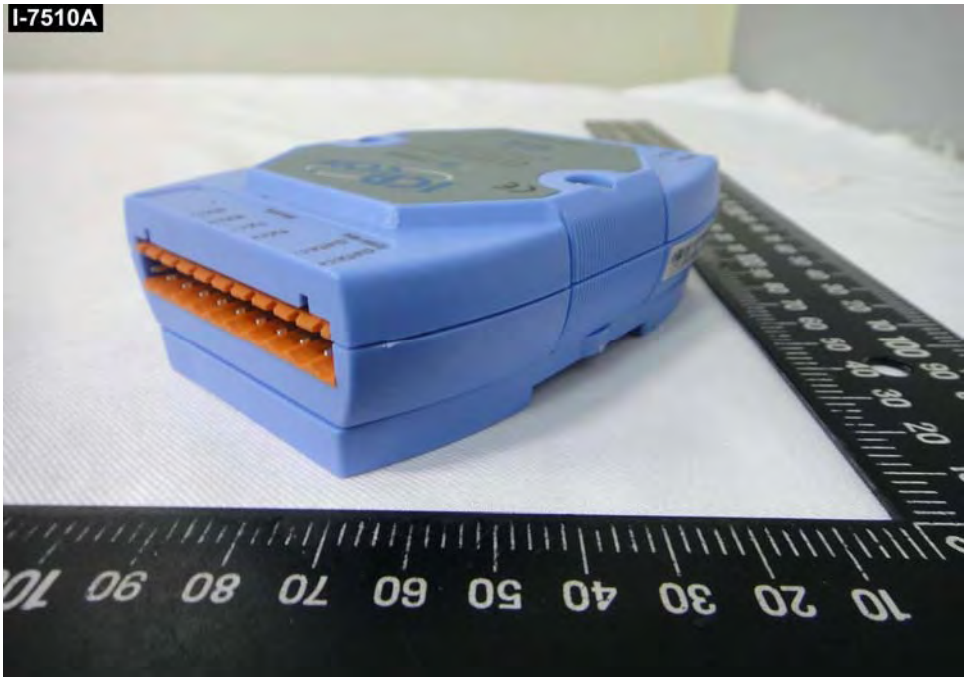

(13)EUT Photo

(14)EUT Photo

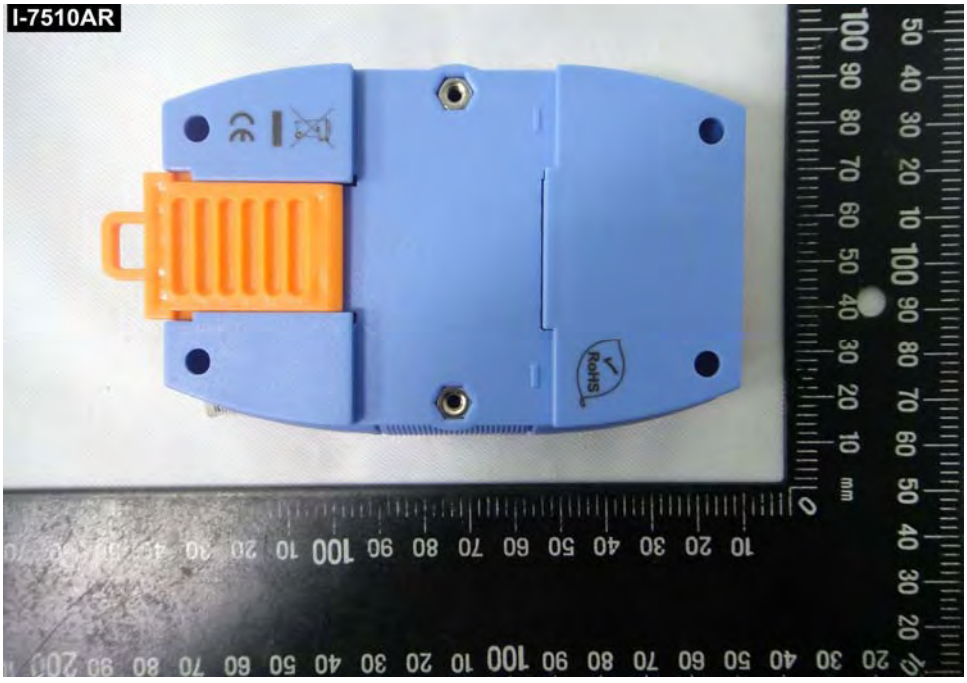

(15)EUT Photo

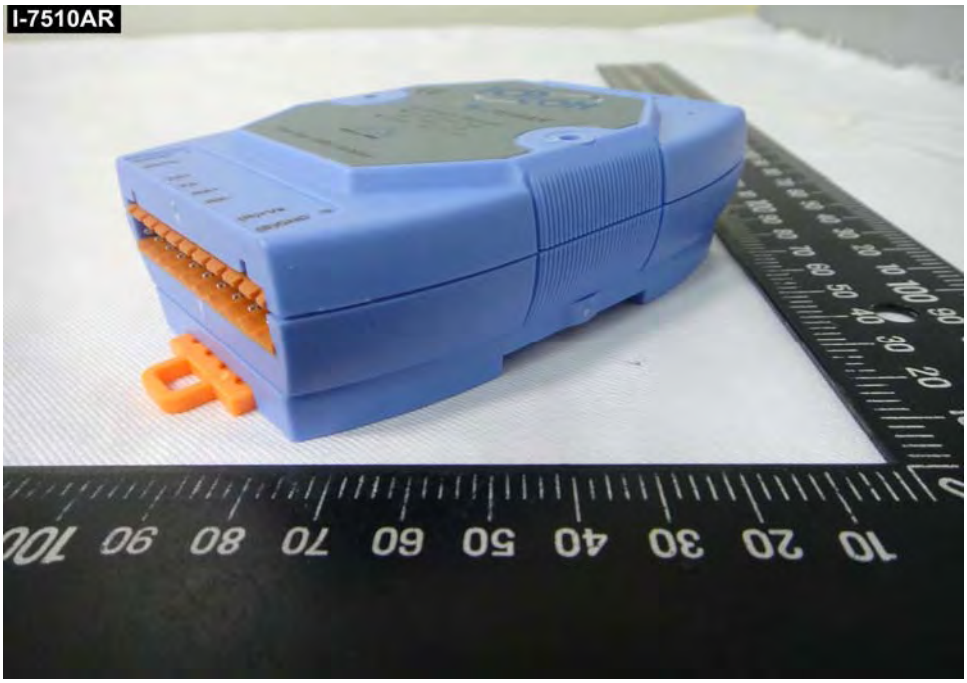

(16)EUT Photo

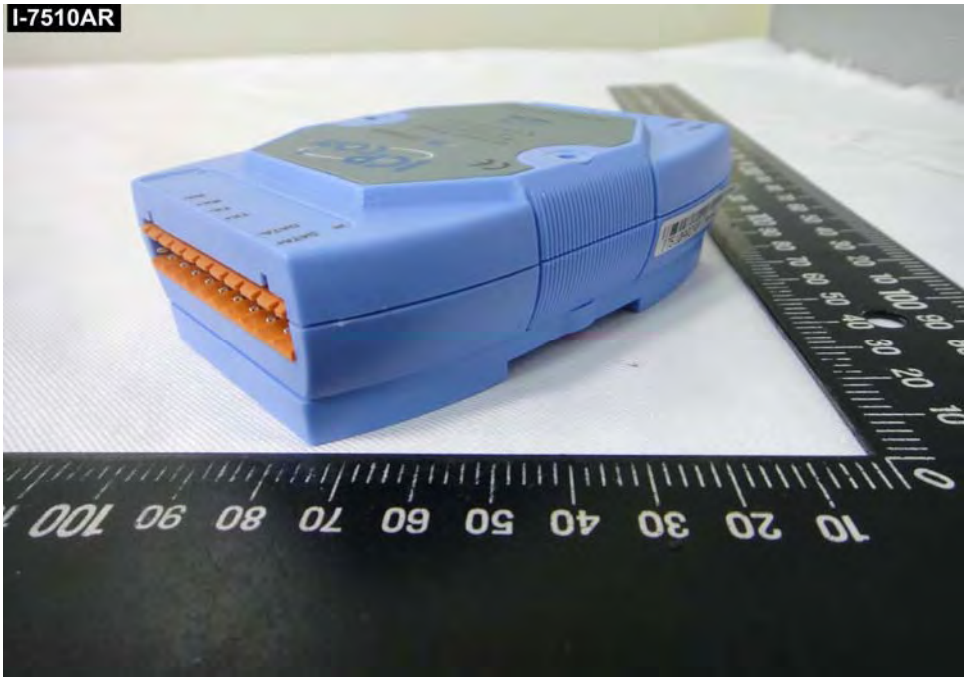

(17)EUT Photo

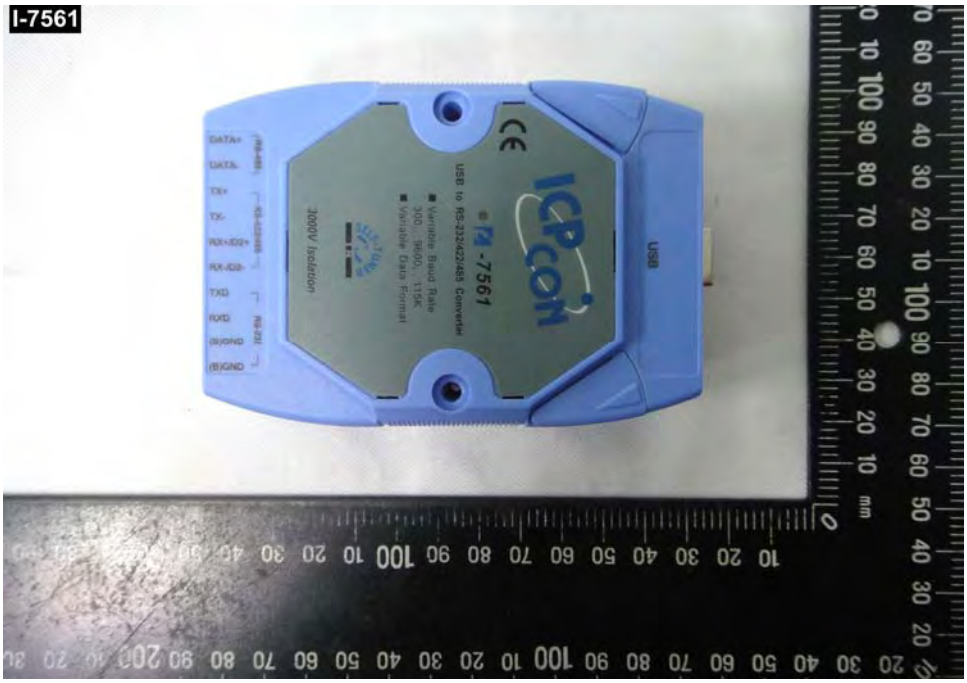

(18)EUT Photo

(19)EUT Photo

(20)EUT Photo

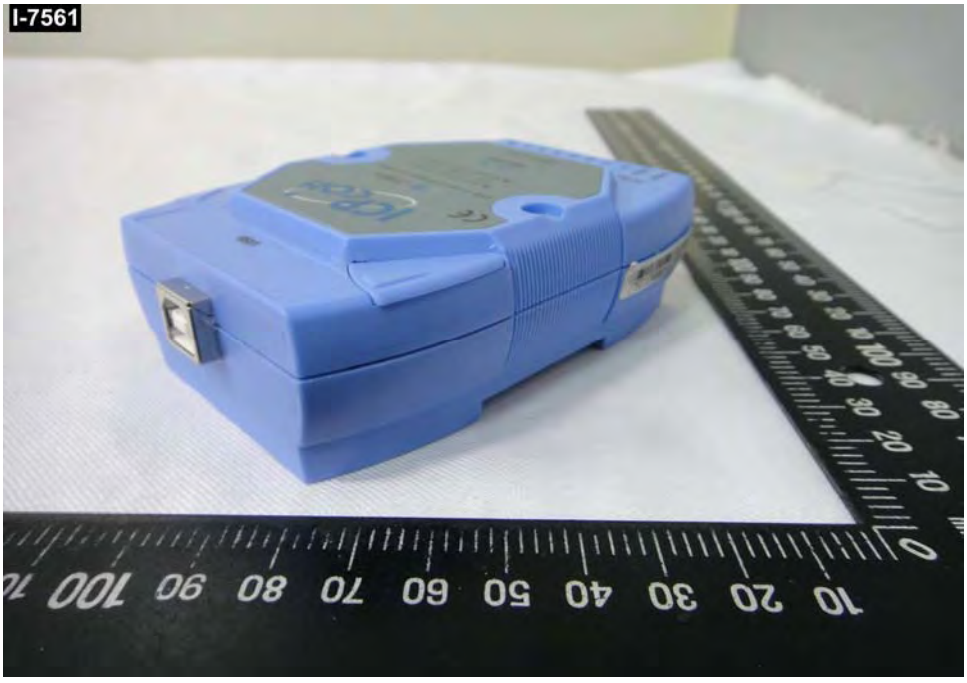

(21)EUT Photo

(22)EUT Photo

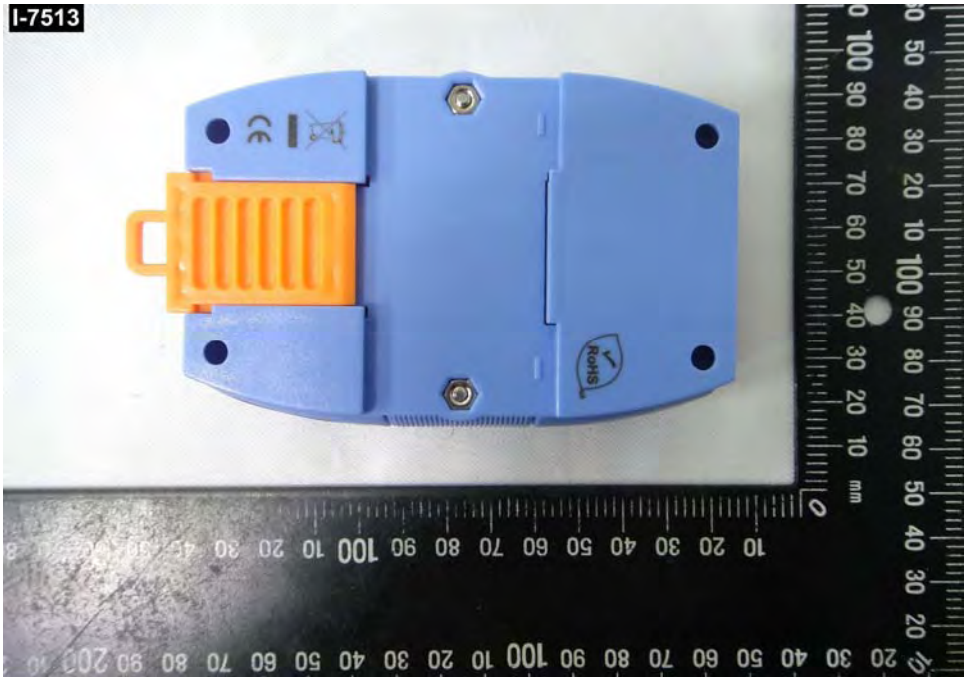

(23)EUT Photo

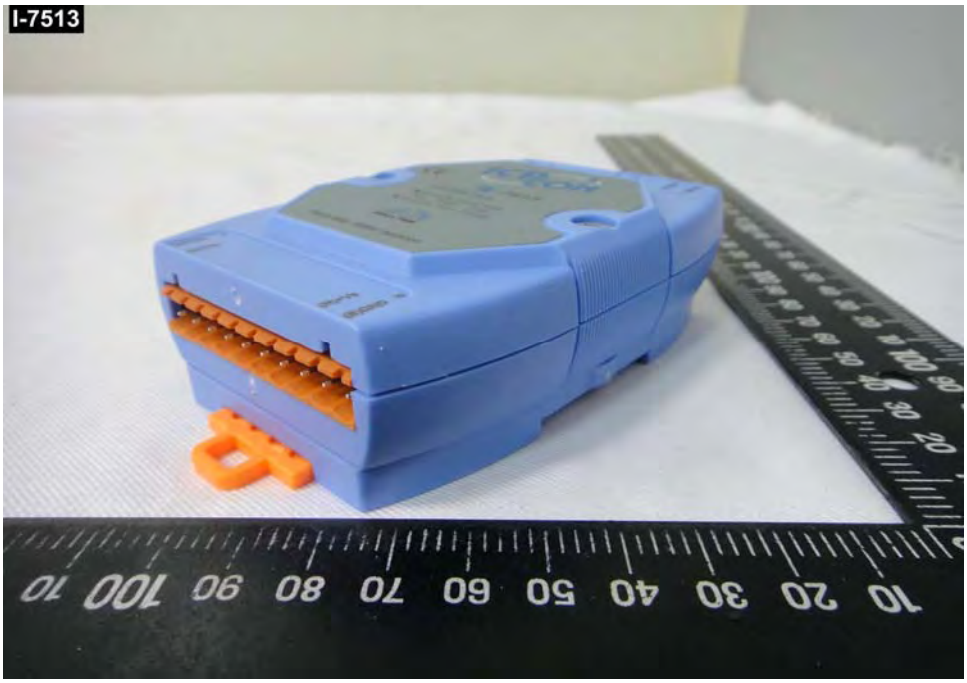

(24)EUT Photo

(25)EUT Photo

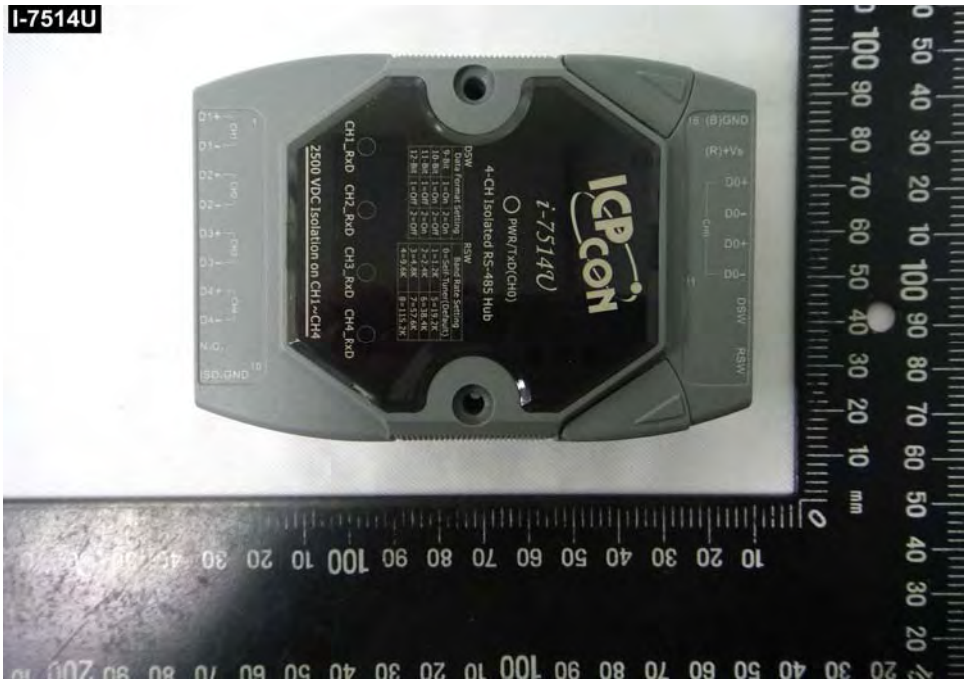

(26)EUT Photo

(27)EUT Photo

(28)EUT Photo

(29)EUT Photo

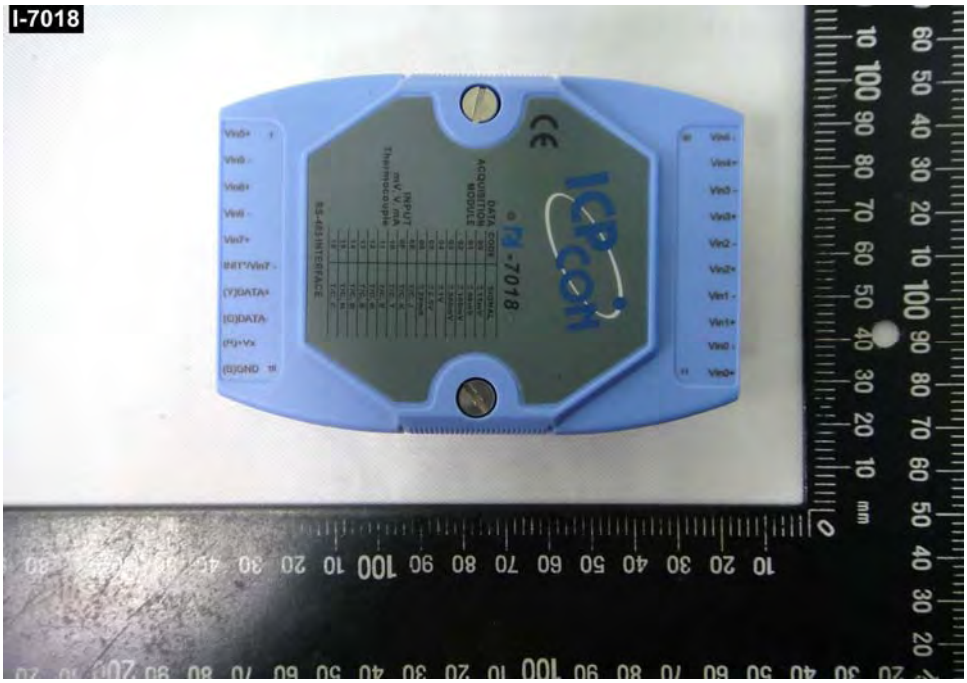

(30)EUT Photo

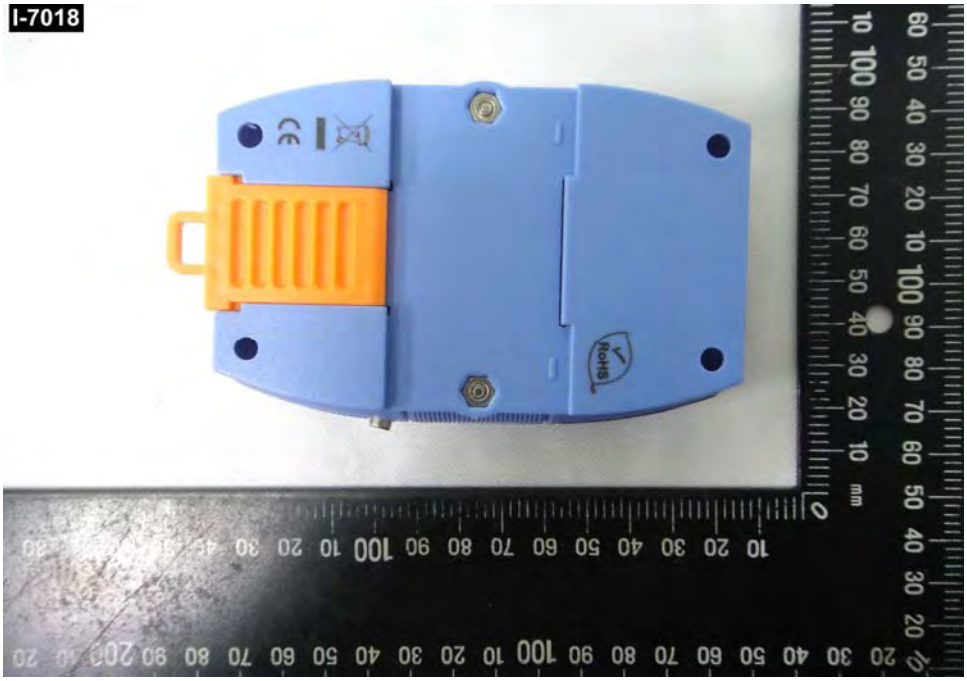

(31)EUT Photo

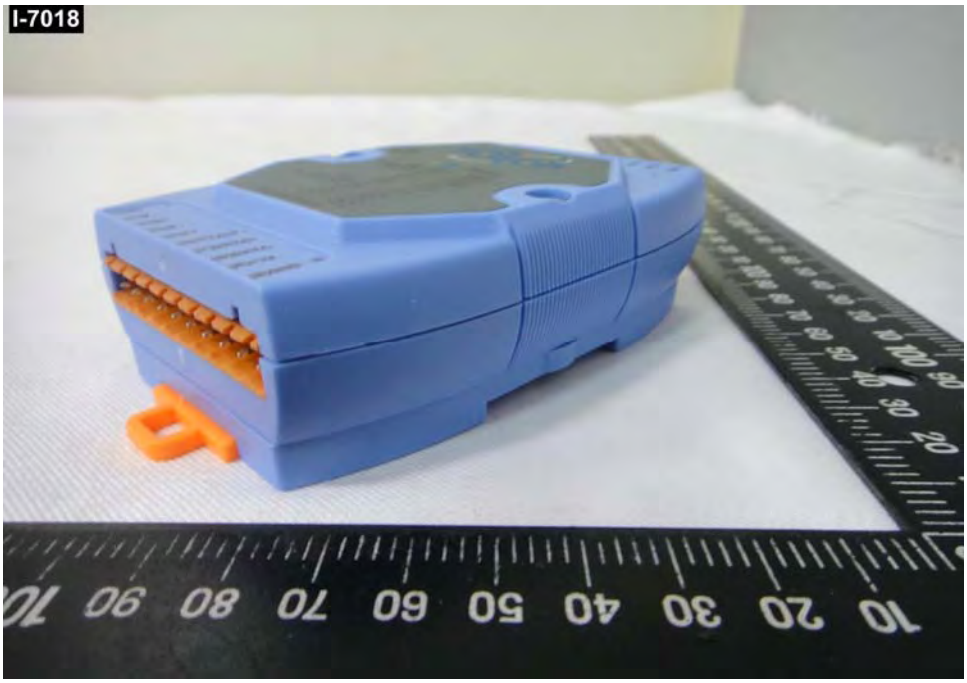

(32)EUT Photo

(33)EUT Photo

(34)EUT Photo

(35)EUT Photo

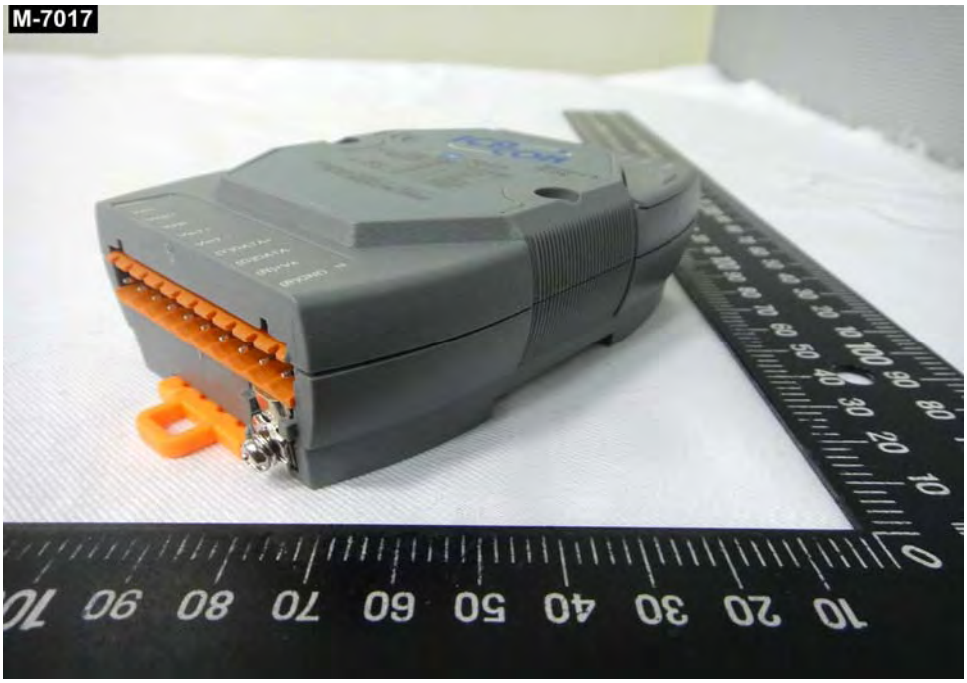

(36)EUT Photo

(37)EUT Photo

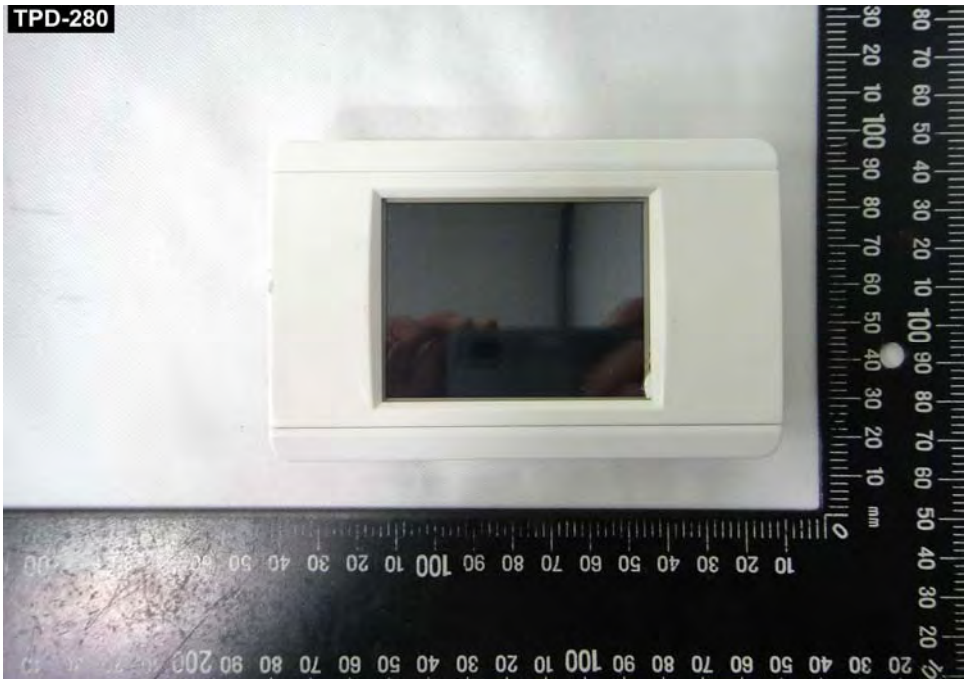

(38)EUT Photo

(39)EUT Photo

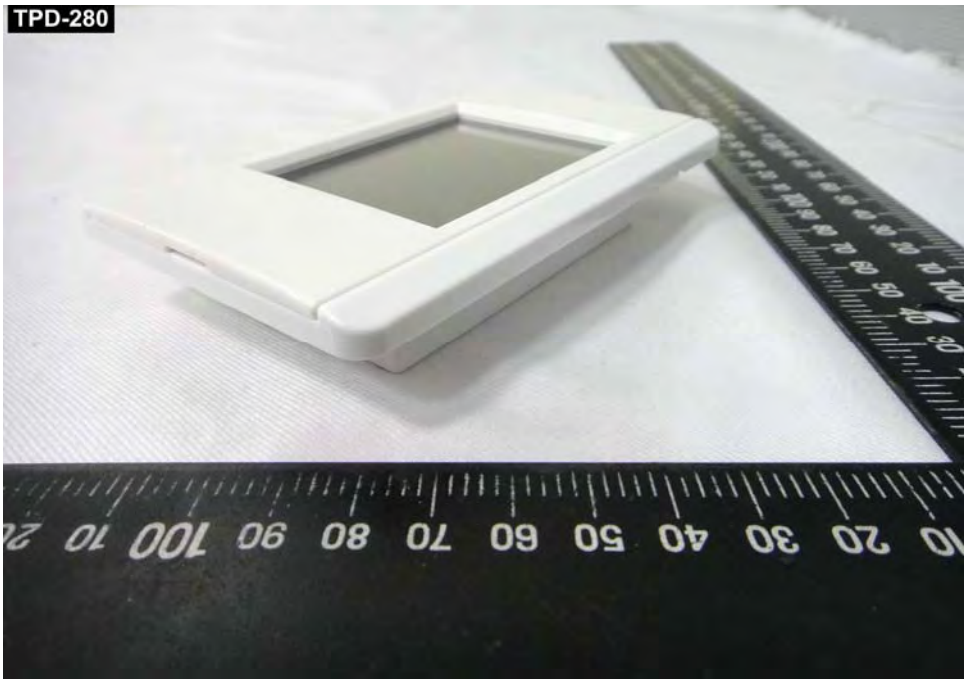

(40)EUT Photo

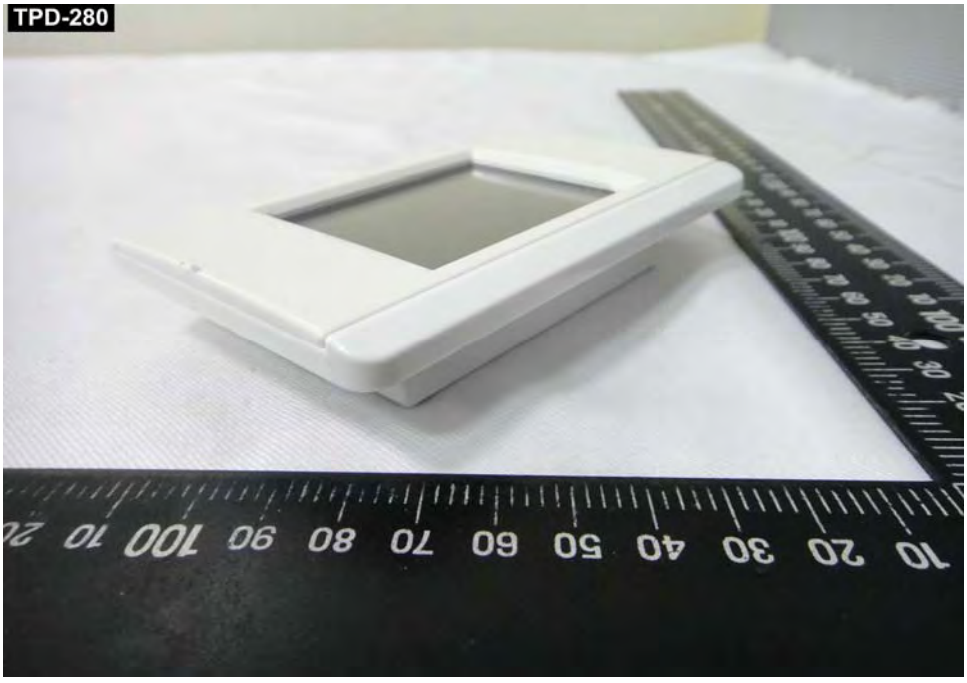

(41)EUT Photo

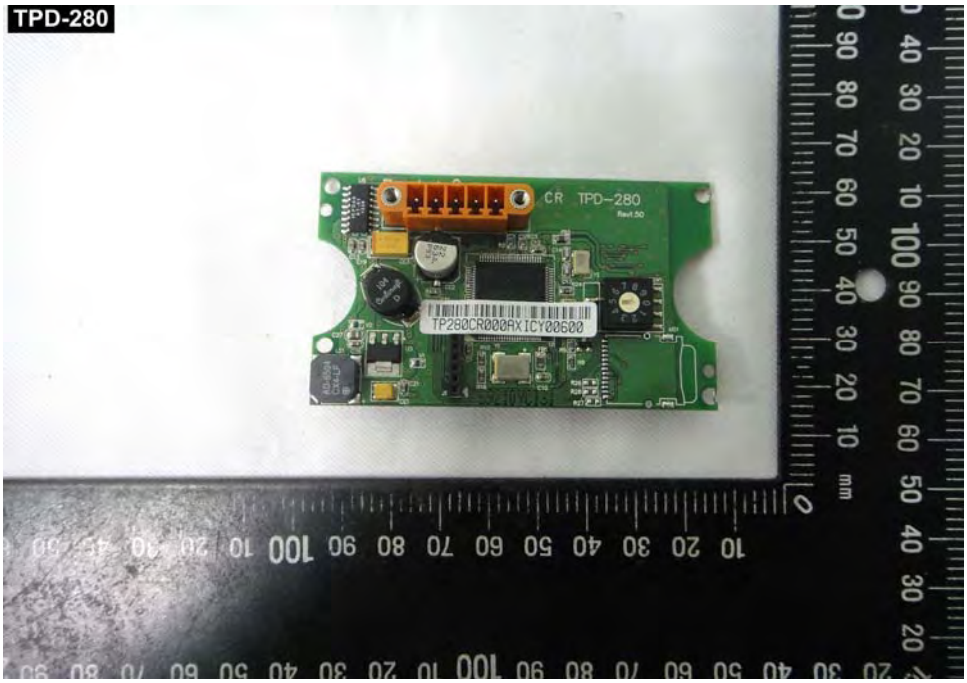

(42)EUT Photo

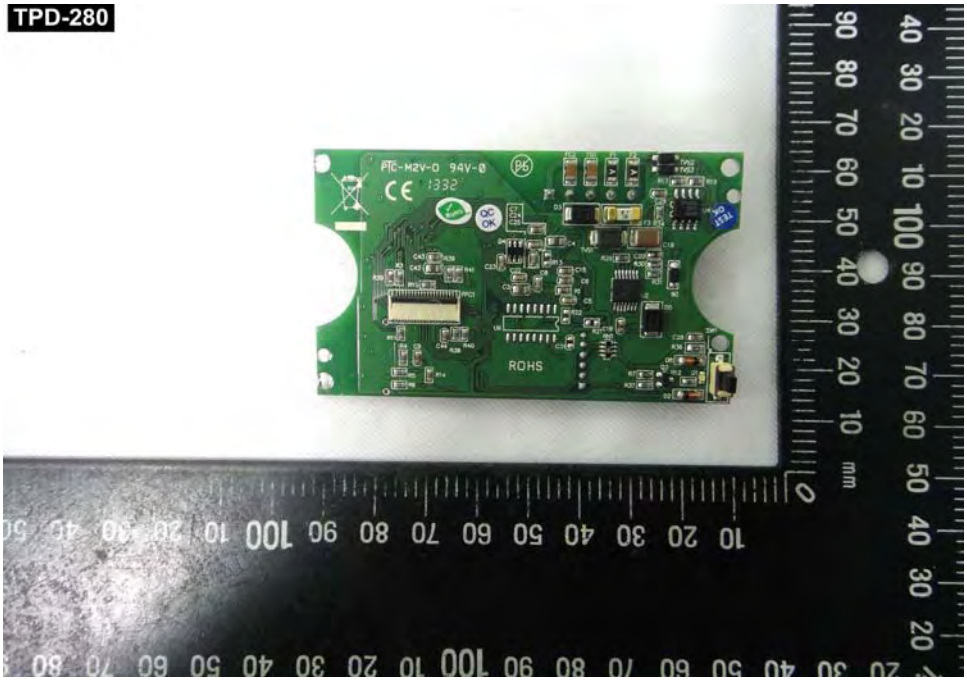

(43)EUT Photo

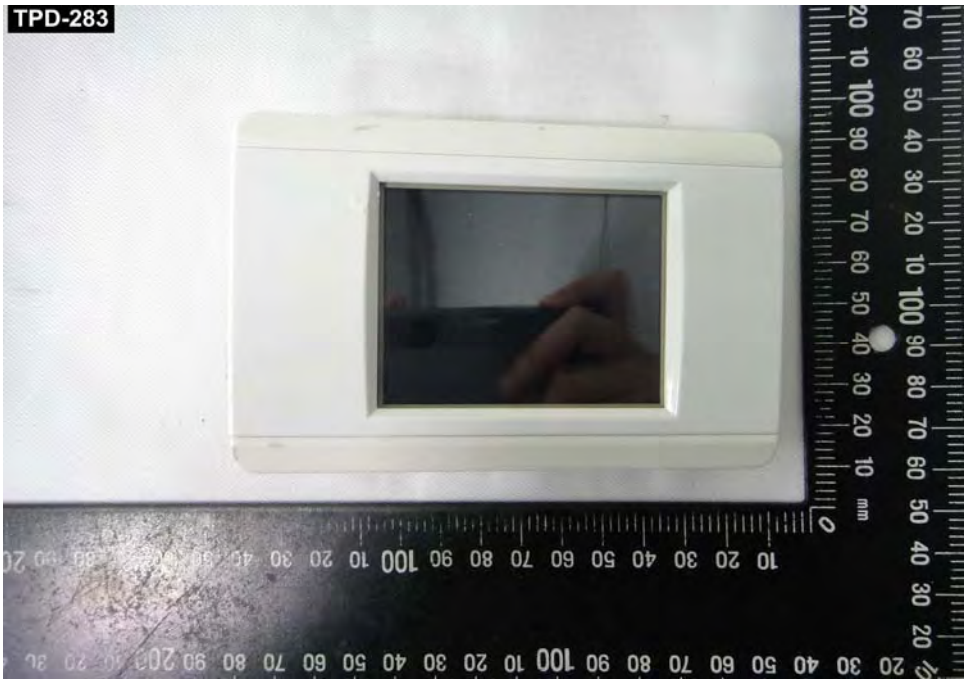

(44)EUT Photo

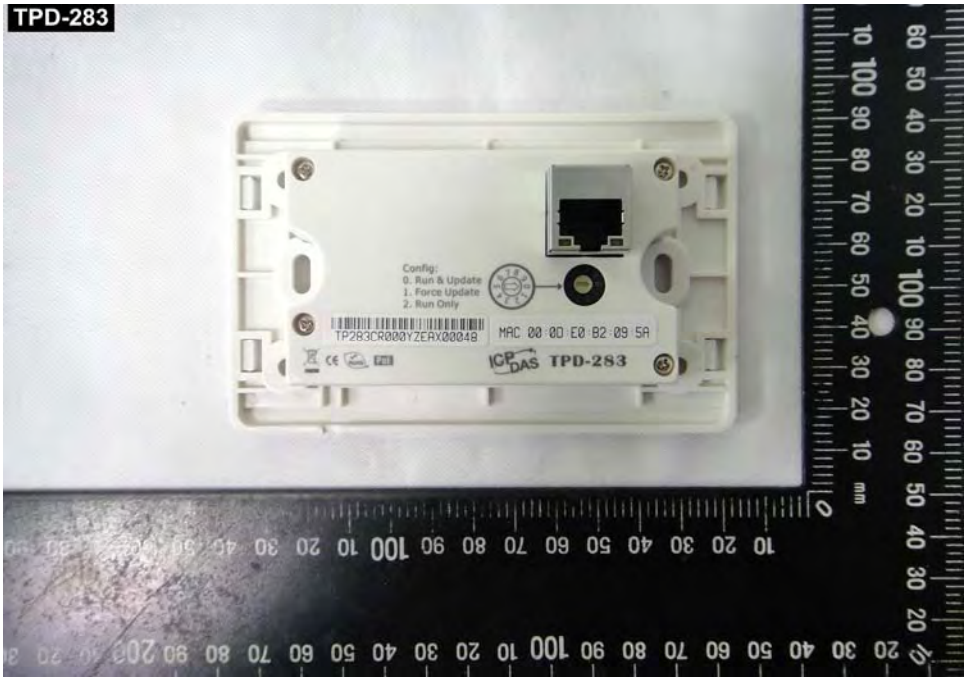

(45)EUT Photo

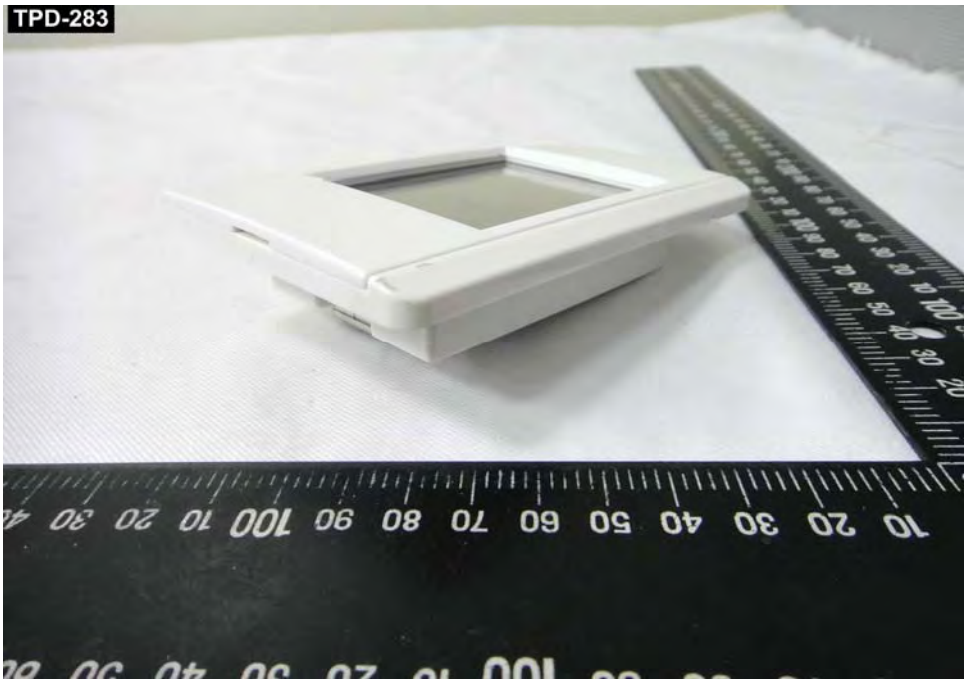

(46)EUT Photo

(47)EUT Photo

(48)EUT Photo

(49)EUT Photo

(50)EUT Photo

(51)EUT Photo

(52)EUT Photo

(53)EUT Photo

(54)EUT Photo

(55)EUT Photo

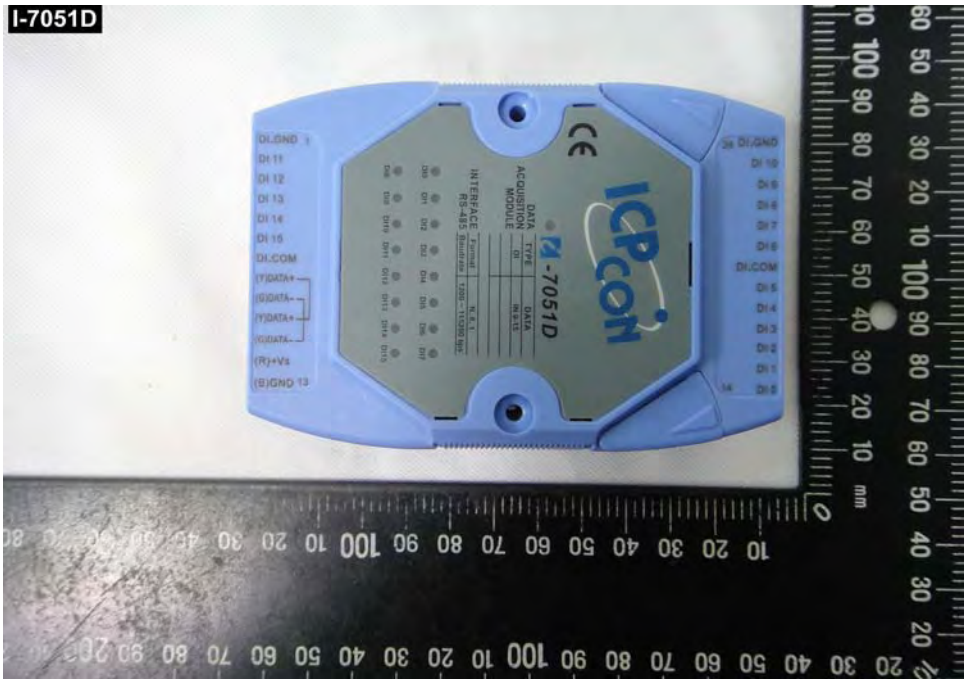

(56)EUT Photo

(57)EUT Photo

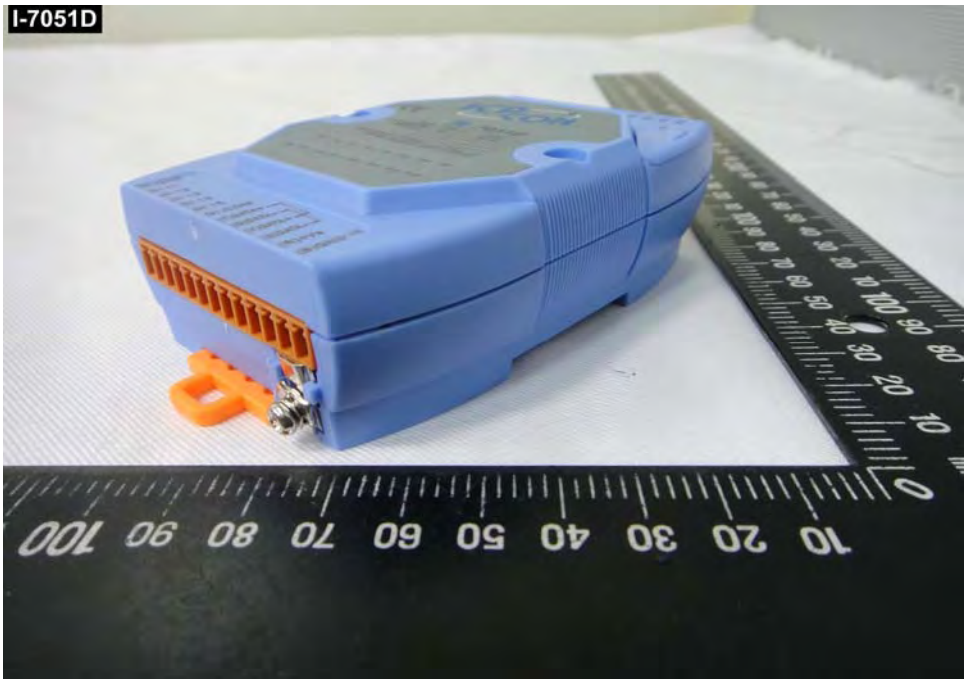

(58)EUT Photo

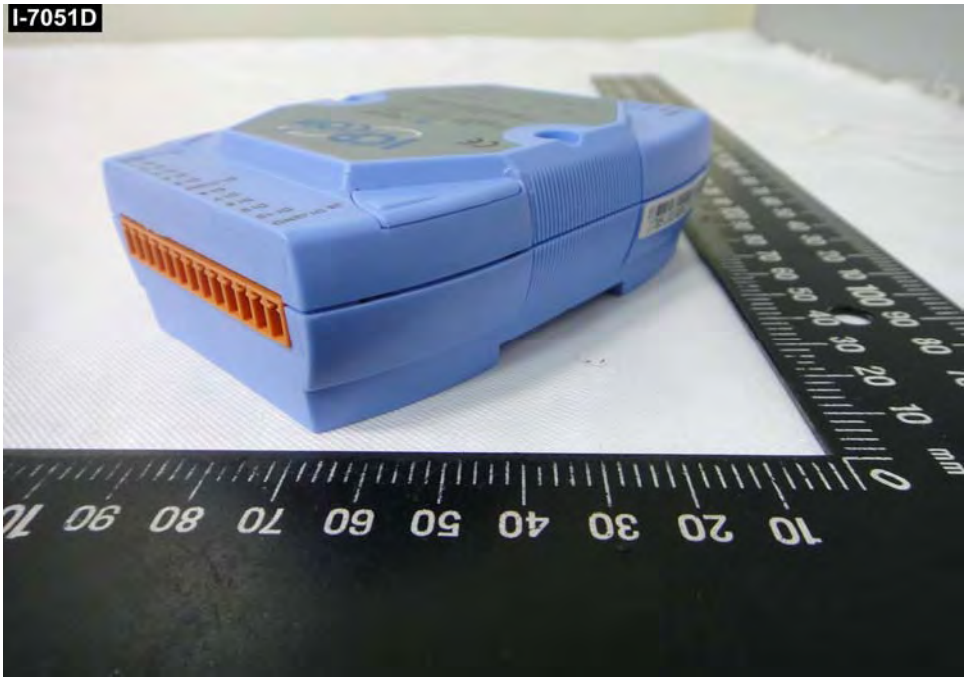

(59)EUT Photo

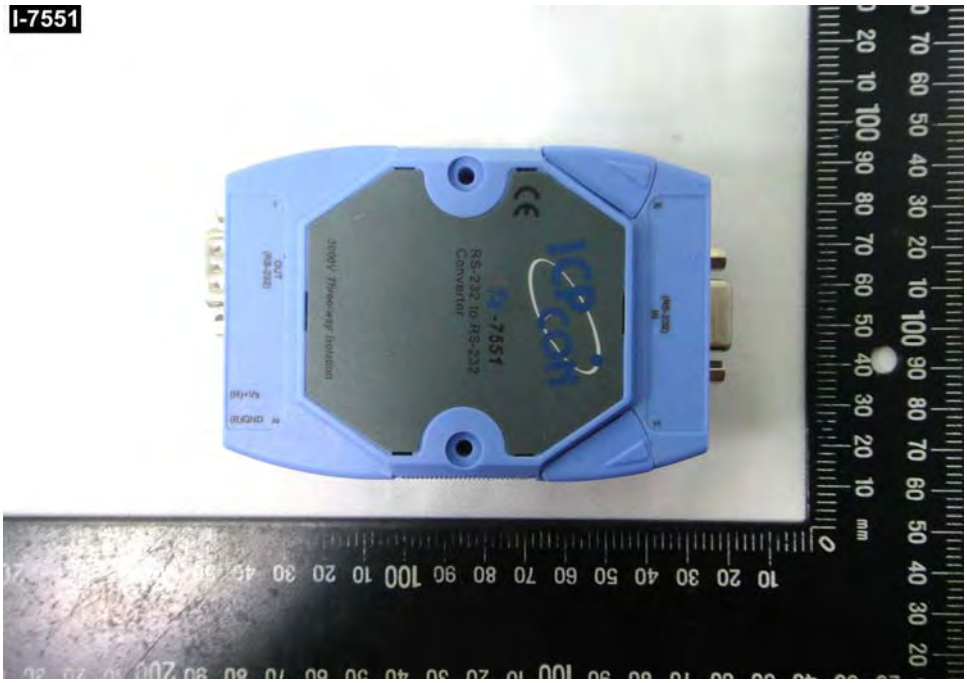

(60)EUT Photo

(61)EUT Photo

(62)EUT Photo

(63)EUT Photo

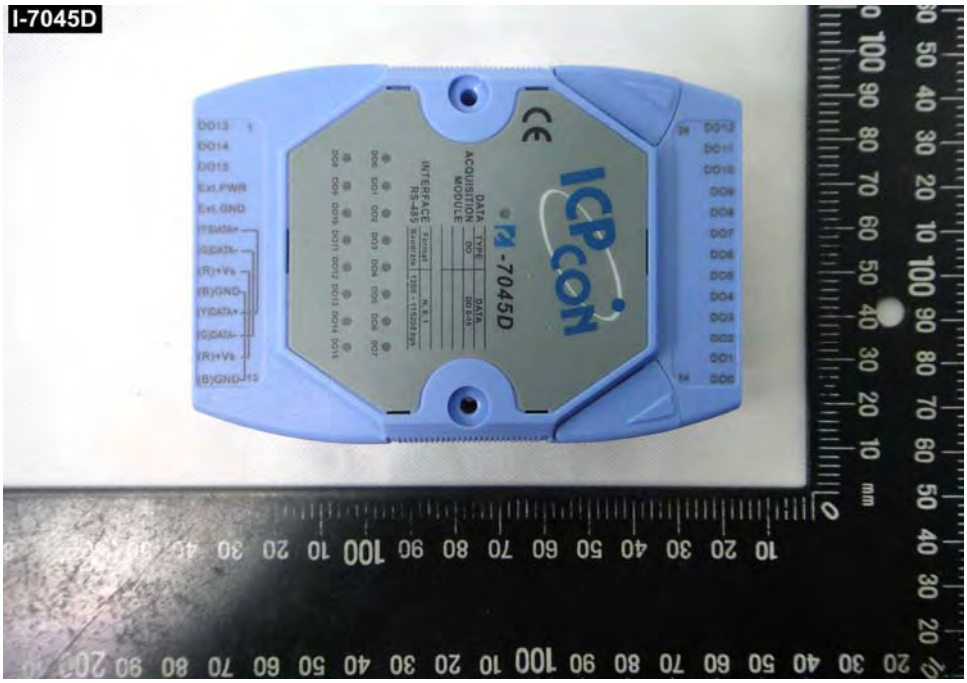

(64)EUT Photo

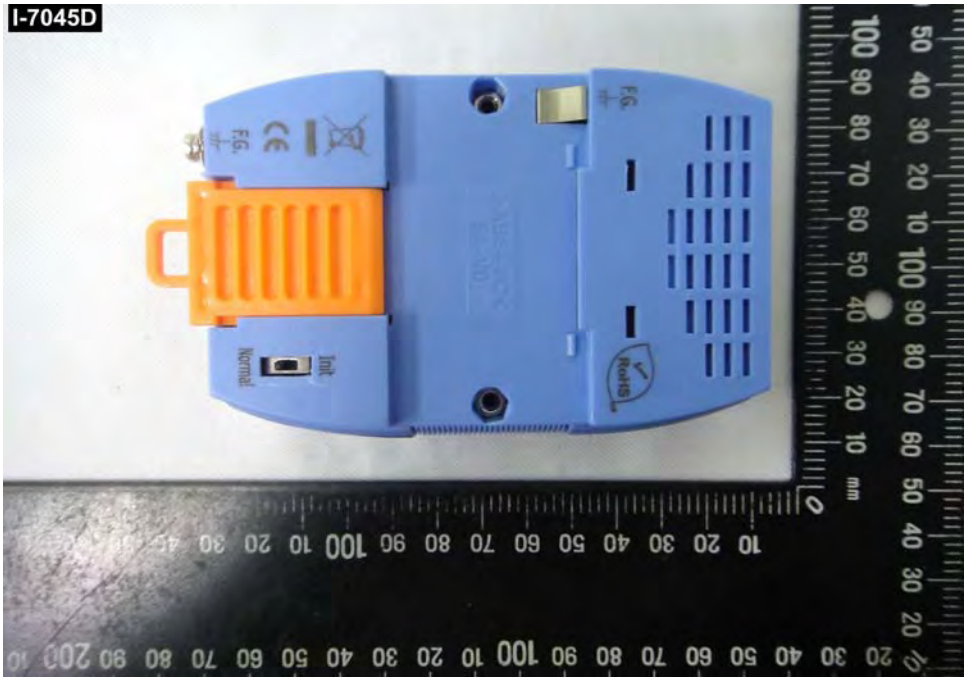

(65)EUT Photo

(66)EUT Photo

(67)EUT Photo

(68)EUT Photo

(69)EUT Photo

(70)EUT Photo

(71)EUT Photo

(72)EUT Photo

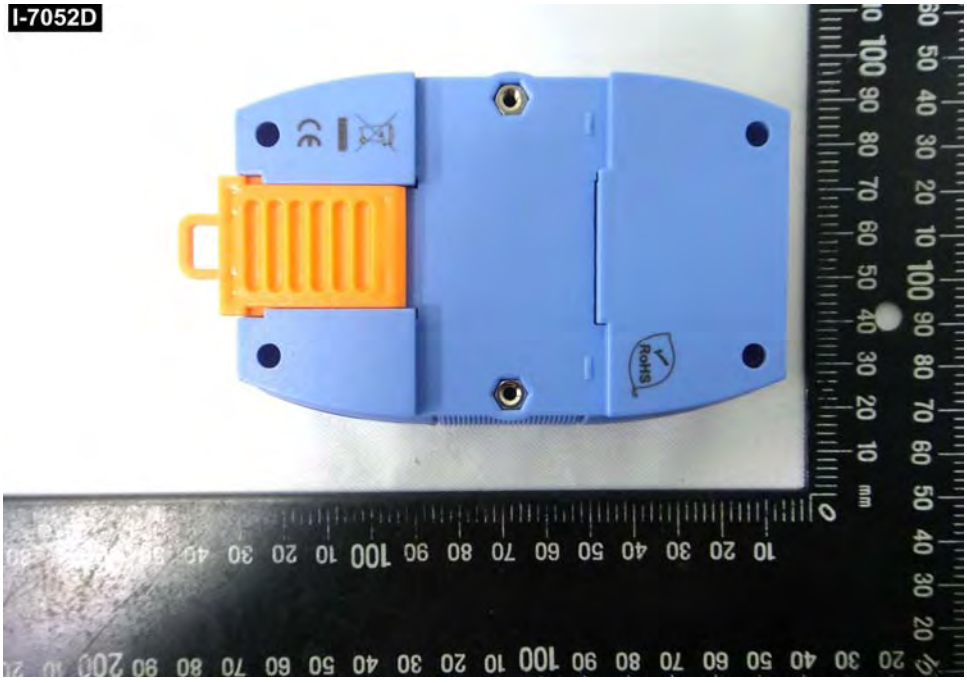

(73)EUT Photo

(74)EUT Photo

(75)EUT Photo

(76)EUT Photo

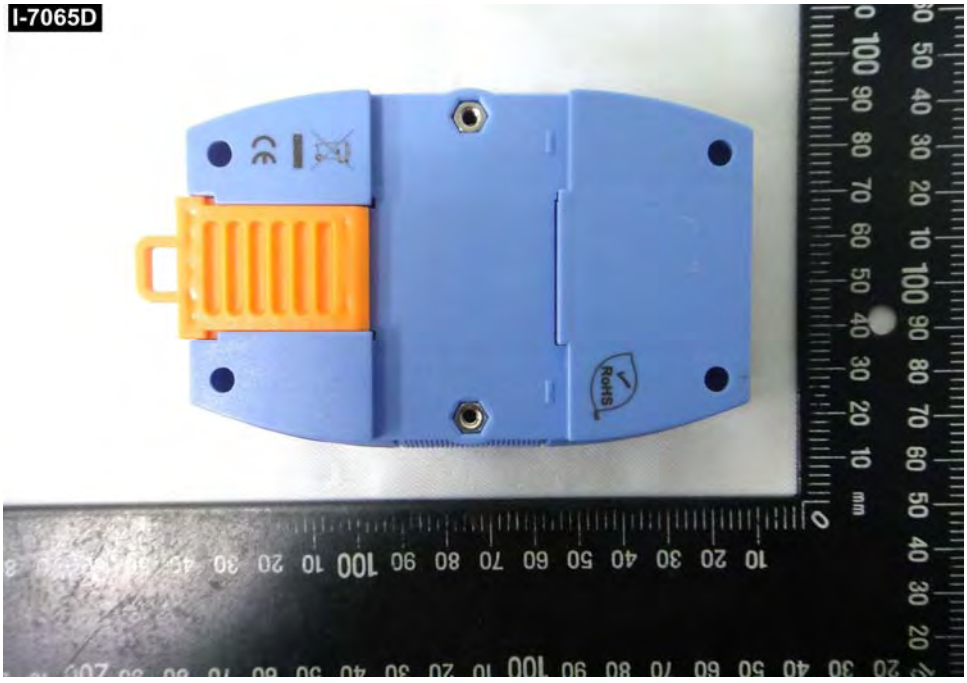

(77)EUT Photo

(78)EUT Photo

(79)EUT Photo

(80)EUT Photo

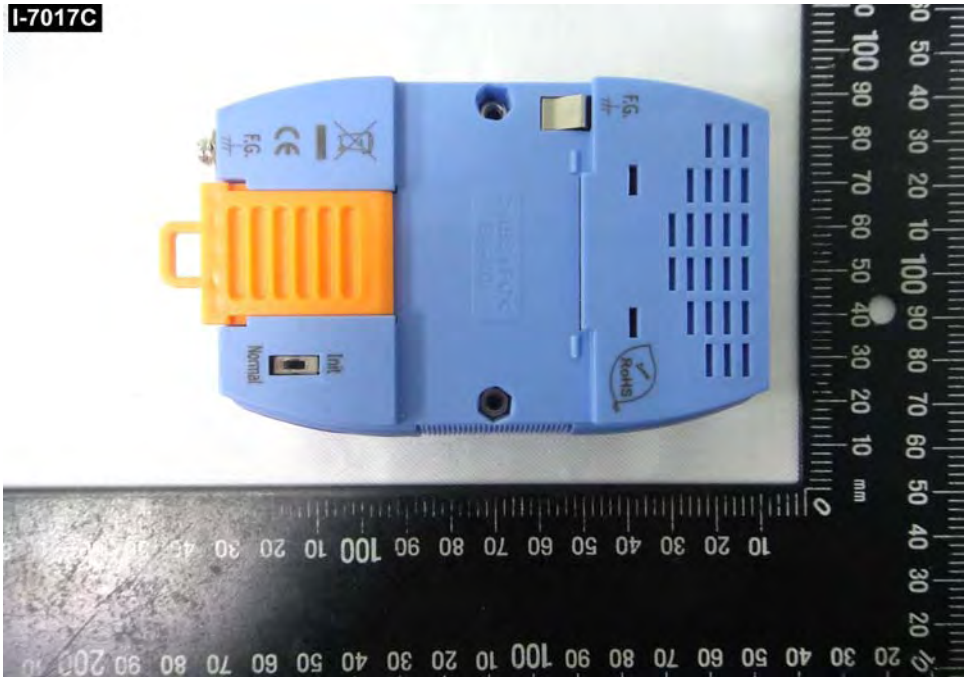

(81)EUT Photo

(82)EUT Photo

(83)EUT Photo

(84)EUT Photo

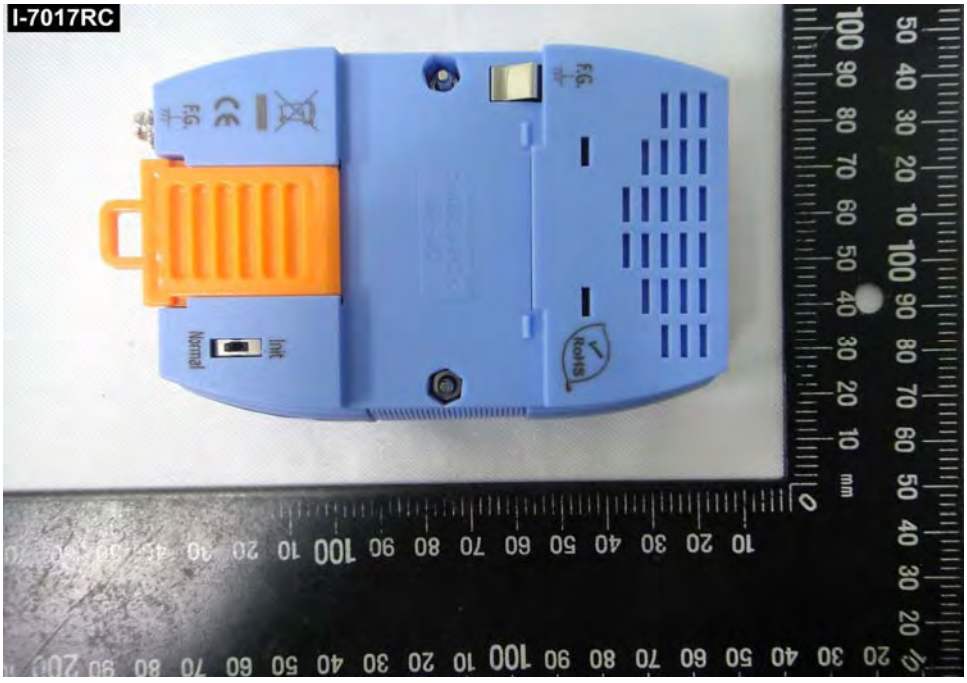

(85)EUT Photo

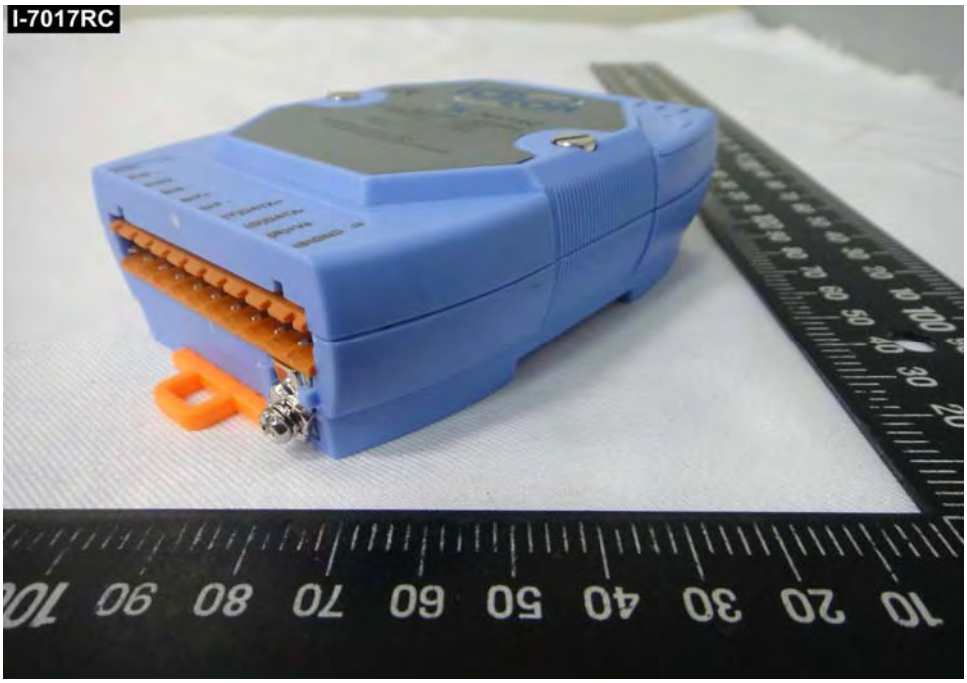

(86)EUT Photo

(87)EUT Photo

(88)EUT Photo

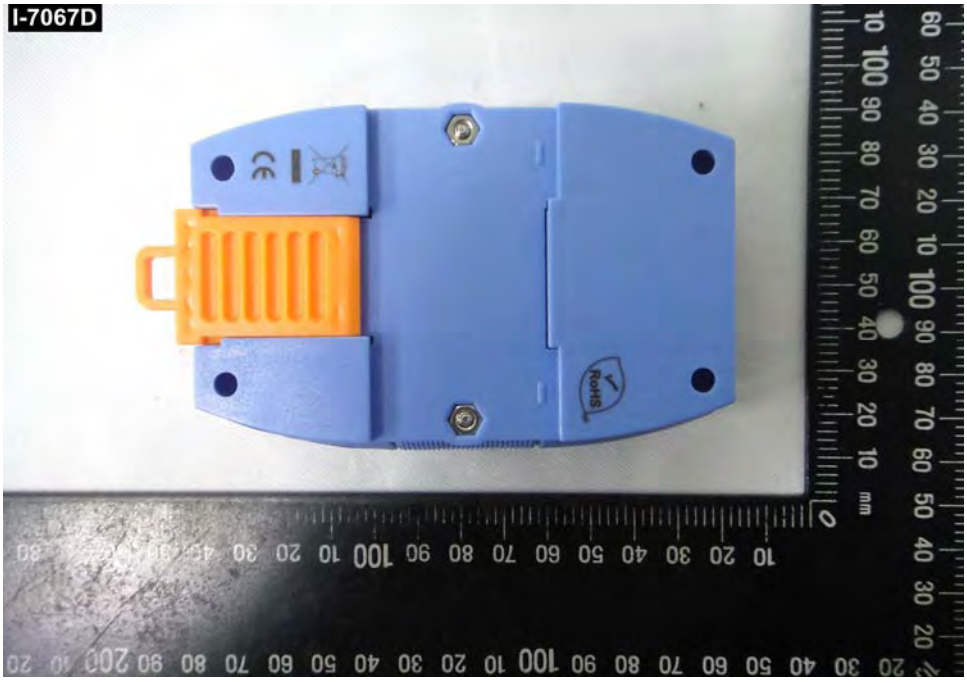

(89)EUT Photo

(90)EUT Photo

(91)EUT Photo

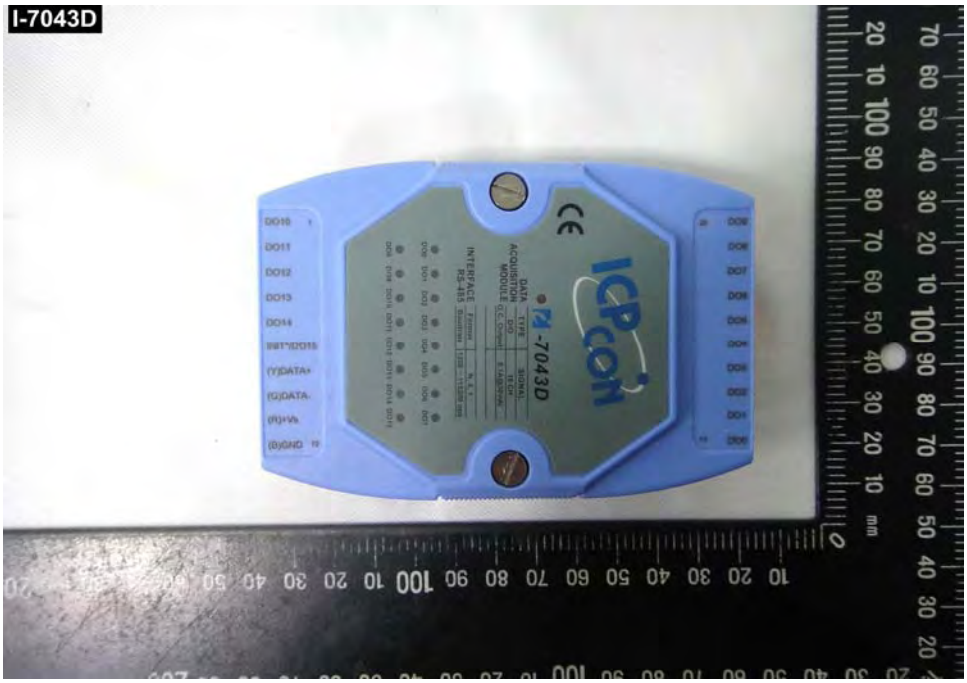

(92)EUT Photo

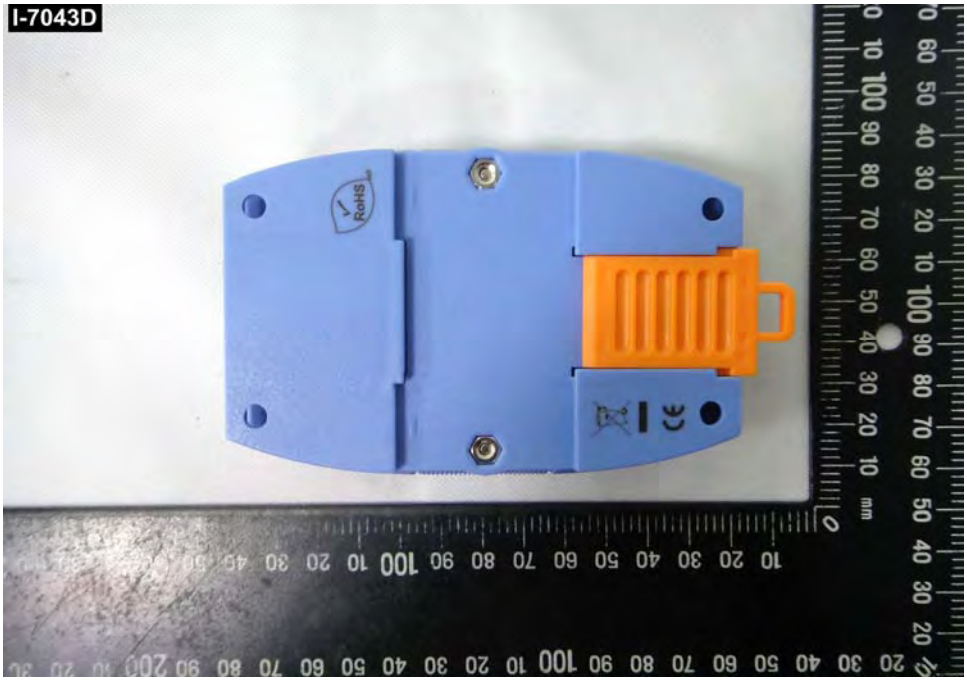

(93)EUT Photo

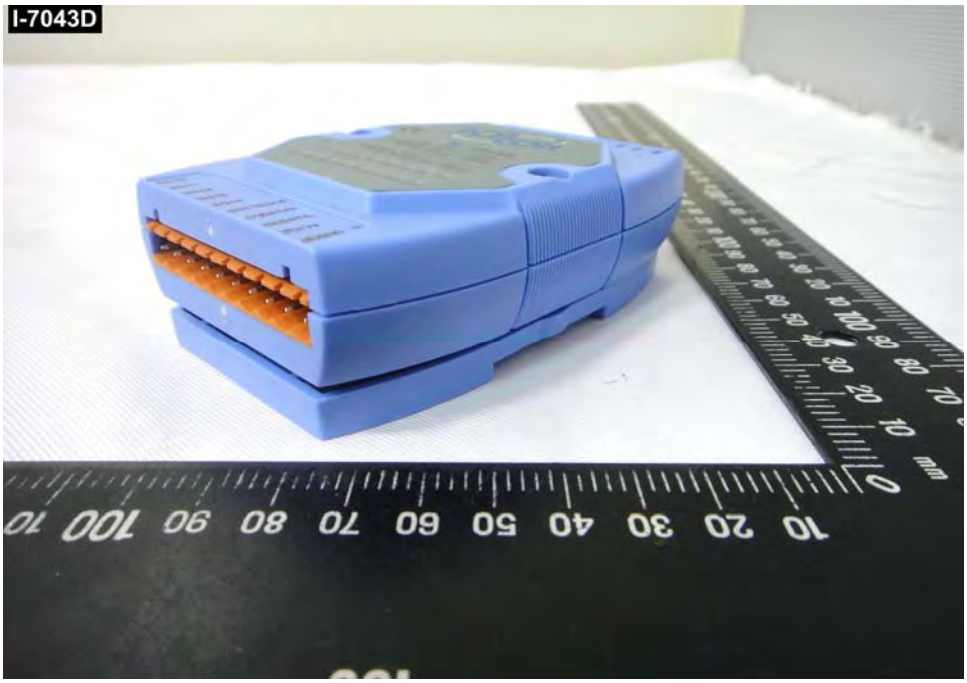

(94)EUT Photo

(95)EUT Photo

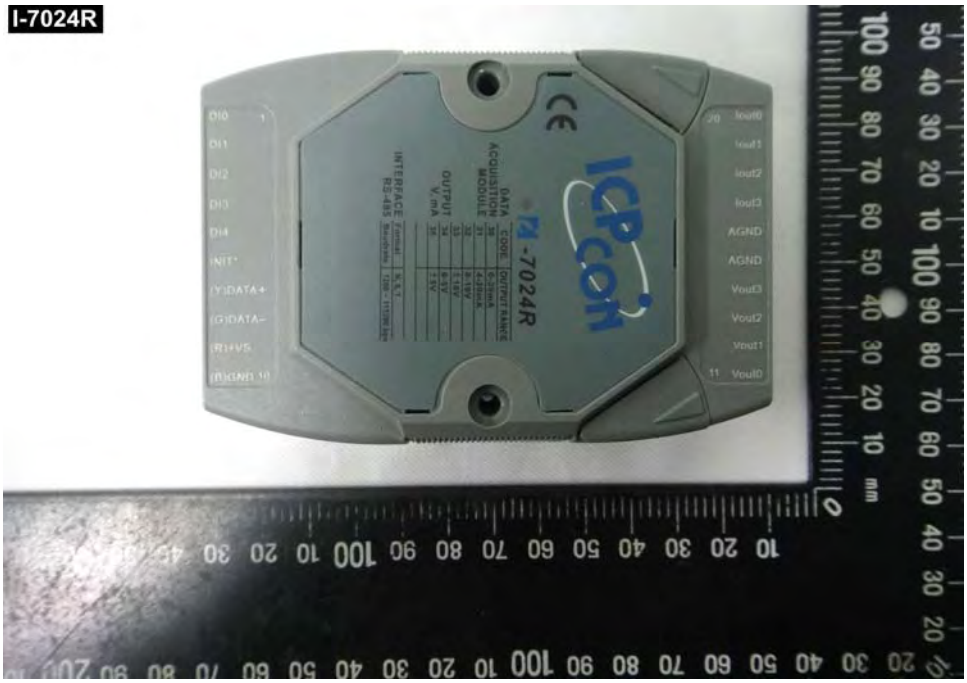

(96)EUT Photo

(97)EUT Photo

(98)EUT Photo

(99)EUT Photo

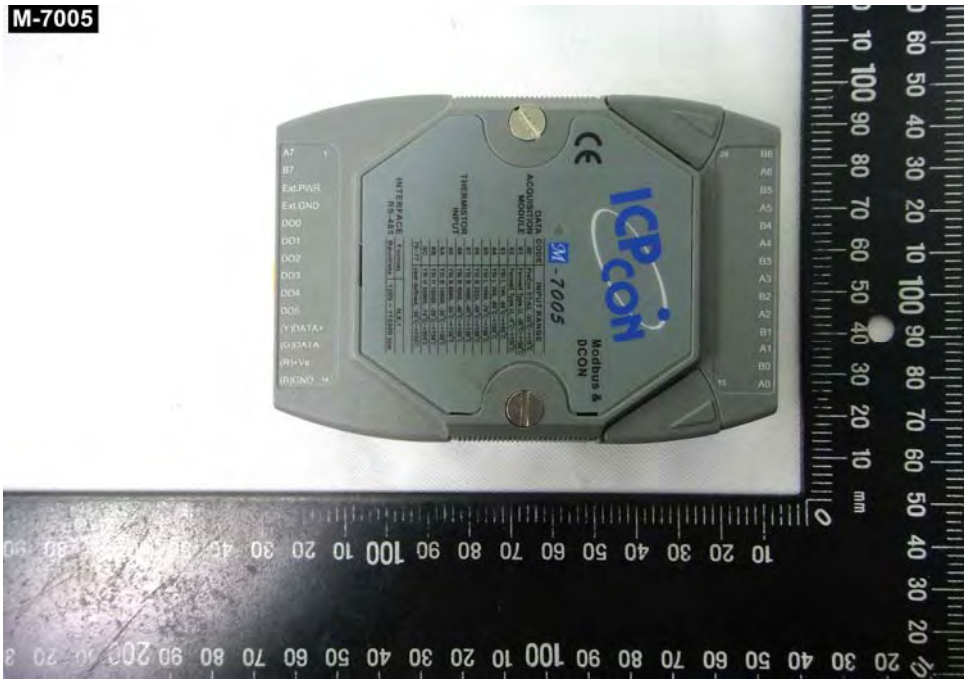

(100)EUT Photo

(101)EUT Photo

(102)EUT Photo

(103)EUT Photo

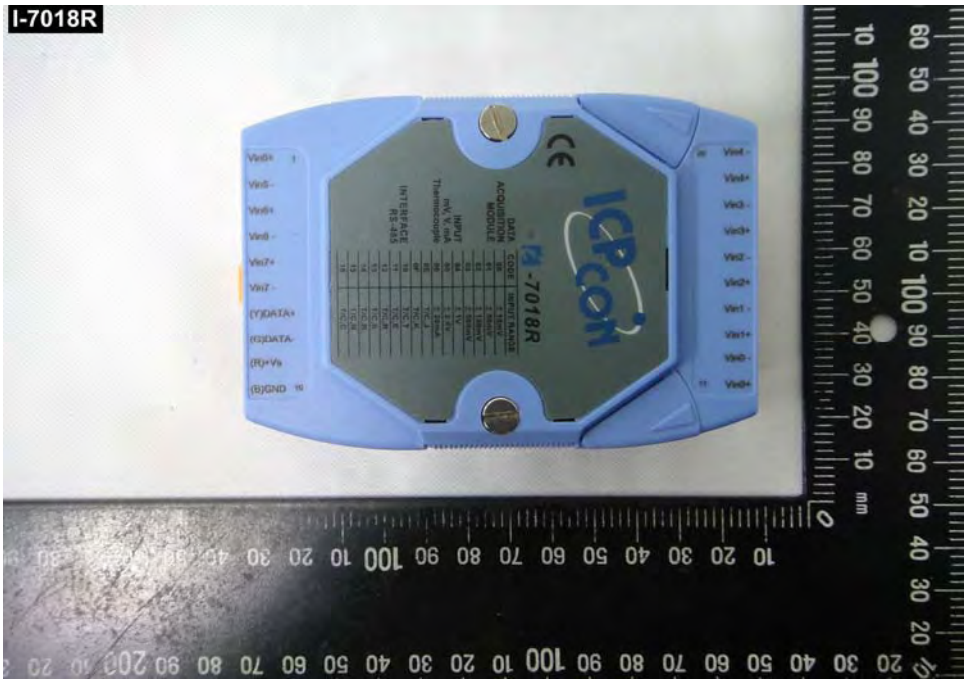

(104)EUT Photo

(105)EUT Photo

(106)EUT Photo

(107)EUT Photo

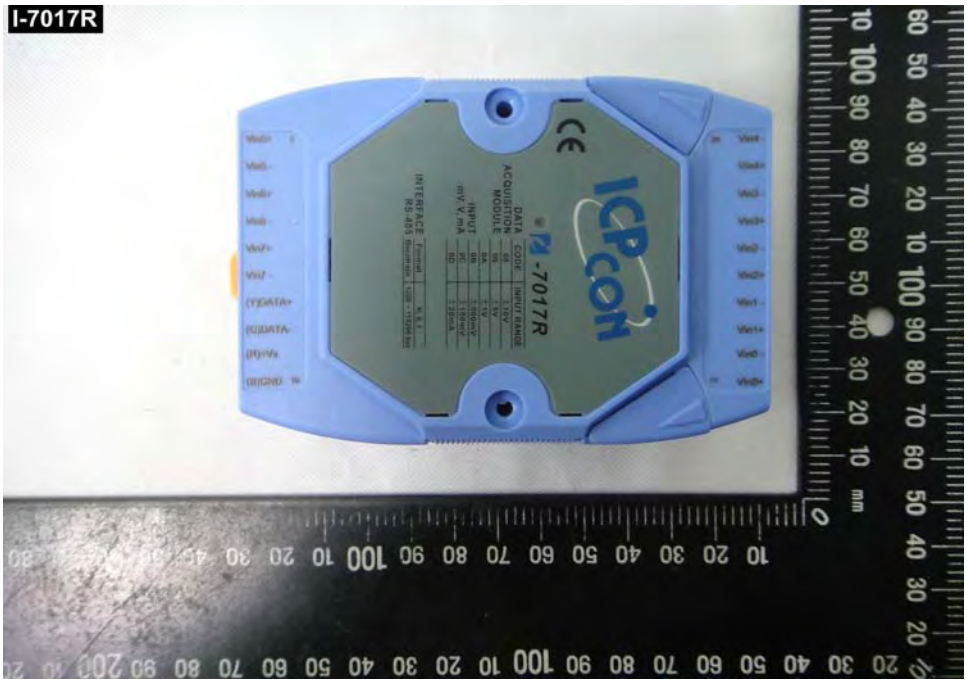

(108)EUT Photo

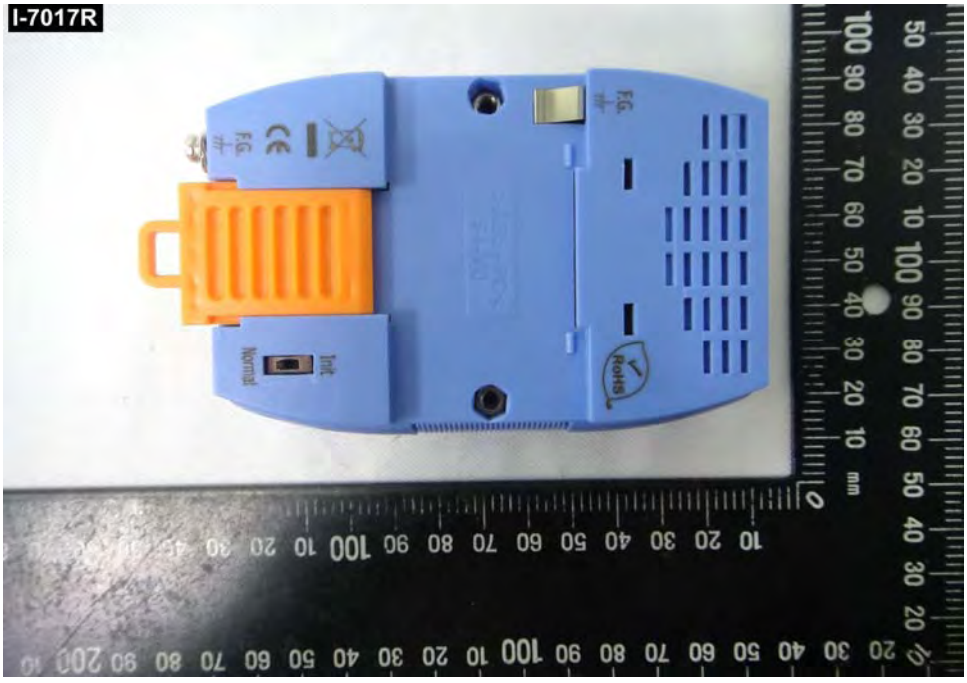

(109)EUT Photo

(110)EUT Photo

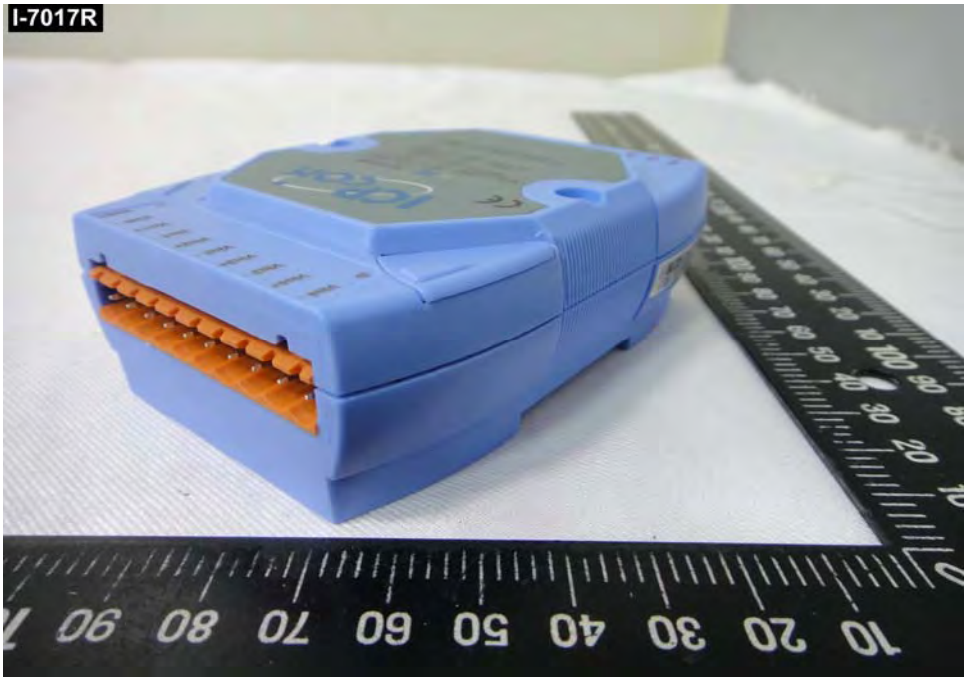

(111)EUT Photo

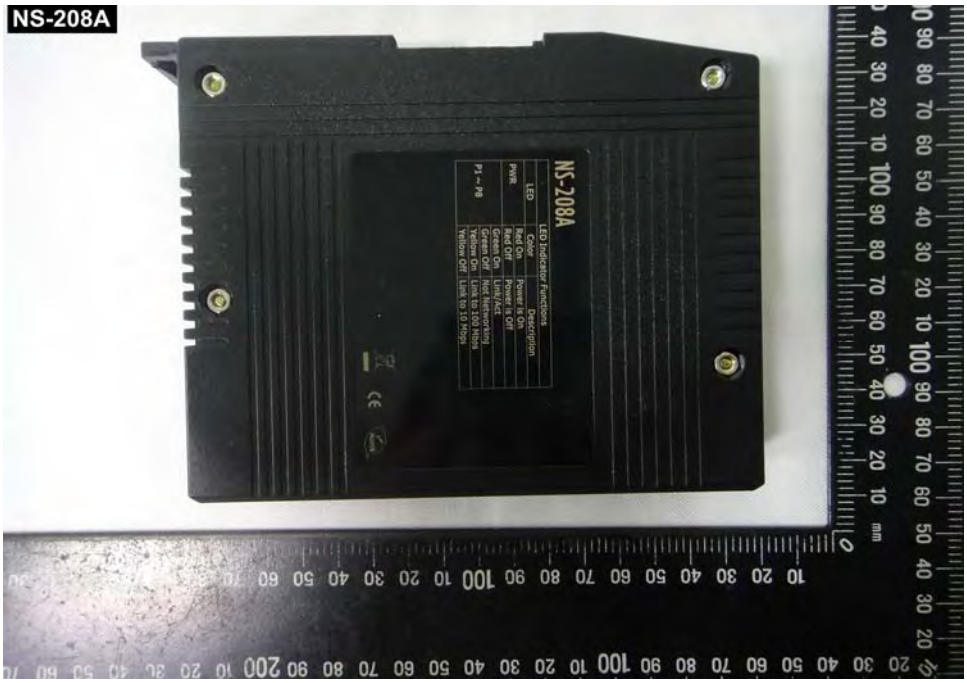

(112)EUT Photo

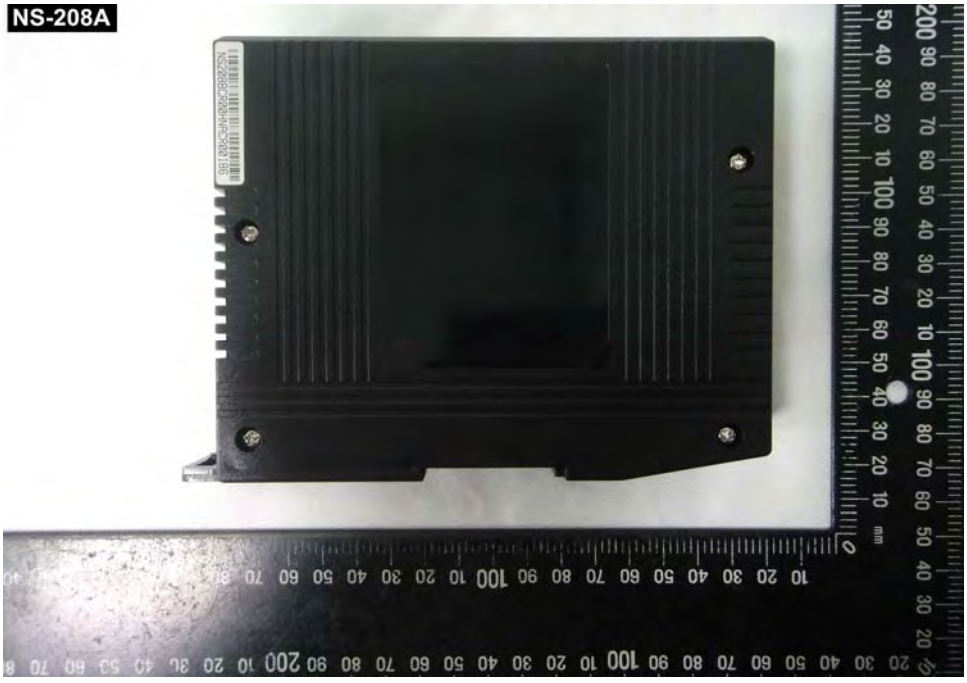

(113)EUT Photo

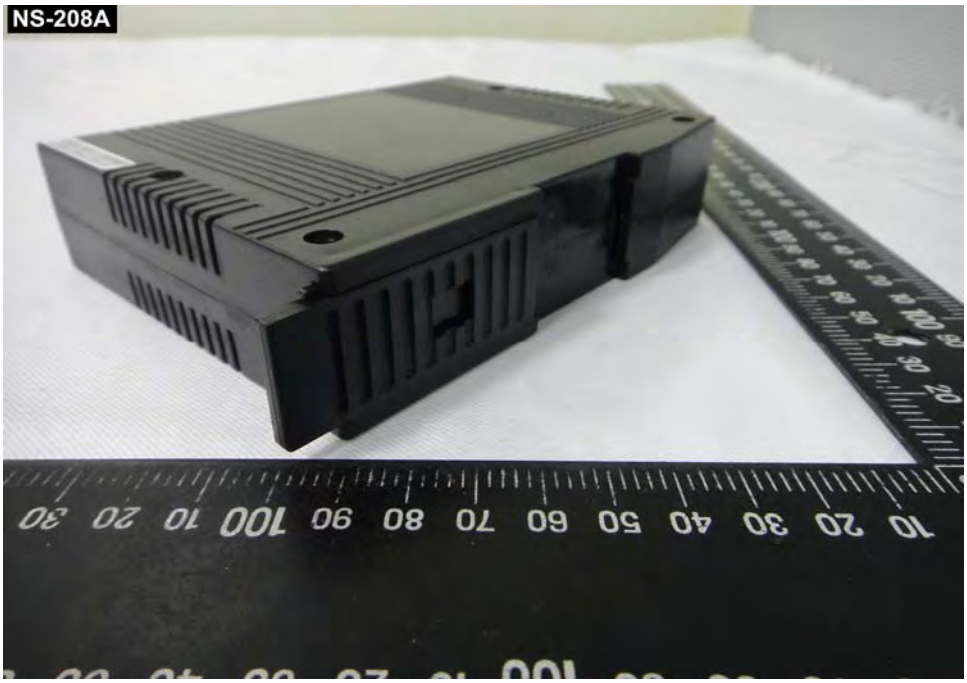

(114)EUT Photo

(115)EUT Photo

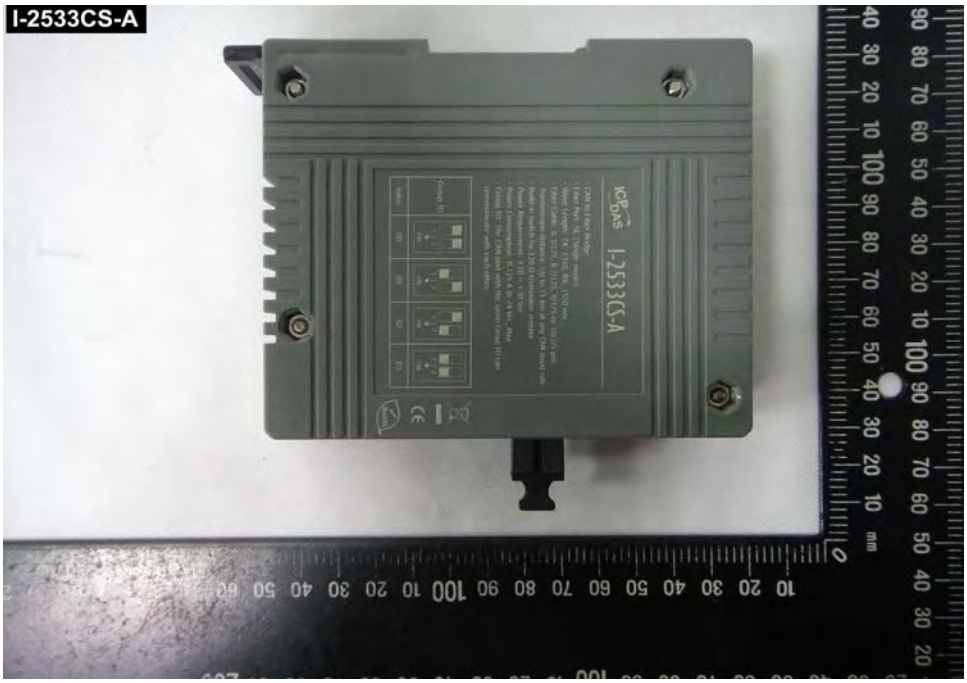

(116)EUT Photo

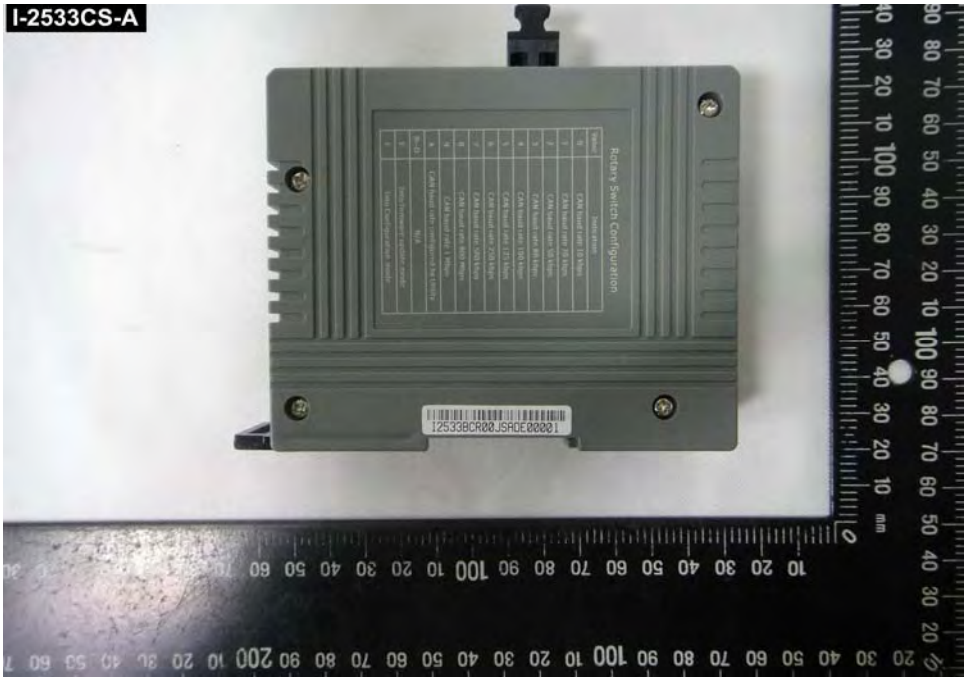

(117)EUT Photo

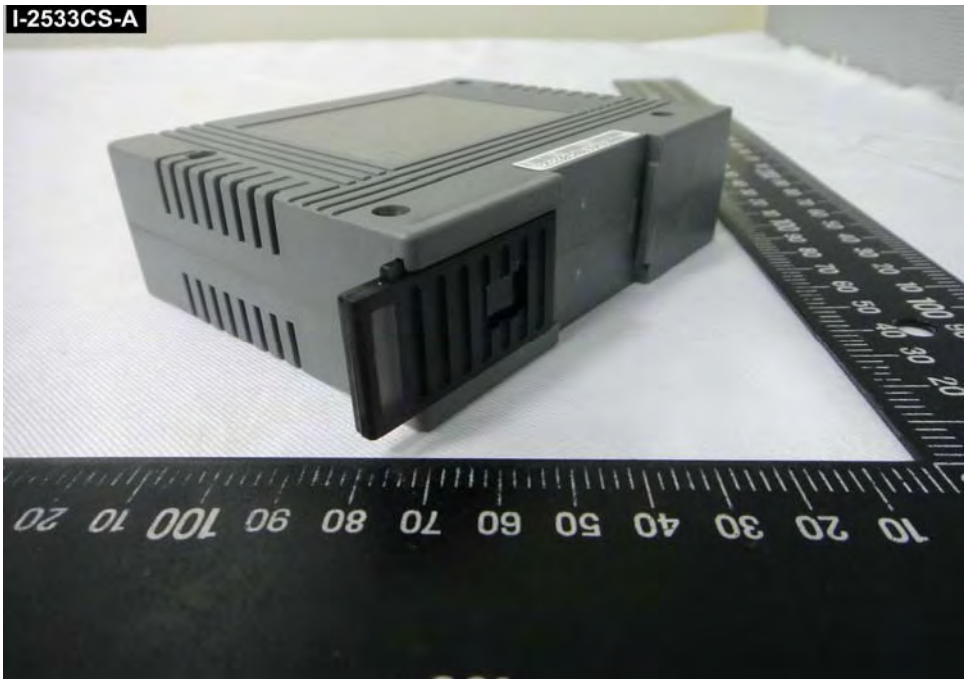

(118)EUT Photo

(119)EUT Photo

(120)EUT Photo

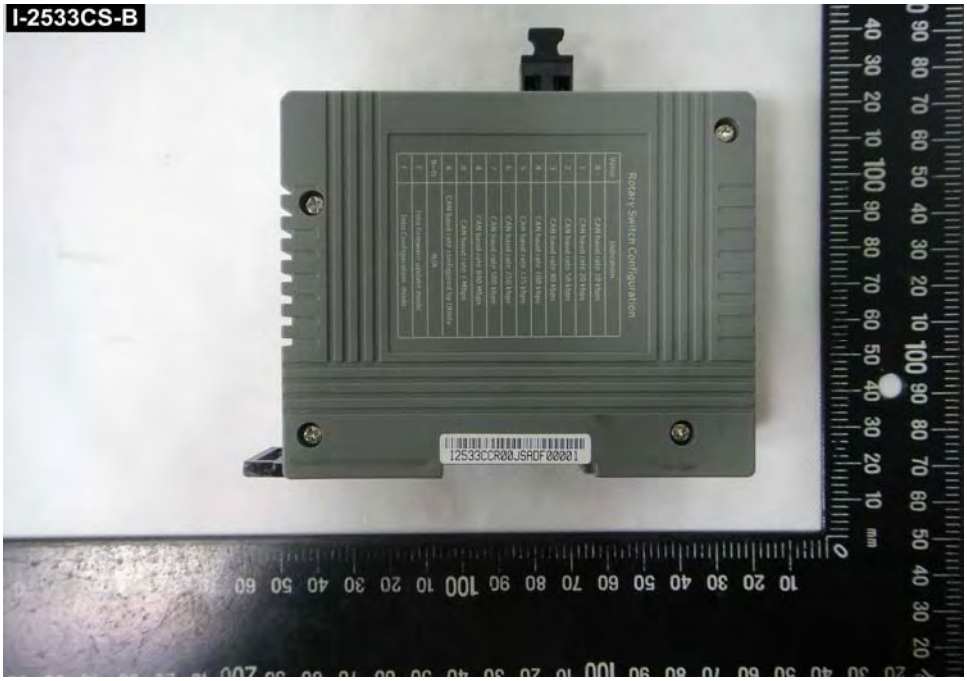

(121)EUT Photo

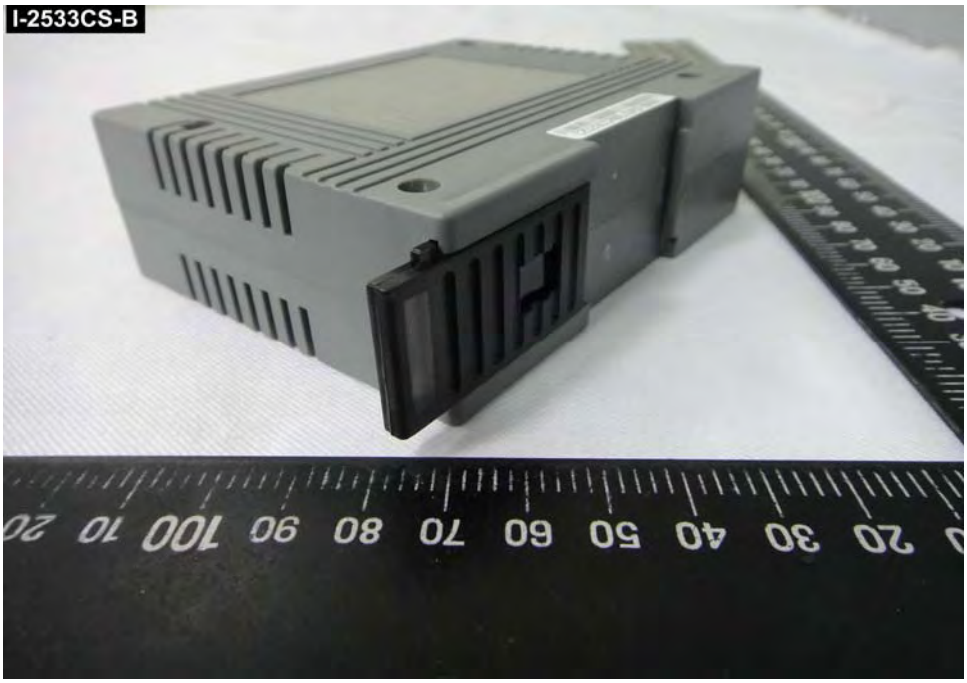

(122)EUT Photo

(123)EUT Photo

(124)EUT Photo

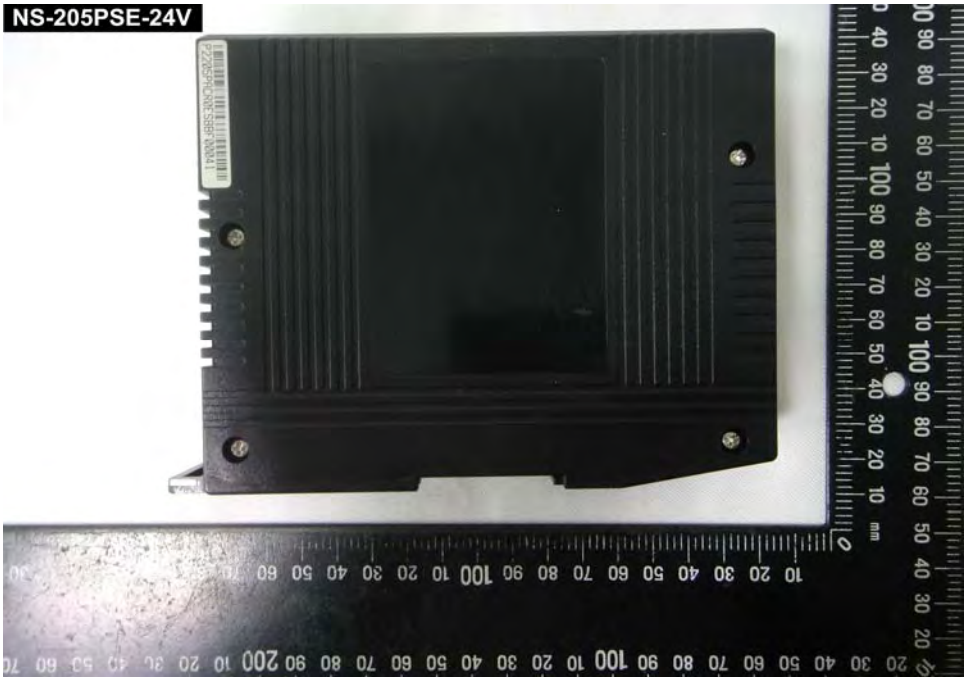

(125)EUT Photo

(126)EUT Photo

(127)EUT Photo

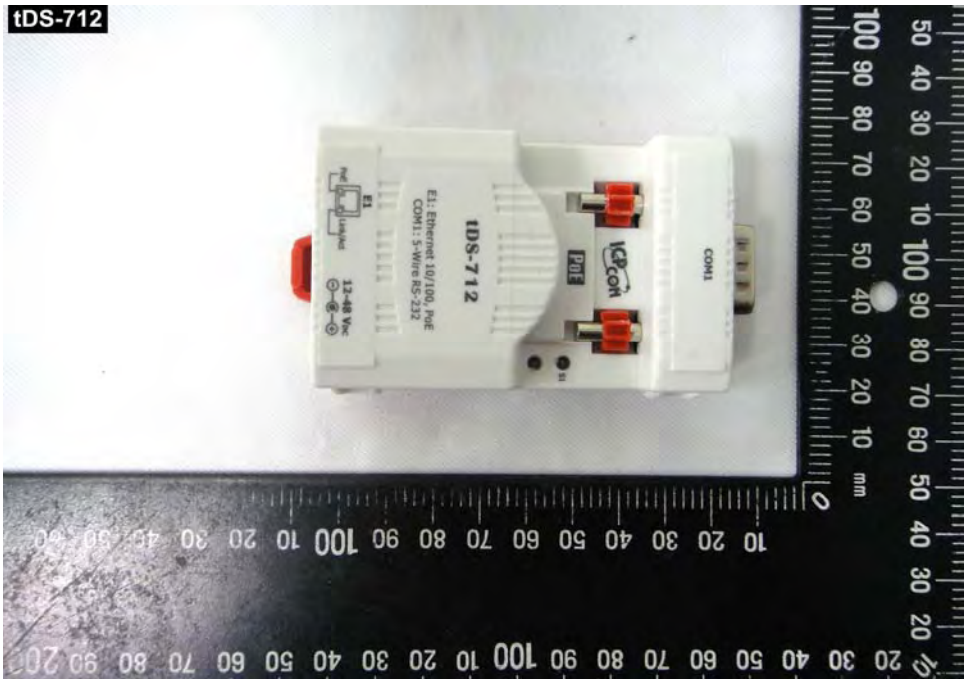

(128)EUT Photo

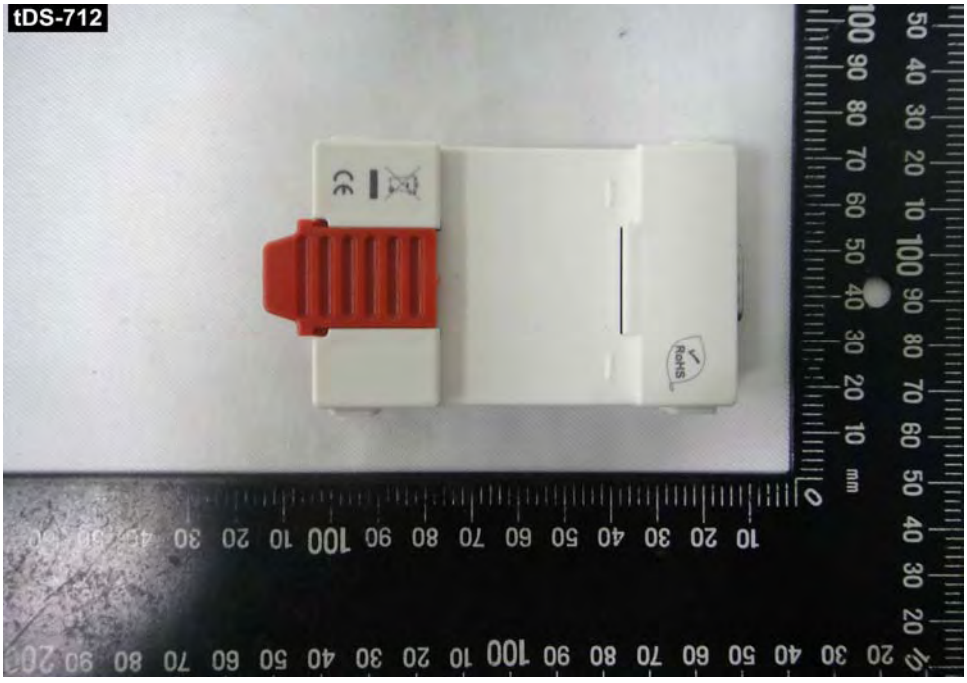

(129)EUT Photo

(130)EUT Photo

(131)EUT Photo

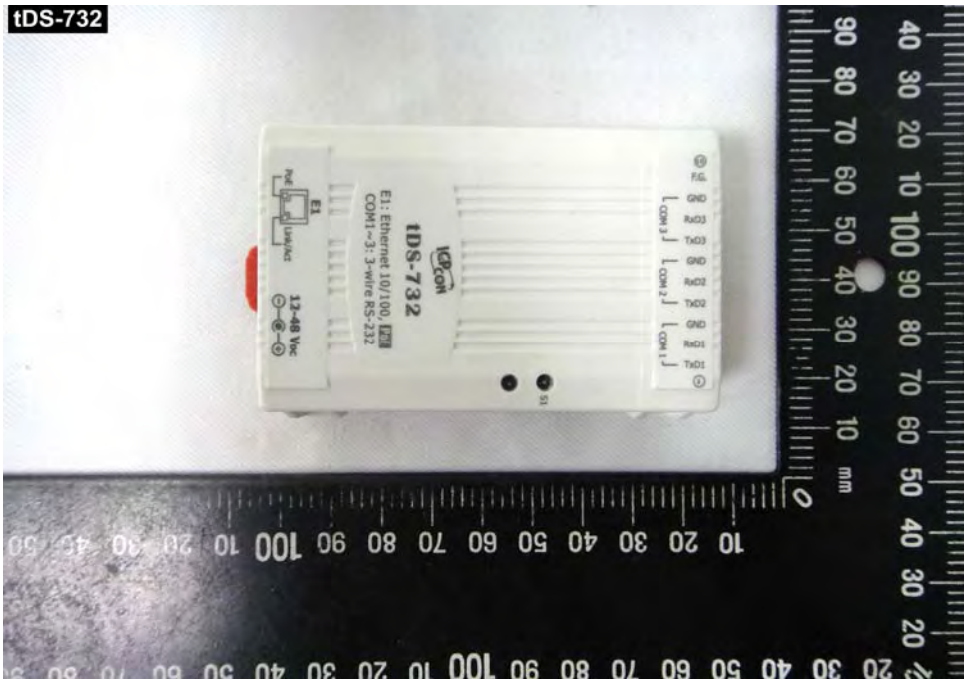

(132)EUT Photo

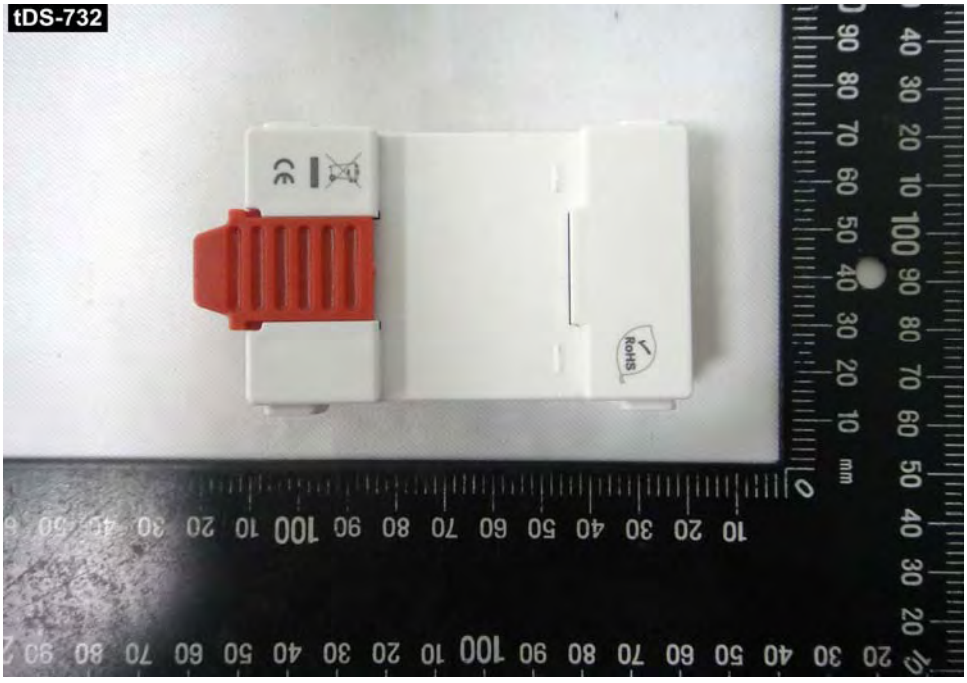

(133)EUT Photo

(134)EUT Photo

(135)EUT Photo

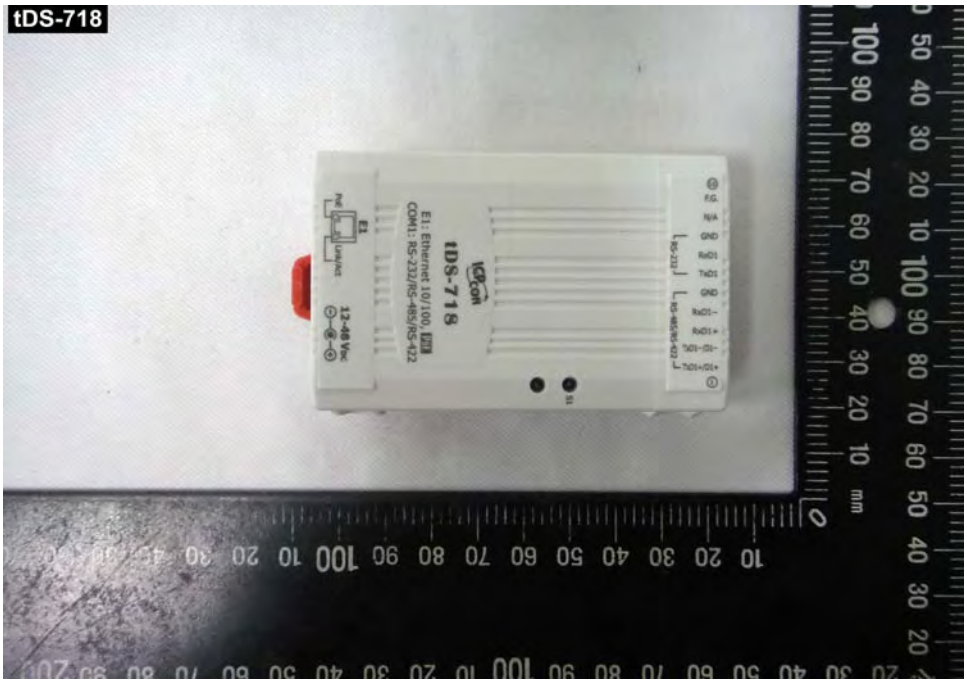

(136)EUT Photo

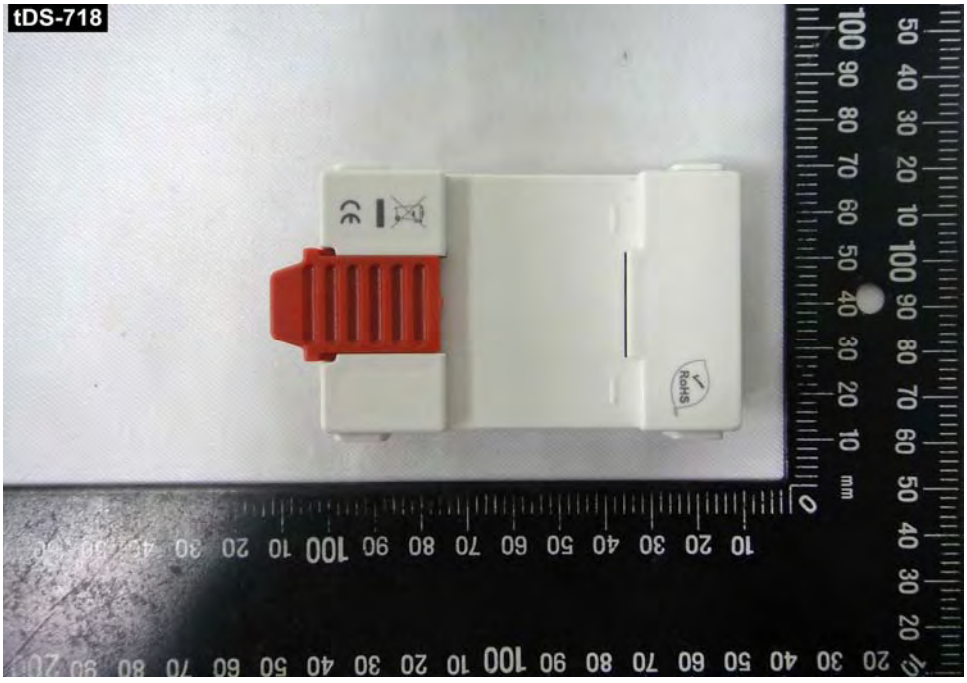

(137)EUT Photo

(138)EUT Photo

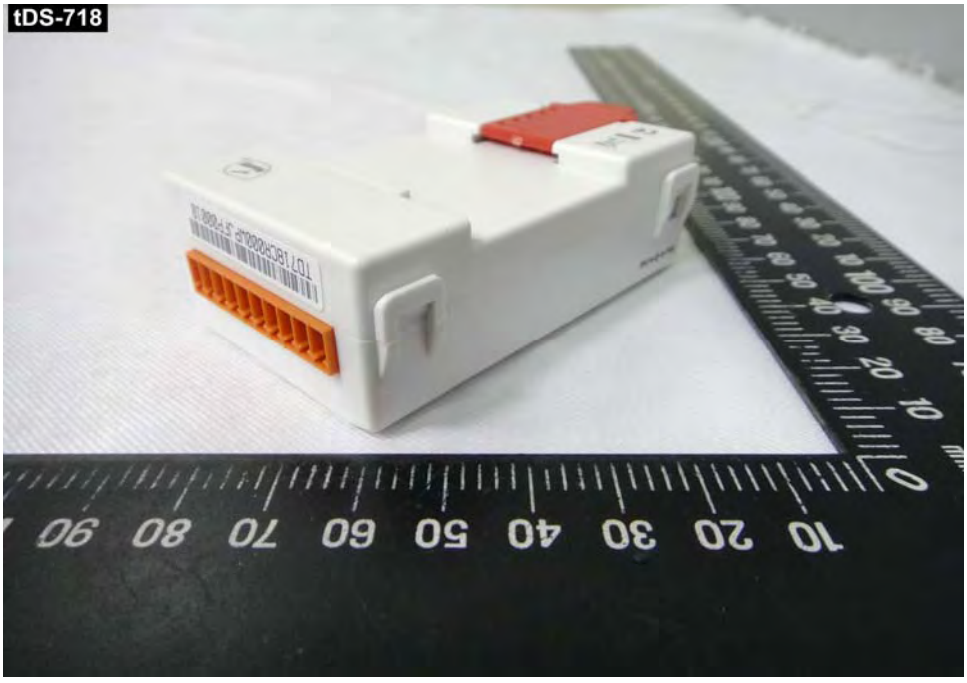

(139)EUT Photo

(140)EUT Photo

(141)EUT Photo

(142)EUT Photo

(143)EUT Photo

(144)EUT Photo

(145)EUT Photo

(146)EUT Photo

(147)EUT Photo

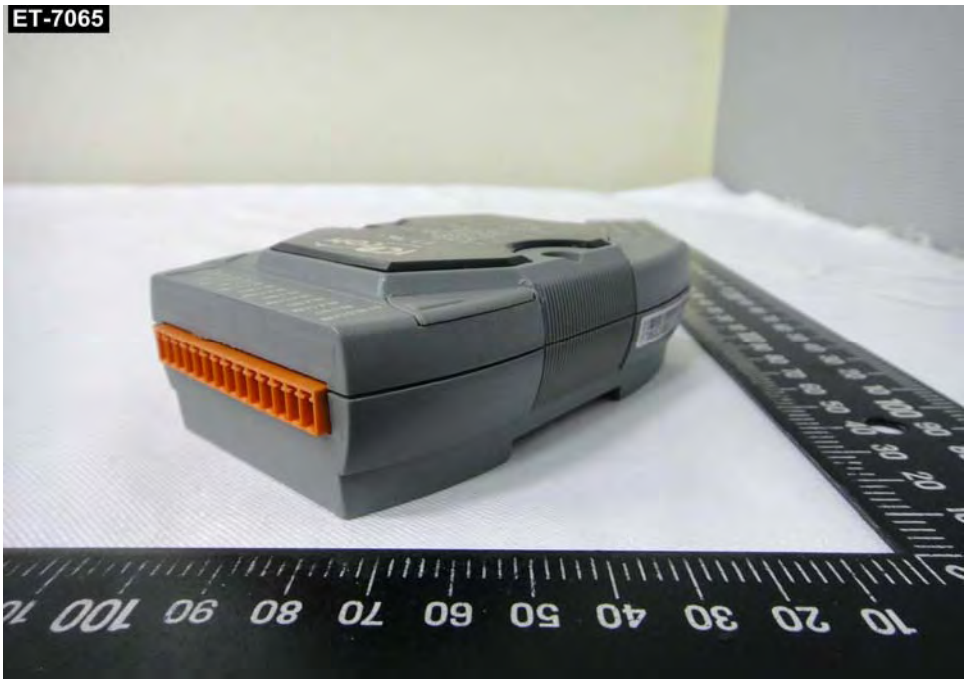

(148)EUT Photo

(149)EUT Photo

(150)EUT Photo

(151)EUT Photo

(152)EUT Photo

(153)EUT Photo

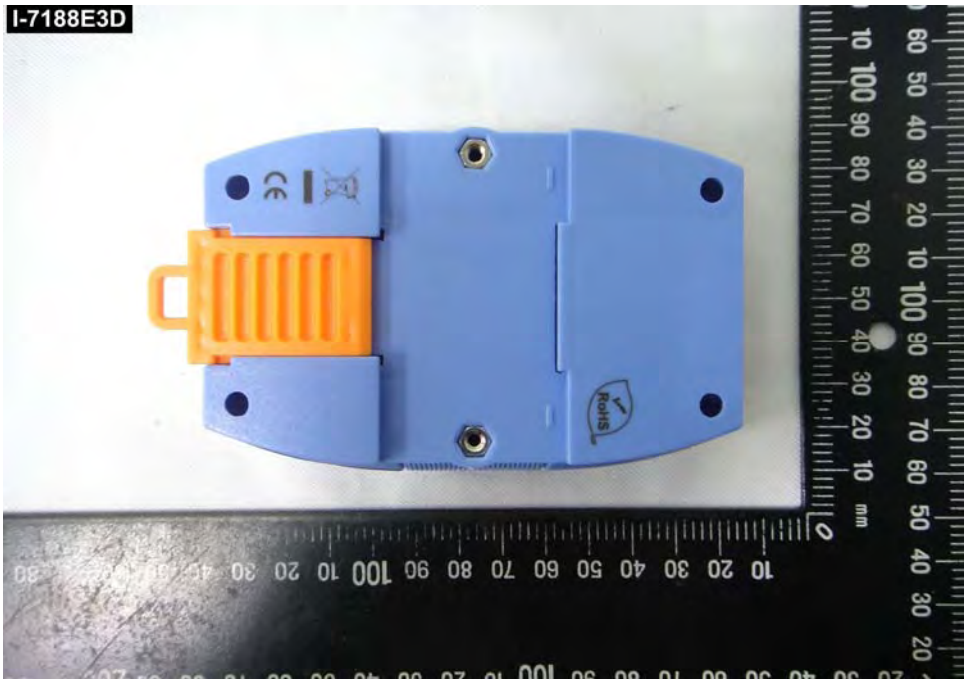

(154)EUT Photo

(155)EUT Photo

(156)EUT Photo

(157)EUT Photo

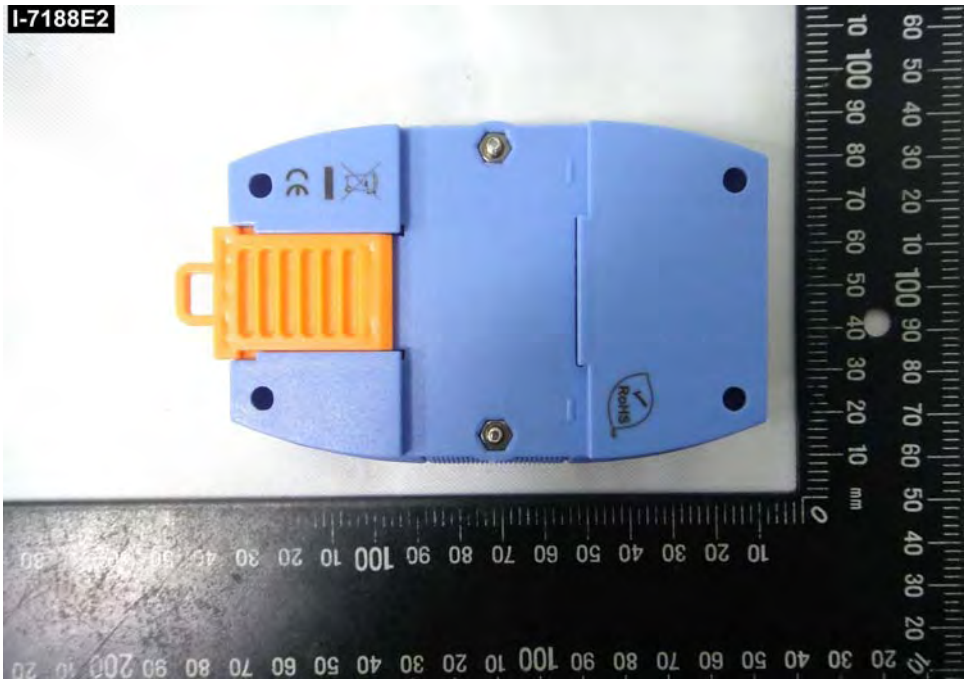

(158)EUT Photo

(159)EUT Photo

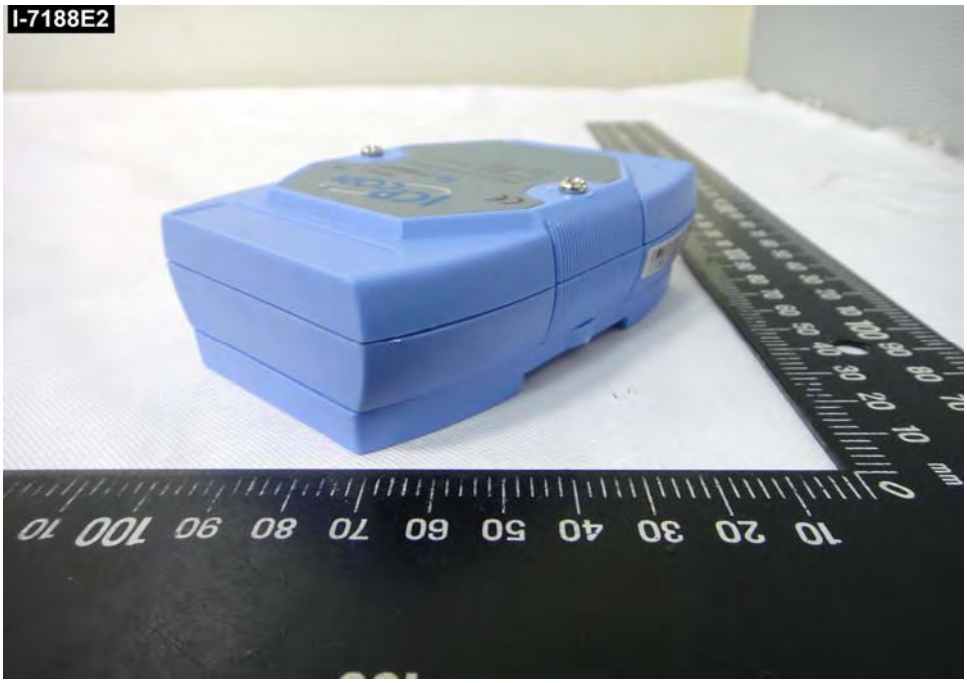

(160)EUT Photo

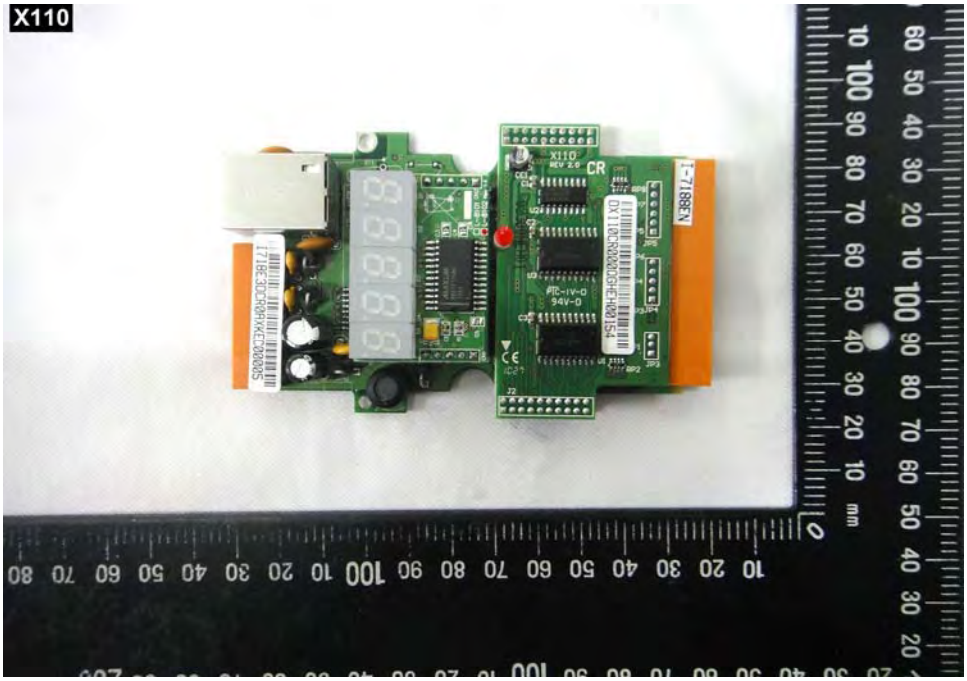

(161)EUT Photo

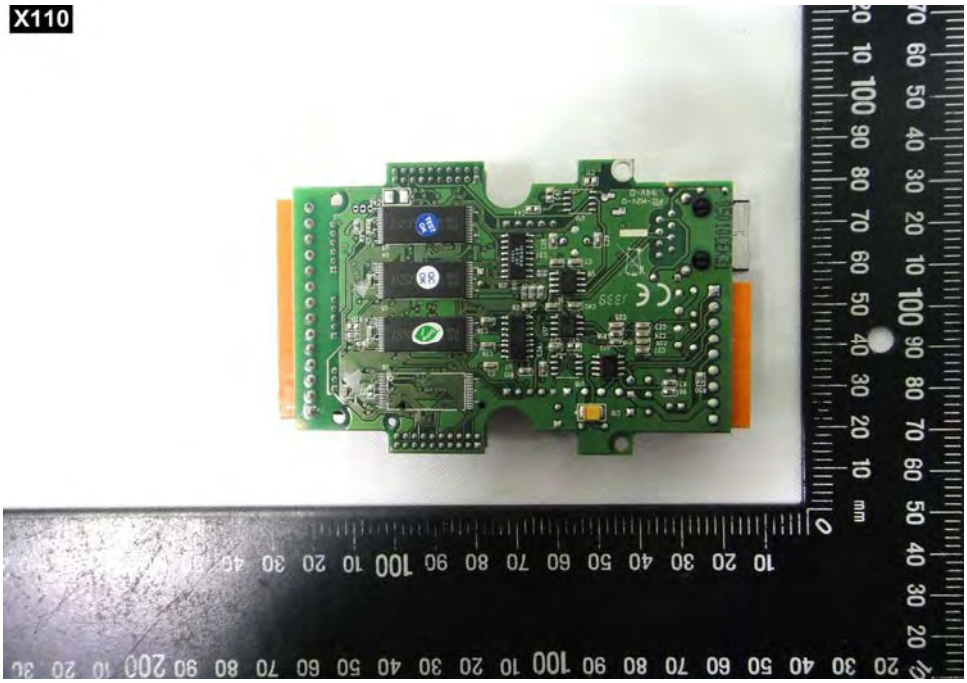

(162)EUT Photo

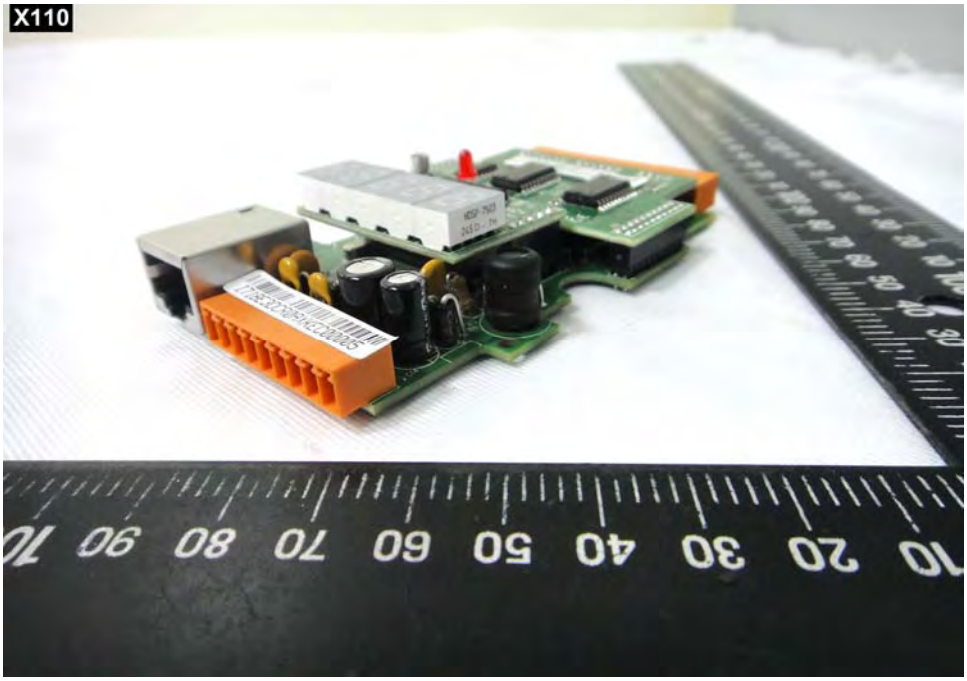

(163)EUT Photo